

**VES DETACHMENT
50 PATIENT SMALL
ANIMAL**

**Support and Consumables
Handbook**

6545-01-508-7015

UA 4905

LIN M30136

ARCHIVED

December 2007

U.S. Army Medical Materiel Agency

The information contained in this manual was prepared
by the U.S. Army Medical Materiel Agency,
Materiel Acquisition Directorate,
Equipment Publications Division,
Fort Detrick, MD

This manual is still in draft form and may contain inaccuracies. To report inaccuracies or additions, please contact:

**Customer Relations Management
301-619-4301/4316, DSN 343-4301/4316,
or at USAMMACRM@amedd.army.mil.**

Responses may also be mailed to:

**Commander
U.S. Army Medical Materiel Agency
MCMR-MM0-AP
1423 Sultan Drive, Suite 100
Fort Detrick, MD 21702-5001**

NOTE: CLICK ON TITLE
FOR DIRECT LINK

TABLE OF CONTENTS

<u>SECTION NO.</u>	<u>DEVICE</u>	<u>NSN</u>	<u>PAGE NO.</u>
1	<u>ANALYZER BLOOD GAS W/HARD CASE I-STAT</u>	(J) 6630-01-526-7377	1
2	<u>ANESTHESIA MACHINE PORTABLE COMPACT</u>	(J) 6515-01-503-5331	7
3	<u>CENTRIFUGE LABORATORY</u>	(L) 6640-01-530-9848	13
4	<u>CENTRIFUGE LABORATORY F/MICRO HEMATOCRIT W/CASE</u>	(L) 6640-01-531-1373	19
5	<u>CHEMISTRY ANALYZER FIELD DEPLOYMENT PACKAGE, PICOLLO</u>	(J) 6630-01-497-7291	21
6	<u>CLEANER VACUUM ELECTRIC</u>	(J) 7910-01-327-0757	25
7	<u>CLIPPER KIT,ANIMAL</u>	(L) 3770-01-529-6860	29
8	<u>COMPUTED RADIOGRAPHY PORTABLE</u>	(J) 6525-01-504-5002	33
9	<u>CONCENTRATOR OXYGEN 1-5 LPM</u>	(J) 6515-01-434-4629	39
10	<u>CONTAINER TRANSPORT THERMAL</u>	(L) 6530-01-505-5301	41
11	<u>CUTTER ORTHOPEDIC CAST STRYKER</u>	(J) 6515-00-323-4510	43
12	<u>DIAGNOSTIC KIT OPHTHALMOSCOPE AND OTOSCOPE</u>	(L) 6515-01-529-8155	45
13	<u>ELECTROSURGICAL APPARATUS MOBILE</u>	(J) 6515-01-532-3321	53
14	<u>FIXATION KIT EXTERNAL VETERINARY</u>	(L) 6515-01-540-0369	63
15	<u>LARYNGOSCOPE SET ANESTHESIA FIBER OPTIC</u>	(L) 6515-01-519-4529	71
16	<u>LIGHT HEAD GENERAL PURPOSE</u>	(J) 6230-01-520-3474	75
17	<u>LIGHT SURGICAL STAND</u>	(J) 6530-01-518-9854	79
18	<u>MICROSCOPE OPTICAL LAB GENERAL PURPOSE</u>	(J) 6650-01-519-8473	81
19	<u>MONITOR VITAL SIGNS W/SPO2,WCAPNO</u>	(J) 6515-01-432-2711	85
20	<u>PATIENT WARMING SYS (Bair Hugger)</u>	(J) 6530-01-463-6823	97
21	<u>PUMP,INTRAVENOUS, ALARIS</u>	(J) 6515-01-486-4310	101
22	<u>PUMP, INFUSION AUTO SYRINGE, BAXTER</u>	(J) 6515-01-496-4213	103
23	<u>REFRACTOMETER HAND</u>	(L) 6650-00-933-3218	105
24	<u>REFRIGERATOR FREEZER</u>	(J) 4110-01-425-8009	107
25	<u>SCALE WEIGHING</u>	(L) 6670-01-529-5385	109
26	<u>SCREEN X-RAY PROTECTIVE MOBILE 6FT</u>	(L) 6525-01-166-9033	113
27	<u>SINK UNIT SURGICAL SCRUB AND UTENSIL</u>	(J) 6530-01-429-6715	115
28	<u>STERILIZER SURGICAL INSTRUMENT STEAM</u>	(J) 6530-01-531-4807	117
29	<u>SUCTION APP SURG PROG</u>	(J) 6515-01-435-0050	121
30	<u>TABLE OPERATING FIELD</u>	(J) 6530-01-321-5592	125
31	<u>ULTRASOUND SYSTEM PORTABLE</u>	(J) 6525-01-503-7182	147
32	<u>XRAY APPARATUS RAD</u>	(J) 6525-01-523-1989	159

ANALYZER BLOOD GAS W/HARD CASE I-STAT TOC

ABBOTT LABORATORIES INC

MODEL # 04J48-20

Manufacturer's Phone: (609) 443-9300 FAX: (609) 443-9310

Website: <http://www.abbott.com>

AAC "J" ITEM NSN 6630-01-526-7377

UA's: 3263, 3267, 4905, 4912, 5267, 9410, N303, N503, N703

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$11,589.07

System Description: Point-of-use blood analyzer for the measurement of blood gases and electrolytes. Utilizes 2 to 3 drops of fresh whole blood in a disposable test cartridge that is inserted into the handheld analyzer. The cartridge self-calibrates miniaturized sensors upon insertion into the analyzer. Results are displayed in less than 2 minutes. Records and automatically stored (up to 50) for printing and/or transmission. A daily quality control of less than 60 seconds is required. Upon completion, all blood and calibrant fluid is contained within the cartridge for safe bio-hazard disposal.


Tests performed:

- 1) **Glu - Glucose**
- 2) **pH -**
- 3) **pCO₂**
- 4) **Bicarbonate**
- 5) **Total carbon dioxide**
- 6) **Base excess**
- 7) **Sodium**
- 8) **Potassium**
- 9) **Chloride**
- 10) **Urea nitrogen**
- 11) **Hematocrit**
- 12) **Hemoglobin**
- 13) **Anion**

Features:

- **Point-of-use capability.**
- **Weight reduction (GEM STAT – 27 lbs, i-STAT – 18 oz).**
- **Battery backup (12 VDC).**
- **Extensive array of cartridge-based panels.**
- **Small sample size (GEM STAT – 0.5 ml, I-STAT – 65 µL).**



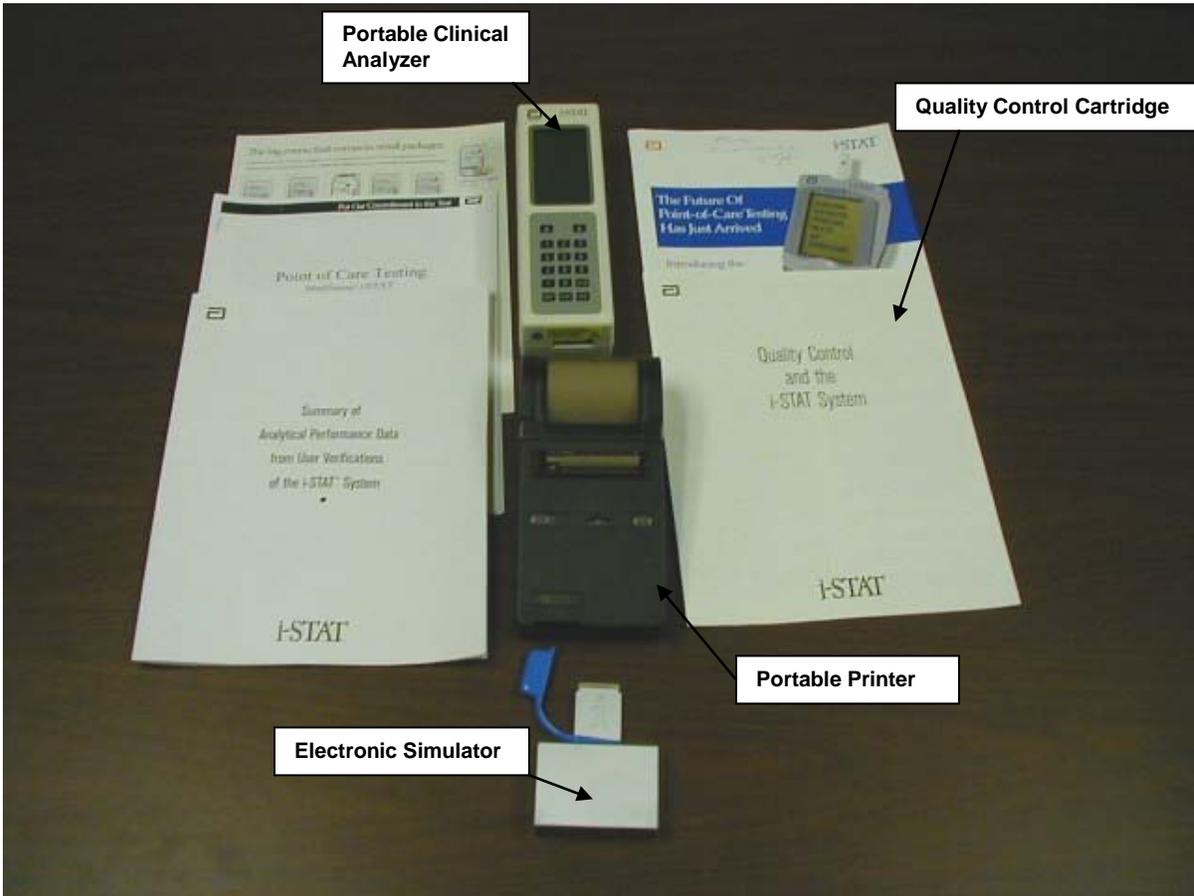

i-STAT PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Analyzer Dimensions	Height	8.26 inches
	Width.	2.52 inches
	Depth.	2.05 inches
Weight		1.15 lbs
Cube		0.024 cu ft
Analyzer Operating Temperature		64° F to 86° F
Analyzer Transport Temperature		14° F to 122° F
Humidity Non-condensing		0 to 90%
Power Requirements		Two 9-volt batteries

i-STAT ACCESSORIES (START-UP) PACKAGE

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6630014222097	Included w/ NSN	ELECTRONIC SIMULATOR QUALITY CONTROL TEST CLINICAL ANALYZER	06F11-01	1	EA	\$425.25	\$425.25	ABBOTT LABS	More than 60 days	N	3
6630015264091	Included w/ NSN	PRINTER ANALYZER PORTABLE	06F2391	1	EA	\$291.20	\$291.20	ABBOTT LABS	Def.	N	3
6640014195698	Included w/ NSN	PAPER RECORDING CLINICAL ANALYZER USE W/HEWLETT PACKARD PTBL 6S	06F17-11	1	6PG	\$14.70	\$14.70	ABBOTT LABS	Def.	N	3
6630015263620	Included w/ NSN	Downloader/Recharger Serial	06F23-45	1	EA	\$546.25	\$546.25	ABBOTT LABS	Def.	N	3
6630015243128	Included w/ NSN	CARTRIDGE CERAMIC IST	04J51-01	1	EA	\$1.00	\$1.00	ABBOTT LABS	Def.	N	3
6135014217168	Included w/ NSN	BATTERY 9 VOLT NONRECHARGEABLE USED IN HAND-HELD BLOOD GAS ANALYZER	6F2126	1	6PG	\$70.00	\$70.00	I-STAT CORP	Def.	N	3
6630015264098	Included w/ NSN	BATTERY ANALYZER RECHARGEABLE	06F23-55	1	EA	\$42.96	\$42.96	ABBOTT LABS	Def.	N	3
6630015264102	Included w/ NSN	CARRY CASE ANALYZER	06F16-79	1	EA	\$1715.48	\$1715.48	ABBOTT LABS	Def.	N	3
7610015074390	Included w/ NSN	MANUAL TECHNICAL OPERATOR'S MANUAL	06F16-30	1	EA	\$25.00	\$25.00	ABBOTT LABS	Def.	N	3
6630014878851	Included w/ NSN	KIT PC DOWNLOAD	06F22-16	1	EA	\$350.00	\$350.00	I-STAT CORP	Def.	N	3
7610015225863	Included w/ NSN	SYSTEM MANUAL (MODEL 200)	06F20-01	1	EA	\$78.75	\$78.75	ABBOTT LABS	Def.	N	3
5975014195735	Included w/ NSN	ADAPTER, AC/DC, PORTABLE PRINTER	06F17-12	1	EA	\$17.19	\$17.19	ABBOTT LABS	Def.	N	3
7610015225865	Included w/ NSN	IMPLEMENTATION GUIDE	63400	1	EA	\$1.00	\$1.00	ABBOTT LABS	Def.	N	3
6630015221706	Included w/ NSN	HARDENED CASE	06F16-77	1	EA	\$1,716.77	\$1,716.77	ABBOTT LABS	Def.	N	3

ITEMS FOUND IN THE UNIT ASSEMBLAGE SUPPORTING THE i-STAT

6550014318279	IN THE UA PUSH PACKAGE	CONTROL BLD CHEM U/W G E3+ G3+ EC4+ 6+ EG6+ EC6+ & EC8 1.7ML	06F12-01	1	PG	\$13.18	\$13.18	ABBOTT LABS	6	Y	3
6550014323696	IN THE UA PUSH PACKAGE	CONTROL BLD CHEM USE W/G E3+ G3+ EC4+ 6+ EG6+ EC6+ EC8 1.7ML	06F14-01	1	PG	\$19.60	\$19.60	ABBOTT LABS	6	Y	3
6550015344571	IN THE UA PUSH PACKAGE	Control Blood Chemistry 3 Levels	06F12-04	1	PG	\$34.13	\$34.13	ABBOTT LABS	18	Y	3
6550015344595	IN THE UA PUSH PACKAGE	Control Blood Chemistry 3 Levels	06F12-06			\$34.13	\$34.13	ABBOTT LABS	18	T	3
6550015344571	IN THE UA PUSH PACKAGE	CONTROL BLOOD CHEMISTRY	06F12-04	1	PG	\$34.13	\$34.13	ABBOTT LABS	18	Y	3
6550015344595	IN THE UA PUSH PACKAGE	CONTROL BLOOD CHEMISTRY	06F12-06	1	PG	\$34.13	\$34.13	ABBOTT LABS	180	Y	3
6550014338679	IN THE UA PUSH PACKAGE	TEST PACK SOD K CHL25	06F04-01	1	PG	\$333.83	\$333.83	ABBOTT LABS	2	Y	3

i-STAT (START-UP) AND (RESUPPLY) CONSUMABLES PACKAGE

NSN	Nomenclature	PN	QT Y	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks	NOTES
6135009857845	BATTERY NONRECHARGEABLE ALKALINE AA 1.5V 1 YEAR SHELF LIFE	C18.1	1	24sPG	\$7.52	\$7.52	AMERICAN NATIONAL	36	N	3	AA
6135014217168	BATTERY 9 VOLT NONRECHARGEABLE USED IN HAND-HELD BLOOD GAS ANALYZER	6F2126	1	12S/ PG	\$70.00	\$70.00	I-STAT	Indef.	N	3	LITHIUM
6640014195698	PAPER RECORDING CLINICAL ANALYZER USE W/HEWLETT PACKARD PTBL 6S	06F- 1711	1	PG	\$15.40	\$15.40	I-STAT	Indef.	N	3	All ctrls are good for 1 yr if refrig
6550014318279	CONTROL BLD CHEM U/W G E3+ G3+ EC4+ 6+ EG6+ EC6+ & EC8 1.7ML	06F12- 01	1	PG	\$13.18	\$13.18	ABBOTT LABORATORIES	6	Y	3	All test pks will last only 2 wks at room temp if not refrig
6550014323696	CONTROL BLD CHEM USE W/G E3+ G3+ EC4+ 6+ EG6+ EC6+ EC8 1.7ML	06F14- 01	1	PG	\$19.60	\$19.60	ABBOTT LABORATORIES	6	Y	3	All test pks will last only 2 wks at room temp if not refrig
6550014338679	TEST PACK SOD K CHL25	06F04- 01	1	PG	\$333.83	\$333.83	ABBOTT LABORATORIES	2	Y	3	All test pks will last only 2 wks at room temp if not refrig
6550015344571	CONTROL BLOOD CHEMISTRY	06F12- 04	1	PG	\$34.13	\$34.13	ABBOTT LABS	18	Y	3	All test pks will last only 2 wks at room temp if not refrig
6550015344595	CONTROL BLOOD CHEMISTRY	06F12- 06	1	PG	\$34.13	\$34.13	ABBOTT LABS	180	Y	3	All test pks will last only 2 wks at room temp if not refrig

ANESTHESIA MACHINE PORTABLE COMPACT TOC

**OCEANIC MEDICAL PRODUCTS INC
MODEL # 2200**

Manufacturer's Phone: (913) 874-2000 FAX: (913) 874-2005

Website: <http://www.oceanicmedical.com>

AAC "J" ITEM NSN 6515-01-503-5331

UA's: 4901, 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$22,805.00

System Description: The Magellan-2200 Anesthesia Machine is compact, robust and flexible, easy to move and was designed for military field hospitals, general civilian hospitals, office-based anesthesia and surgery centers of every description. It is pneumatically powered and contains an electronic ventilation monitor that is A/C or battery powered. The Magellan-2200 may be mounted on a tabletop or on a mobile cart. The unit is designed as a simple to operate unit containing all of the modes and necessary components to deliver a basic anesthetic, including a mechanical ventilator and a single agent vaporizer. All of the safety systems required are employed onboard and easy to utilize.

Tests performed: All Anesthesia cases with a single agent vaporizer.



**Magellan 2200 Portable Anesthesia Machine NSN
6515-01-533-0968
PART# OMP-2200M1**




**Anesthesia Hardened Case
(ARMY Case is Gray)
NSN 6515-01-533-1279
PART# O-A104**



Anesthesia Unit with Hardened Case



Lid of Anesthesia Case with Components

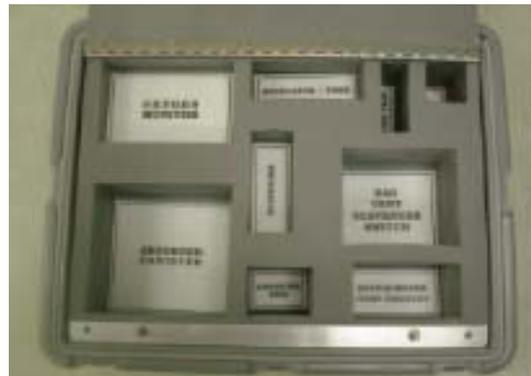

**Nomenclature of Components for the Lid
of Anesthesia**



Air Compressor Case
NSN 4310-01-532-9887
PART# O-A102



Air Compressor
NSN 4310-01-532-9886
PART# O-A101

MAGELLAN PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height	23 inches	12.5"
	Width	17 inches	7.25"
	Depth	23 inches	16"
	Cube	5.20 cu ft	
Weight Anesthesia system	Free Standing	55 lbs case only	100 lbs Machine with accessories
Weight Air Compressor/w case	Free Standing	36 lbs	
Operating Temperature Range		35° F to +160° F	
Relative Humidity (in use)		30 to 90%, non condensing	
Relative Humidity (storage)		40 to 90%, non condensing	
Air Compressor Power Requirements		120 volts, 60 Hz, 5 amps	
Watts		600 watts	

MAGELLAN ANESTHESIA SYSTEM CONSUMABLE AND ACCESSORIES (START-UP)

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refr ig Y/N	CONUS Ship Time, weeks
6515015333323	Included W/NSN	Annual Maintenance kit	O-A108	1	EA	\$600	\$600	Oceanic Medical	Indef	N/A	2
6515015331279	Included W/NSN	Anesthesia Apparatus Case	O-A104	1	EA	\$2000	\$2000	Oceanic Medical	Indef	N/A	2
6515015331216	Included W/NSN	Reusable Bundle	O-A109	1	EA	\$1200	\$1200	Oceanic Medical	Indef	N/A	2
6505014437083	IN THE UA Order Prior to Deployment	SEVOFLURANE LIQUID USP 100ML 6s	NDC0007 4-4456-04	3	PG	\$319.05	\$957.15	Oceanic Medical	24 months	N/A	2
6505015331104	IN THE UA Does not come with the Equip	Sevoflurane Vaporizer	O-25.1/S	1	EA	\$2,200.00	\$2,200.00	Oceanic Medical	Indef	N/A	2
6530015331169	Included W/NSN	Isoflurane Vaporizer	O-25.1/I	1	EA	\$2,200.00	\$2,200.00	Oceanic Medical	Indef	N/A	2
7610015375157	Included W/NSN	CD, Operator/ Service Manual	25	1	EA	\$75	\$75	Oceanic Medical	Indef	N/A	2
6515015331177	Included W/NSN	Oxygen Analyzer	O-A105	1	EA	\$610	\$610	Oceanic Medical	Indef	N/A	2
6515015331174	Included W/NSN	Replacement Sensor for O ² Analyzer	O-105A	1	EA	\$150	\$150	Oceanic Medical	Indef	N/A	2
6530015331102	Included W/NSN	Water Trap	O-A103	1	EA	\$100	\$100	Oceanic Medical	Indef	N/A	2
6515015330980	Included W/NSN	PEEP Valve	O-A110	1	EA	\$120	\$120	Oceanic Medical	Indef	N/A	2
See Resupply	Included W/NSN	9 Volt Battery		1	EA				Indef	N/A	2
See Resupply	Included W/NSN	Battery AA 1.5 volts		1	EA				Indef	N/A	2
4310015329886	Included W/NSN	Air Compressor	O-A101	1	EA	\$1800	\$1800	Oceanic Medical	Indef	N/A	2
4310015329887	Included W/NSN	Compressor Case	O-A102	1	EA	\$500	\$500	Oceanic Medical	Indef	N/A	2
4310015329881	Included W/NSN	Air Compressor with Transport Case	O-A100	1	EA	\$2275	\$2275	Oceanic Medical	Indef	N/A	2
6505001415000	IN THE UA	SOD BICARB USP 1LB	NDC0039 5-2685-01	1	CO	\$2.88	\$2.88	Cardinal Health	Indef	N/A	2
6505013628311	IN THE UA	Soda Lime NF 2.5 lbs Cartridge, 12s	Sodasorb pre pak	6	PG	\$59.12	\$59.12	Grace WR and Co.	24 mo	N/A	2

MAGELLAN ANESTHESIA SYSTEM CONSUMABLE (RESUPPLY)

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6505014437083	IN THE UA ONLY SEVOFLURANE LIQUID USP 100ML 6s	NDC00074-4456-04	2	PG	\$319.05	\$319.05	Oceanic Medical	24 mo	N/A	2
6515015331174	Replacement Sensor for O ² Analyzer	O-105A	1	EA	\$150	\$150	Oceanic Medical	Indef	N/A	2
6530015331102	Water Trap	O-A103	1	EA	\$100	\$100	Oceanic Medical	Indef	N/A	2
6135009002139	9 Volt Battery	MN1604	1	PG	\$10.70	\$10.70	Duracell Inc.	Indef	N/A	2
6135009857845	Battery AA 1.5 volts	C18.1	1	PG	\$4.78	\$4.78	American National Std	Indef	N/A	2
6505001415000	SOD BICARB USP 1LB	NDC00395-2685-01	1	CO	\$2.88	\$2.88	Cardinal Health	Indef	N/A	2
6505013628311	Soda Lime NF 2.5 lbs Cartridge, 12s	Sodasorb pre pak	6	PG	\$59.12	\$59.12	Grace WR and Co.	24 mo	N/A	2
6515015331216	Reusable Bundle	O-A109	1	EA	\$1200	\$1200	Oceanic Medical	Indef	N/A	2

The Reusable Product Bundle Contains:

Mask-Size 0 Mask-Size 1, Quantity 1 Mask-Size 2, Quantity 1 Silicone Face Mask-Size 3, Quantity 1 Silicone Face Mask-Size 4, Quantity 1 Silicone Face Mask-Size 5, Quantity 1 Mask Hook Rings, Quantity 2 72" Silicone Respiration Tubing/16mm, Quantity 2 1.0L Silicone Breathing Bag, Quantity 1	12" Silicone Respiration Tubing/ 16mm, Quantity 1 KAB Absorber (without APL Valve), Quantity 1 Head Strap-Latex Free, Quantity 1 12" Reusable Tubing, Quantity 3 30mm x 19mm Connector, Quantity 1 3.0L Silicone Breathing Bag, Quantity 2 Right Angle Elbow (w/female luer lock), Quantity 1 Ported Y-Connector, Quantity 1 22mm T-Connector, Quantity 1
--	---

Special Note:

The SG's consultant for Nurse Anesthetists has stated that he envisions One Reusable Bundle to accompany each anesthesia machine, and that for deployment the logistician should assume that one of the disposable kits will be used with each surgery patient. Therefore, the logistician should plan for around 10 surgical procedures per machine per day.

AS OF 5 JUL 06, FISCHER SCIENTIFIC HAS NOT PROVIDED REQUESTED RELEVANT INFORMATION TO COMPLETE THIS INSERT

**CENTRIFUGE LABORATORY MULTIPURPOSE
STATSPIN HIGHSPEED TOC**

**Distributed by: FISHER SCIENTIFIC COMPANY LLC
Manufactured by: IRIS SAMPLE PROCESSING (STAT SPIN INC)
MODEL # 22-314934
Distributor's Phone: (412) 490-8908 FAX: (412) 770-2224
Manufacturer's Phone: (781) 551-0100 FAX: (781) 551-0036
Website: <https://www1.fishersci.com/Coupon?gid=138511&cid=1333>
Website: www.statspin.com**

AAC "L" ITEM NSN 6640-01-530-9848

UA's: 4905, 4912

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$2,300.00

System Description: This is a small, quiet, high speed centrifuge with unique exclusive rights drive and suspension system for vibration free operation. It is light weight and rotors can easily be changed with a simple push on/pull off, transforming the centrifuge from hemotocrit to urine sediment to plasma. It is a StatSpin MP centrifuge with RT 12 Tubbe Rotor and RH 12 Hematorit rotor and reader with two place tube rotor for urine and blood tubes and vial of HCT tubes and HCT sealant PAD. It offers microhematocrits and rapid preparation of urine sediment in addition to blood sample preparation. StatSpin MP is the ideal, general purpose centrifuge for the stat, clinic, or office laboratory. Sample preparation is fast, quality serum or plasma in 30-120 seconds, in which clinical decisions can be made quickly. The small sample volume requirements make it ideal for finger stick procedures, thus reducing labor and expense for in venous blood collection. It can also process venous blood samples up to 3mL.



FEATURES

<p>Fast and Efficient:</p> <ul style="list-style-type: none"> • All samples prepared in 2 minutes or less • Whisper quiet, barely audible at 55 dB • Many applications in one centrifuge 	<p>Meets Safety Standards:</p> <ul style="list-style-type: none"> • Interlocking lid prevents access while in cycle • Designed to meet international safety standards • Chamber gasket minimizes aerosols • UL Listed, EMC CE Marked
<p>Easy to use:</p> <ul style="list-style-type: none"> • Rotors load with simple push-on/pull-off, and no tools required • Membrane touch panel • No setting to remember or calculations to make • Light indicates cycle in process, cover releases when cycle ends 	

Application	Sample Volume Required	Speed/Force	Cycle Time (seconds)
Chemistry			
Plasma (routine chemistry)	0.1 to 3.0mL	20,000rpm/11,200xG	30
HDL precipitation	0.05 or 0.5mL	15,800rpm/12,000xG	95
Clear Lipemic Samples	0.5 or 1.5mL	15,800rpm/12,000xG	95
Urine (toxicology)	1.5mL	15,800rpm/12,000xG	45
Hematology			
Platelet-poor plasma for coagulation	0.5 to 3.0mL	20,000rpm/11,200xG	120
Spun hematocrit	9µL	15,800rpm/12,000xG	120
Urinalysis			
Urine Sediment	1.5mL	9800rpm/3900xG	45




Microtube Rotor



Microhematocrit Rotor



Hematocrit Reader

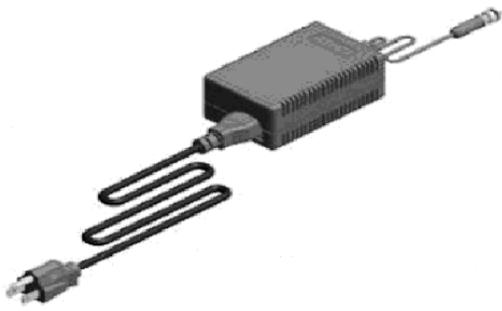


**Switching Power Supply
Part # 01-3553-001**



Plasma Rotor



**Microhematocrit Tubes
Vial of HCT Tubes**

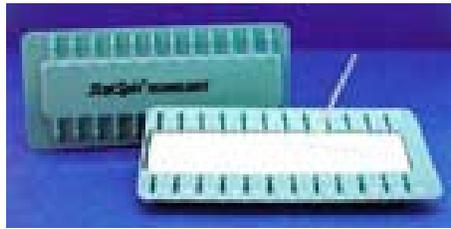

Sealant Pad

CENTRIFUGE LABORATORY MULTIPURPOSE PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height Overall	5.250 inches nominal
	Width Overall	6.630 inches nominal
	Depth Overall	8.750 inches nominal
	Cube	0.176 cu ft
Shipping Weight		9 lbs
Weight		5.5 lbs
Operating Temperature Range		
Storage Temperature Range		
Relative Humidity (in use)		
Relative Humidity (storage)		
Power Requirements		24VDC 1.7A
Watts		

CENTRIFUGE LABORATORY MULTIPURPOSE ACCESSORIES AND CONSUMABLES (START-UP) PACKAGE

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6545015303406		Case, Centrifuge Microscope	DSI-041505-1100LEA	1	EA	\$932.00	\$932.00	GSS	indef	N	3
		Microtube Rotor	22-269258	1	EA	\$92.87	\$92.87	Fisher Scientific	indef	N	3
		Plasma Rotor	May not come with unit	1		\$10.49	\$10.49	Fisher Scientific	indef	N	3
	Included w/NSN	HCT Sealant Pad	22-269247	1	EA	\$4.01	\$4.01	Fisher Scientific	indef	N	3
6640013059170	Included w/NSN	Tube Capillary Microhematocrit	22-269245	1	PG/100	\$10.49	\$10.49	Fisher Scientific	indef	N	3
	Included w/NSN	Microhematocrit Rotor	22-72546	1	EA	\$119.23	\$119.23	Fisher Scientific	indef	N	3
	Included w/NSN	Microhematocrit Reader	NC9370828	1	EA	\$29.00	\$29.00	Fisher Scientific	indef	N	3
		Switching Power Supply	01-3553-001	1	EA	\$150.00	\$150.00	Iris Sample Processing	indef	N	3
		Power Supply Cord	01-2532-001	1	EA				indef	N	3
NO NSN		Manual, Operator		2	EA				indef	N	3
		Service Manual	01-2618-0001	2	EA	\$60.00	\$120	Fisher Scientific	indef	N	3

**CENTRIFUGE LABORATORY MULTIPURPOSE CONSUMABLES
(RESUPPLY)**

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
	HCT Sealant Pad	22-269247	1	EA	\$4.01	\$4.01	Fisher Scientific	indef	N/A	3
6640013059170	Tube Capillary Microhematocrit	22-269245	1	PG/100	\$10.49	\$10.49	Fisher Scientific	indef	N/A	3

CENTRIFUGE LABORATORY F/MICRO HEMATOCRIT W/CASE TOC

Distributed by: GOVERNMENT SCIENTIFIC SOURCE INC.

Manufactured by: BECTON DICKSON ACUTE CARE

MODEL # BDM420200PACHAGEE

Distributor's Phone: (703) 734-1805 FAX: (703) 734-1803

Manufacturer's Phone: (703) 734-1805 FAX: (410) 527-0244

Website: <http://catalog.bd.com/bdCat/search.doCustomer?searchText=420200&typeOfSearch=0&viewPageNum=0&sortByField=Category&x=33&y=13>

AAC "L" ITEM NSN 6640-01-531-1373

UA's: 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$4,050.00

System Description: The Centrifuge is use for direct reading Micro Hematocrit determinations. It separates the plasma/serum from the blood collection tubes and urine sedimentation.

Maximum capacity:

Blood mode - eight 16 x 127 mm tubes

Urine mode - eight 17 x 120 mm tubes

MCHT mode - twelve 75 mm pre-calibrated capillary tubes

Fixed speed: Blood mode - 3,500 RPM

Urine mode - 2,300 RPM

MCHT mode - 10,400 nominal; 9,500 minimum

RCF: Blood mode - 1,500 x g

Urine mode - 660 x g

MCHT mode - 12,600 nominal; 10,500 minimum



Centrifuge

**CENTRIFUGE MICRO-HEMATOCRIT
PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS**

Dimensions	Height	14 inches
	Width	10 inches
	Depth	12.5 inches
	Cube	0.074 cu ft
Weight		24 lbs
Operating Temperature Range		41° F to 104° F
Storage Temperature Range		41° F to 104° F
Relative Humidity (in use)		20 to 90° non condensing
Relative Humidity (storage)		20 to 90° non condensing
Power Requirements		115 volts, 60 Hz, 15 amps
Watts		1725 watts

**CENTRIFUGE MICRO-HEMATOCRIT
CONSUMABLES (START-UP) PACKAGE**

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
NO NSN	Operator Manual	421266	2	EA	Free	Free	GSS	N/A	N	3
6545015303406	Case, Centrifuge Microscope	DSI-041505-1100LEA	1	EA	\$932.00	\$932.00	GSS	N/A	N	3

CHEMISTRY ANALYZER FIELD DEPLOYMENT PACKAGE **TOC**

ABAXIS INC

MODEL # 100-1511

Manufacturer's Phone: (510) 675-6507 FAX: (510) 441-6150

Website: <http://www.abaxis.com>

AAC "J" ITEM NSN 6630-01-497-7291

UA's: N303, N503, N703, F303, 4905, 9305

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$13,891.74

System Description: Clinical chemistry analyzer designed for near-patient testing. Performs blood tests on whole blood samples with results achieved within minutes. Automatically performs more than 100 quality control checks per sample including a daily dual-level QC check and self-calibration with each run. The entirely automated procedure, from separating the blood to analyzing the sample and printing results, takes less than 15 minutes. A single-use plastic disc contains all the reagents and diluents necessary to perform a panel of up to 12 individual tests on just one sample (100 microliters) of whole blood, serum, or plasma.

Predeployment Training: Training will be conducted via manufacturer provided CD ROM. No additional cost for training.

Tests performed:

- 1) AMY - Amylase
- 2) TBIL - Total Bilirubin
- 3) BUN - Blood Urea Nitrogen
- 4) CRE - Creatinine
- 5) GLU - Glucose
- 6) TP - Total Protein
- 7) AST (SGOT) - Aspartate Aminotransferase
- 8) ALT (SGPT) - Alanine Aminotransferase
- 9) ALP - Alkaline Phosphatase
- 10) CA - Calcium
- 11) ALB - Albumin
- 12) GGT - Gamma Glutamyl Transferase
- 13) UA - Uric Acid

Upgrade Advantages

- 1) Point-of-use capability.
- 2) Self calibration.
- 3) Quicker initial calibration.
- 4) Significant maintenance reduction (only requires filter change).
- 5) Piccolo - 17 lbs).
- 6) Optional battery backup (12 VDC).
- 7) Disk of panels vs. individual slides.



PICCOLO

PICCOLO PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height	9.5 inches
	Width	6 inches
	Depth	11.5 inches
	Cube	.97 cu ft
Weight Analyzer	Free Standing	15 lbs
Operating Temperature Range		59° F to 90° F
Storage Temperature Range		50°F to 140 °F
Relative Humidity (in use)		0 to 95%, noncondensing
Relative Humidity (storage)		0 to 95%, noncondensing
Power Requirements		100/250 volts AC; 50-60 Hz; 0.4 amps at 100 volts, 0.165 amps at 250 volts or 12/15 volts DC. 0.6 amps average at 5 watts
Watts		100 volts, 40 watts, 250 volts, 41.25 watts, 12/15 volts DC/5 watts

**CHEMISTRY ANALYZER FIELD DEPLOYMENT PACKAGE
ACCESSORIES AND CONSUMABLES
(START-UP) PACKAGE**

NSN	Notes	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6630014976730	Included with NSN	Case Carrying Analyzer	100-1512	1	EA	\$425.00	\$425.00	Abaxix Inc.	Infef.	N	3
NO NSN	Included with NSN	Training DVD	100-5016	1	EA	Free	Free	Abaxix Inc	Infef.	N	3
NO NSN	Included with NSN	TRB3 Troubleshooting Sftwr. CD	100-5085	1	EA	Free	Free	Abaxix Inc	Infef.	N	3
	Included with NSN	Piccolo Manual	100-7103	1	EA	\$63.00	\$63.00	Abaxix Inc	Infef.	N	3
NO NSN	Included with the manual	Piccolo Easy-Start Guide	400-7138	1	EA	Free	Free	Abaxix Inc	Infef.	N	3
6630014977281	Included with NSN	Uninterruptible Power Supply	988-0009	1	EA	\$148.50	\$148.50	Abaxix Inc	Infef.	N	3
	All items listed below are in the Field Accessory kit	Field Deployment Accessory Kit	100-1507	1	EA	\$48.55	\$48.55	Abaxix Inc	Infef.	N	3
6630015433469	Included with NSN	Storage Bin	100-1509	1	EA	\$5.50	\$5.50	Abaxix, Inc	Infef.	N	3
	Included with NSN	Ziploc bags	100-9002	1	EA	\$2.50	\$2.50	Abaxix, Inc.	Infef.	N	3
6630014916707	Included with NSN	Result Cards	400-7000	2	PG/12	\$5.40	\$5.40	Abaxix Inc	Infef.	N	3
	Included with NSN	Lithium Heparin Microtainer tubes	500-9003	10	EA	\$37.25	\$37.25	Abaxix, Inc	Infef.	N	3
6640014980685	Included with NSN	Pipet Micro Plastic	500-9006	1	EA	\$13.45	\$13.45	Abaxix Inc	Infef.	N	3
	Included with NSN	Tip Pipet Plastic	500-9007	1	PG/96	\$4.45	\$4.45	Abaxix Inc	Infef.	N	3
6515014994162	Included with NSN	Screwdriver	500-9008	1	EA	\$1.75	\$1.75	Abaxix Inc	Infef.	N	3
6630014976652	Included with NSN	Operator's Manual	100-7075	1	EA	\$70.00	\$70.00	Abaxix Inc.	N/A	N	2
6630014976654	Included with NSN	Power Cord	981-0090	1	EA	\$8.75	\$8.75	Abaxix Inc.	N/A	N	2
6130014570955	Included with NSN	Power Supply	988-0008	1	EA	\$87.50	\$87.50	Abaxix Inc.	N/A	N	2

**ITEMS FOUND IN THE UNIT ASSEMBLAGE SUPPORTING
THE CHEMISTRY ANALYZER FIELD DEPLOYMENT PACKAGE**

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Time, we
6550015210911	IN THE UA PUSH PACKAGE	CONTROL SET BLD CHEM	100-9004-4	1	EA	\$40.00	\$40.00	Abaxix Inc	Infef	Y	3
6550015281992	IN THE UA PUSH PACKAGE	TEST DISC GEN CHEM10S	400-0029	2	PG	\$140.00	\$280.00	Abaxix Inc	9 mo.	Y	3

**CHEMISTRY ANALYZER FIELD DEPLOYMENT PACKAGE
CONSUMABLES (RESUPPLY) PACKAGE**

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6630014916707	RESULT CARDS	400-7000	4	PG/12	\$6.00	\$24.00	Abaxis Inc.	I Indef.	N	3
6640014980698	TIP PIPETTE PLASTIC DISPOSABLE	500-9007	1	PG/96	\$4.95	\$4.95	Abaxis Inc.	Indef.	N	3
6640014980685	Pipet Micro Plastic	500-9006	1	EA	\$13.45	\$13.45	Abaxis Inc	Indef.	N	3
6550015210911	CONTROL SET BLD CHEM	100-9004-4	1	EA	\$40.00	\$40.00	Abaxix Inc	Indef.	Y	3
6550015281992	TEST DISC GEN CHEM10S	400-0029	2	PG	\$140.00	\$280.00	Abaxix Inc	9 mo	Y	3
	Ziploc bags	100-9002	1	EA	\$2.50	\$2.50	Abaxis, Inc.	Indef.	N	3

**CHEMISTRY ANALYZER FIELD DEPLOYMENT PACKAGE
ACCESSORIES (RESUPPLY) PACKAGE**

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6630-01-497-6652	Operator's Manual	100-7075	1	EA	\$70.00	\$70.00	Abaxis Inc.	N/A	N	2
6630-01-497-6654	Power Cord	981-0090	1	EA	\$8.75	\$8.75	Abaxis Inc.	N/A	N	2
6130-01-457-0955	Power Supply	988-0008	1	EA	\$87.50	\$87.50	Abaxis Inc.	N/A	N	2

CLEANER VACUUM ELECTRIC VERTICAL TANK TOC

MINUTEMAN INTERNATIONAL INC.

MODEL # L0-065

Manufacturer's Phone: (630) 627-6900 FAX: (630) 627-1130

Website: <http://www.minutemanintl.com>

AAC "W" ITEM NSN 7910-01-177-0622

AAC "J" ITEM NSN 7910-01-327-0757

UA's: M301, M309, M311, 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316


UNIT PRICE: \$ 1,640.47

System Description: For use in the Operating Room; portable; infectious waste; lightweight with all the necessary components. Storage and Transit Conditions range in temperature from -80 degrees F to 155 degrees F. and air pressure up to 2.47 PSI; electric comp treatment for fungus resistance; for use in removing water or fluid material from floors; will also pick up small solids or mud; brand specific end item.



CHARACTERISTICS

Dimensions	Height	38"
	Width	24"
	Length	26"
Weight		86 lbs
Cubic Ft		13.72
Operating Temperature		-80 deg F to 155F
Operating Humidity		2.47 psi
Storage Temperature		-80 deg F to 155F
Storage Humidity		2.47 psi
Power Requirements		120/130V 50 HZ 900W AC

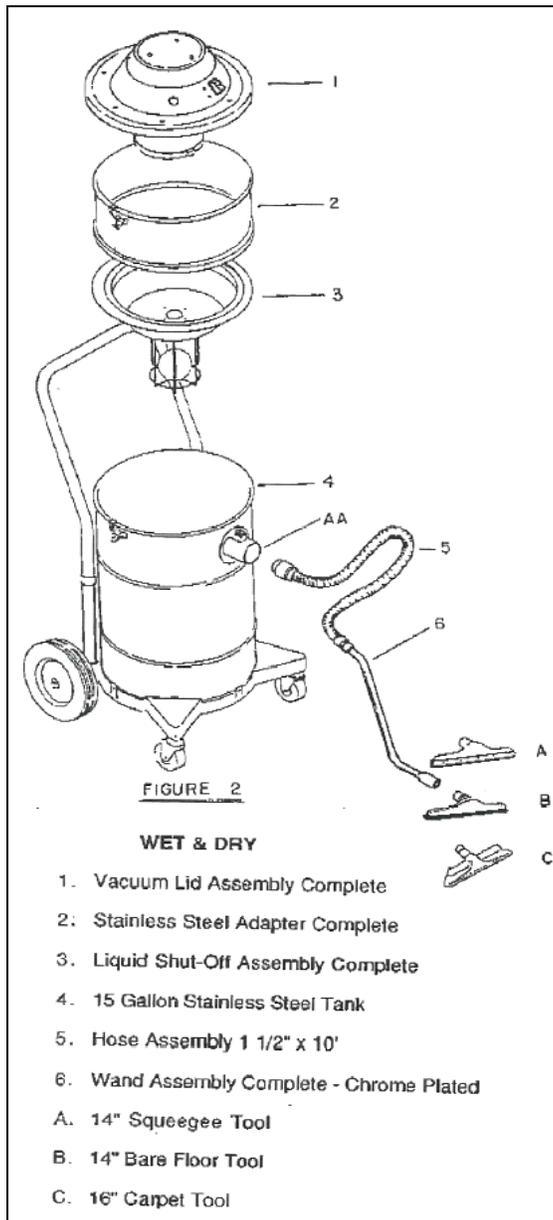

CLEANER VACUUM ELECRCIC TANK ACCESSORIES

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONU S Ship Time, weeks
4470014961503	Filter, Hepa Hygenic	110010	1	EA	\$435.24	\$435.24	MINUTEMAN INTL INC	N	N	2
7910015280008	Adapter, Vacuum	750081-1	1	EA	\$62.87	\$62.87	MINUTEMAN INTL INC	N	N	2
7910015280264	Brush, (Bare Floor Tool)	800603	1	EA	\$29.62	\$29.62	MINUTEMAN INTL INC	N	N	2
7910015280253	Handle, Floor (Wand Assembly)	290000	1	EA	\$24.78	\$24.78	MINUTEMAN INTL INC	N	N	2
7910015280256	Hose, Vacuum Cleaner (1 1/2" X 10')	800317	1	EA	\$47.15	\$47.15	MINUTEMAN INTL INC	N	N	2
7920015310978	Squeegee (14")	800605	1	EA	\$25.99	\$25.99	MINUTEMAN INTL INC	N	N	2
7910015280260	Vacuum, (16" Carpet & Rug Tool)	807237	1	EA	\$18.74	\$18.74	MINUTEMAN INTL INC	N	N	2

CLIPPER KIT,ANIMAL TOC

Distributed by: EXPRESS SHARPENING

Manufactured by: KIM LAUBE

MODEL # 50110101

Distributor's Phone: (570) 384-5555 FAX: (570) 384-4833

Manufacturer's Phone: (856) 262-3322 FAX: (856) 262-7766

Website: <http://www.expresssharpening.com>

Website::<http://www.kimlaubecoshop.com/index.asp?PageAction=VIEWPROD&ProdID=18>

AAC "L" ITEM NSN 3770-01-529-6860

UA's: 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$520.00

System Description: The Laube Lazor 505 Cordless 2 Speed Dog Clipper with Super Battery Pack is lightweight, easy to handle, it comes with a patented ergonomically designed and smooth body with a quick-change cord/cordless feature. Patented lever will not jam. Includes storage case, 1 extra lever, 1 quick charger, number 10 size blade, and extra lever, quick-change cord pack and grease pack. The speed is from 2000 to 5000 RPM and the clip time 1½ to 3 hours on low speed. It fits all snap on style blades. This item does not come with a case. The Model: 505 Motor: Hardened Ball Bearing Strokes Per Minute: 4,000 to 10,000 Clip Time: 1-1/2 to 3 hours Weighs: 24 oz. Length: 7"L

THE CASE IS NOT INCLUDED



Lazor #505 Cordless



Clipper Kit Animal

THE CASE IS NOT INCLUDED

CLIPPER KIT, ANIMAL PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height	9.5 inches
	Width	6 inches
	Depth	11.5 inches
Weight of Clipper Kit		30 lbs
Weight of Clipper		2 lbs
Operating Temperature Range		59° F to 90° F
Storage Temperature Range		50°F to 140 °F
Relative Humidity (in use)		0 to 95%, noncondensing
Relative Humidity (storage)		0 to 95%,noncondensing
Quick Charge		120volt – 240 volt

CLIPPER KIT, ANIMAL CONSUMABLES (START-UP) PACKAGE

NSN	Notes	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
3770015403076	Included W/NSN IN THE UA	Charger	50263101	1	EA	\$121.95	\$121.95	Express Sharpening	N/A	N	3
3770015341834	Included W/NSN IN THE UA	Batteries, Rechargeable	50261001	2	EA	\$126.00	\$252.00	DLA	N/A	N	3
3770014842039	IN THE UA	Blade #10, Clipper, Animal	521401	6	EA	\$24.93	\$149.58	J.A. Webster	N/A	N	3
3770014842040	IN THE UA	Blade #40, Clipper, Animal	521708	6	EA	\$24.93	\$149.58	J.A. Webster	NA	N	3
3770015379972	IN THE UA	Clipper Cordpack kit	191217	1	EA	\$149.99	\$149.99	Dogs Outfitter	N/A	N/A	3

PORTABLE COMPUTED RADIOGRAPHY (CR) SYSTEM TOC

SOURCEONE HEALTHCARE TECHNOLOGIES

OREX PcCR-1417 TABLETOP CR SYSTEM

MODEL # 409073V

Manufacturer's Phone: (215) 637-9170 FAX: (440) 701-1376

Website: <http://www.orex-cr.com>

AAC "W" ITEM NSN 6525-01-500-6537

AAC "J" ITEM NSN 6525-01-504-5002

UA N334, 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$93,032.00

System Description: This is a portable or tabletop computed radiography system for lower-volume imaging environments. Images are acquired in less than a minute with no film, no chemicals, and no disposal (environmental) issues.

Pre-deployment Training: Hands-on training is required. Training concept is to provide equipment and "train the trainer" training to RTS-MED Site(s) to support training requirements for deploying AC and RC units. No additional cost for training.



Upgrade Advantages

- Virtual elimination of the need for re-takes.
- Elimination of lost images.
- Simplification in the filing of images.
- Electronic transmission of digital images for consultation.
- Eliminates the need for processing chemicals and film.
- Faster processing time. Digital images are acquired in less than one minute.
- Reduces transportation weight.
- Eliminates the need for the disposal of caustic chemicals.




**AC ADAPTER
MODEL CF-AA1623AM**

**TOUGHBOOK, 28 PENTIUM LAPTOP,
384 MB INTERNAL, NSN 6525-01-513-7141
WITH AC ADAPTER (3 PIN),
MODEL CF-AA1623AM**

X-RAY PLATE SIZES

1) 10 in X 12 in


2) 14 in X 17 in

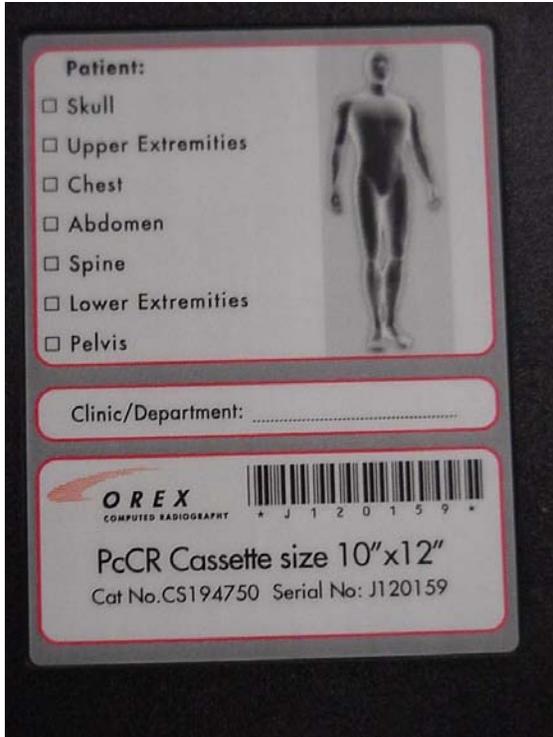

**CR 10" X 12" PLATE & CASSETTE
NSN 6525-01-509-4838**



**CR 14" X 17" PLATE & CASSETTE
NSN 6525-01-509-4826**

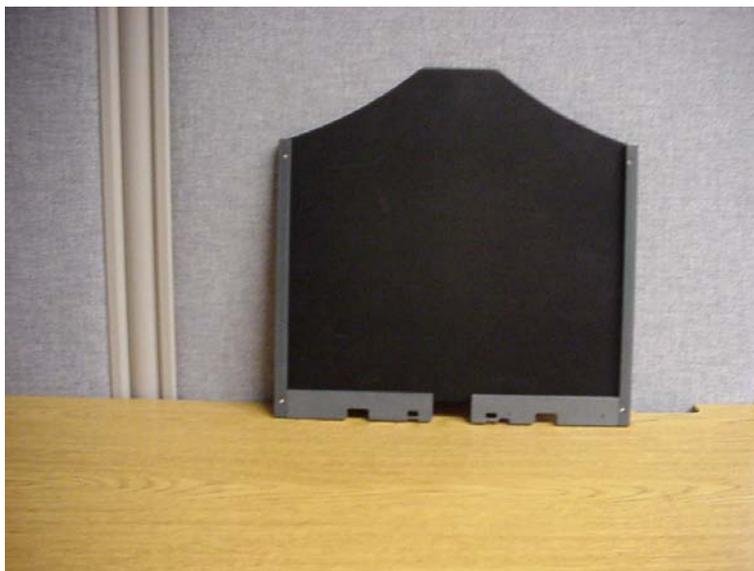

CASSETTE HOLDER



OREX PcCR-1417
NSN 6525-01-504-5002

OREX PcCR-1417 PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

CR Case Dimensions	Height	13 inches	
	Width	29 inches	
	Depth	26 inches	
	Weight	100 lbs	
	Cube	5.672	
Toughbook Case Dimensions	Height	16 inches	
	Width	25 inches	
	Depth	19 inches	
	Weight	50 lbs	
	Cube	7.6	
Mil Cassette Case Dimensions	Height	25 inches	
	Width	22 inches	
	Depth	25 inches	
	Weight	150 lbs	
	Cube	13.75	
AC/DC Power Converter	Input	100V – 240V	1.2 Amps/.6A – 50-60Hz
	Output		15.6V DC – 5 Amps
Power Requirements		110 – 120 volts 50-60Hz	15 Amps, 1650 Watts
Operating Temperature		100 °	
Storage Temperature		145 °	
Humidity		100 %	

HARDIGG CASES ONLY



**COMPUTER SOFTWARE IS REQUIRED FOR OPERATION OF
THE CR SYSTEM
(SOFTWARE COMES WITH THE EQUIPMENT)**

CR SYSTEM ACCESSORIES/CONSUMABLES (START-UP)

NSN	Notes	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refr Y/N	CONUS Ship Time, weeks
6525-01-533-1454	Included W/NSN	Orex CR Image Standard Laser Reader	409673G	1	EA	\$45,250.00	\$45,250.00	Sourceone Healthcare	indef	N	2
6525-01-513-7141	Included W/NSN	Toughbook 28 Pentium Laptop, 384 MB Internal	409093	2	EA	\$5,437.50	\$10,875.00	Sourceone Healthcare	indef	N	2
6525-01-509-4826	Included W/NSN	Orex CR 14 X 17 Plate and Cassette	409079	4	EA	\$1,290.00	\$5,160.00	Sourceone Healthcare	indef	N	2
6525-01-509-4838	Included W/NSN	Orex CR 10 X 12 Plate and Cassette	409080	4	EA	\$1,080.00	\$4,320.00	Sourceone Healthcare	indef	N	2
6525-01-513-4674	Included W/NSN	Orex Military Hardigg Transport Case for UPS & Computers	409096A	1	EA	\$825.00	\$825.00	Sourceone Healthcare	indef	N	2
6525-01-509-4856	Included W/NSN	Orex Military Hardigg PcCR1417 Case	409095	1	EA	\$1,392.00	\$1,392.00	Sourceone Healthcare	indef	N	2
6525-01-513-4672	Included W/NSN	Orex Military Hardigg Cassette Case	409096	1	EA	\$853.00	\$853.00	Sourceone Healthcare	indef	N	2
6525-01-513-4555	Included W/NSN	650mb Medical Grade CD-R in Jewel Bx	406179	20	10/bx	\$27.50	\$550.00	Sourceone Healthcare	indef	N	2
6525-01-516-3259	Included W/NSN	CD File, Write-on CD Bag w/Hangar 20 per pack	S714403	10	20/pz	\$10.40	\$104.00	Sourceone Healthcare	indef	N	2
6525-01-533-2165	Included W/NSN	AC Adapter (3 pin)	CF-AA1623AM	1	EA	\$55.00	\$55.00	Sourceone Healthcare	indef	N	2
6130-01-533-3296	Included W/NSN	Battery Charger	CF-VCBTB1U	1	EA	\$199.00	\$199.00	Sourceone Healthcare	indef	N	2
6525-01-533-2160	Included W/NSN	Lithium Ion Battery Pack	CF-VZSU30U	1	EA	\$375.00	\$375.00	Sourceone Healthcare	indef	N	2
6525-01-533-1103	Included W/NSN	Grid, Radiographic 14 X 17	L1467840/P2D	1	EA	\$839.46	\$839.46	Sourceone Healthcare	indef	N	2
6525-01-533-1106	Included W/NSN	Grid, Radiographic 10 X 12	L1067840/P2D	1	EA	\$501.84	\$501.84	Sourceone Healthcare	indef	N	2

CR SYSTEM CONSUMABLES (RESUPPLY)

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refr Y/N	CONUS Ship Time, weeks
6525-01-513-4555	650mb Medical Grade CD-R in Jewel Bx	406179	20	10/bx	\$27.50	\$550.00	Sourceone Healthcare	indef	N	2
6525-01-516-3259	CD File, Write-on CD Bag w/Hangar 20 per pack	S714403	10	20/pz	\$10.40	\$104.00	Sourceone Healthcare	indef	N	2
6525-01-533-2165	AC Adapter (3 pin)	CF-AA1623AM	1	EA	\$55.00	\$55.00	Sourceone Healthcare	indef	N	2
6130-01-533-3296	Battery Charger	CF-VCBTB1U	1	EA	\$199.00	\$199.00	Sourceone Healthcare	indef	N	2
6525-01-533-2160	Lithium Ion Battery Pack	CF-VZSU30U	1	EA	\$375.00	\$375.00	Sourceone Healthcare	indef	N	2

CONCENTRATOR OXYGEN 1-5 LPM TOC

AIRSEP NEWLIFE ELITE

MODEL # ELITE AS5002

Manufacturer's Phone: (716) 691-0202 FAX: (716) 691 0174

Website: <http://www.airsep.com>

AAC "W" ITEM NSN 6515-01-383-1052

AAC "J" ITEM NSN 6515-01-434-4629

UA's: 4901, 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$926.08

System Description: Performance: 1–3 lpm: 95.5%–92.0%; 4 lpm: 92% \pm 3%; 5 lpm: 90% \pm 3%. This system has built-in alarms for power failure and high/low pressure. Includes filters to remove dust, bacteria and other particulates, provides for the attachment of an in-line humidifier to humidify. The gas mixture delivered to the patient for use in producing oxygen rich gas mixture by drawing in room air and extracting the oxygen. This is a large, easy-to-read flow meter with back-lines for accurate flow settings. The built-in handles make it easy to move or lift. The large casters glide easily over virtually any flooring surface.



Concentrator Oxygen 1-5 LPM

AIRSEP OXYGEN CONCENTRATOR CHARACTERISTICS

Dimensions	Height, in.	27.5
	Width, in.	16.7
	Depth, in.	14.5
Weight, lbs.	54	
Cube	3.85 cu ft	
Power Consumption	480 Watts	
Power Requirements	120 VAC, 60 Hz, 4 amps	
Operating Temperature Range	40° to 105 ° F	
Relative Humidity (storage)	4° to 140° F	
Relative Humidity (in use)	0 to 95%	
Alarms	Power failure, High and low pressure Temperature, Battery test Low purity (Oxygen monitor with optional EcoCheck)	

AIRSEP OXYGEN CONCENTRATOR CONSUMABLES (START-UP & RESUPPLY)

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6515011535584	Included W/NSN	Mask, oro-nasal, child	1042	1	50 PG	\$100.23	\$100.23	Medline Industries	Indef	N	2
6515013656206	Included W/NSN	Mask, oro-nasal, pediatric	1011	1	50 PG	\$109.72	\$109.72	Elite Medical Products	Indef	N	2
6515011405343	Included W/NSN	Mask, rebreathing, adult	1009	1	50 PG	\$93.25	\$93.25	Metropolitan Medical	Indef	N	2
6515014580522	Included W/NSN	Nasal Cannula, Oxygen, 84inch non-flared	1103	1	50 PG	\$28.50	\$28.50	Hudson Oxygen Therapy Sales	Indef	N	2
6515014724663	Included W/NSN	Filter Bacteria	F1001-1	1	EA	\$4.20	\$4.20	Airsep Corp	Indef	N	2
7610015379355	Included W/NSN	Operating/Service Manual	MN105-1	1	EA	\$11.00	\$11.00	Airsep Corp	Indef	N	2

CONTAINER TRANSPORT THERMAL TOC

MINNESOTA THERMAL SCIENCE LL

MODEL # GH-WA-MTS-4U

Manufacturer's Phone: (952) 884-3629 FAX: (763) 412-4801

Website: <http://www.mnthermalscience.com>

AAC "L" ITEM NSN 6530-01-505-5301

UA's: 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$2,971.25

System Description: The thermal container is use to storage and transport of blood, pharmaceuticals, reagents, vaccines in the field. Maintains temperature range between 1 to 10 degrees Celsius for 48 plus hours in any environment. It can maintain 5 degree centigrade temperature for 96 hours. It requires no ice because of the combined performance of the Vacuum Insulated Panel (VIP) and the Thermal Isolation Chamber (TIC™). It includes the canvas cover with strap.

Features:

- Transports and stores up to 4 units of red blood cells (RBCs).
- Maintains RBCs at required temperature of between 1° and 10°C for up to 60 hours, even in harsh environments.
- Requires no ice because of the combined performance of the Vacuum Insulated Panel (VIP) and the Thermal Isolation Chamber (TIC™).
- Weighs approximately 7 pounds, is highly portable and is reusable.
- Payload dimensions: 6.0" x 5.0" x 4.25" "
- Outside dimensions: 8.8" x 7.8" x 7.2"
- Additional applications include transport and/or storage of vaccines, other biologics, organs, reagents, and any other temperature-sensitive materials or products.



Container Transport Thermal
MODEL # GH-WA-MTS-4U

CHARACTERISTICS

Payload Dimensions	Height, in.	6.0"
	Width, in.	5.0"
	Depth, in.	4.25"
Outside Dimensions	Height, in.	8.8"
	Width, in.	7.8"
	Depth, in.	7.2"
Weight, lbs.	7	
Cube	3.85 cu ft	
Maintains Temperature	1° to 10° C for up to 60 hours in harsh environments	

CUTTER ORTHOPEDIC CAST STRYKER TOC

Distributed by: BUFFALO SUPPLY
Manufactured by: STRYKER CORPORATION
MODEL # 840
Distributor's Phone: (303) 666-6333 FAX: (303) 666-8518
Manufacturer's Phone: (269) 323-7700 FAX: (269) 323-3491
Website: <http://www.stryker.com>

AAC "J" ITEM NSN 6515-00-323-4510

UA's: 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$834.00

System Description: This is a heavy duty cast cutter orthopedic. It comes with one 2½ diameter blade and one wrench. **THE CASE IS NOT INCLUDED.**



THE CASE IS NOT INCLUDED.

CUTTER ORTHOPEDIC CAST STRYKER PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Length	10.5 inches
	Diameter	2.75 inches
	Depth	11.5 inches
	Cube	.5 cu ft
Weight w/case	Free Standing	7 lbs
Operating Temperature Range		59° F to 90° F
Storage Temperature Range		50°F to 140 °F
Relative Humidity (in use)		0 to 95%, noncondensing
Relative Humidity (storage)		0 to 95%, noncondensing
Power Requirements		120 volts; 60 Hz, 2.0A 1/5 HP
Watts		1400 or 250 watts

CUTTER ORTHOPEDIC CAST STRYKER CONSUMABLES START-UP PACKAGE

NSN	Notes	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6515003234520	Included W/NSN	2½ Blade	840-25-100	1	EA	\$22.93	\$22.93	Stryker Corp.	18	Y	
6515015421750	Included W/NSN	Wrench	057-001-000	1	EA	\$15.00	\$15.00	Stryker Corp.	Indef	N	

DIAGNOSTIC KIT OPHTHALMOSCOPE AND OTOSCOPE TOC

WELCH ALLYN INCORPORATED

MODEL # MIL 6271-V

Manufacturer's Phone: (503) 530-7856 FAX: (301) 865-2772


Website: <http://www.welchallyn.com>

AAC "L" ITEM NSN 6515-01-529-8155

UA's: 1905, 3905, 4905, 4912

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$652.00



AWAITING PICTURE FROM MANUFACTURER

**DIAGNOSTIC KIT OPHTHALMOSCOPE AND OTOSCOPE
PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS**

Dimensions	Height	9.5 inches
	Width	6 inches
	Depth	11.5 inches
	Cube	.97 cu ft
Weight Analyzer	Free Standing	15 lbs
Operating Temperature Range		59° F to 90° F
Storage Temperature Range		50°F to 140 °F
Relative Humidity (in use)		0 to 95%,noncondensing
Relative Humidity (storage)		0 to 95%, noncondensing
Power Requirements		3.5 Volts Battery
Watts		N/A

Coaxial Ophthalmoscope Features:

The #11720 Ophthalmoscope includes all of the features of the #11710 plus:

- Halogen HPXTM lamp that provides 30% more light output, for true tissue color and consistent, long-lasting illumination
- Coaxial optical system for shadow-free spot and easier entry into undilated pupil
- Crossed linear polarizing filter to reduce corneal reflection
- Red-free filter for use with any aperture
- 18 possible aperture combinations for greater versatility (see below)
- Sealed optics for better dust protection

#11720 3.5 V Coaxial Ophthalmoscope

#04900-U Halogen replacement lamp



Coaxial Ophthalmoscope 11720 Apertures:



Welch Allyn®
3.5v Halogen Lamp
Model 04900-U

An otoscopic examination of the external ear canal should be performed on every physical examination and is a must for patients with an ear disease. The ear canal may be straightened by grabbing the pinna and gently pulling it up and away from the patient. The otoscope can then be inserted into the vertical ear canal. While visualizing the vertical canal, the otoscope can be slowly advanced into the horizontal canal and the tympanic membrane visualized. The otoscope can be rotated so a panoramic view of the ear canal may be seen. Exudate and inflammation can easily be visualized.

Operating Otoscope Features:

- Halogen HPXTM lamp that provides 30% more light output than standard halogen lamps, for true tissue color and consistent, long-lasting illumination
 - Open system for convenience during procedures
 - Rotatable lens and speculum for ease of use 41100
 - Fiber-optic illumination for cool light
- #21760 3.5 V Otoscope, complete with three polypropylene specula, sizes 4, 5, and 7 mm
#21761 same as #21760 without polypropylene specula
#209026-502 Lens and attachable arm
#03100-U Halogen replacement lamp



3.5 V Otoscope Part # 21760



**Welch Allyn®
3.5v Halogen Lamp
Model 03100-U**

3.5 V Finnoff Ocular Transilluminators Features:

- Halogen HPXTM lamp that provides 30% more light output than standard halogen lamps, for true tissue color and consistent, long-lasting illumination
- Fiber-optic light transmission for cool distal light
- Fully sterilizable with steam, water, gas, and solutions
- Optional cobalt blue filter



**Finnoff Ocular
Transilluminator
Part # 41100**



**Welch Allyn®
3.5v Halogen Lamp
Model 03100-U**

**Polypropylene Specula for Veterinary
Pneumatic and Operating Oscopes Features:**

- Material is lightweight, yet very durable
- May be autoclaved, boiled or cleaned with standard germicides

#22160 Set of 3 polypropylene specula:

sizes 4, 5 and 7 mm

#22064 4 mm specula

#22065 5 mm specula

#22067 7 mm specula



**Polypropylene Specula
for Veterinary Oscopes
Part # 22160**

Indirect Viewing Lens Features:

Using any equipment producing a bright spot of light, such as the Welch Allyn #41100 transilluminator (page 16) or a #76600 PenLite (below), the diagnostic procedure is performed at arm's length.

- 20-diopter all-glass indirect convex viewing lens allows for less distortion
- Provides a larger field of view of the fundus than is possible with direct ophthalmoscopy
- Examination at a safe distance from fractious animals

#12300 Veterinary Viewing Lens



**Indirect Viewing Lens
Part # 12300**

Power Handle Features:

- Universal handle- Accepts all Welch Allyn 3.5v instruments heads.
- Well-balanced handle- Rests comfortably in the hand. Weight is evenly distributed end to end.
- Adjusted rheostat control- Free-floating reserve setting allows optimal intensity and battery life.
- Transformer module- Built-in step-down transformer is U.L. recognized.
- Economical- Long-lasting rechargeable nickel-cadmium battery included.
- Sure grip- Smooth, non-abrasive knurled finish insures a no-slip grip.
- Chrome-plated brass handles provide durable, long-life construction.
- Safety switch to prevent accidental draining of battery.
- Metal head connectors for durability.



No. 71000-A 3.5v Power Handle



**72300
BATTERY NUMBER**

DIAGNOSTIC KIT OPHTHALMOSCOPE AND OTOSCOPE CONSUMABLES AND ACCESSORIES (START-UP) PACKAGE

NSN	Notes	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6540012395474	Included W/NSN	Coaxial Ophthalmoscope	11720	1	EA	\$146.16	\$146.16	WELCH ALLYN	N/A	N	3
	Included W/NSN	3.5v Halogen Lamp	04900-U	1	EA	\$18.40	\$18.40	WELCH ALLYN	N/A	N	3
6515015300623	Included W/NSN	3.5 V Otoscope	21760	1	EA	\$244.00	\$244.00	WELCH ALLYN	N/A	N	3
	Included W/NSN	3.5v Halogen Lamp	03100-U	2	EA	\$13.13	\$13.13	WELCH ALLYN	N/A	N	3
6540014618991	Included W/NSN	Finnoff Ocular Transilluminator	41100	1	EA	\$51.14	\$51.14	Krasitys Medical	N/A	N	3
6515015300625	Included W/NSN	Polypropylene Specula Set	22160	1	SE	\$22.00	\$22.00	WELCH ALLYN	N/A	N	3
6515015303627	Included W/NSN	Indirect Viewing Lens	12300	1	EA	\$65.00	\$65.00	Henry Schein	N/A	N	3
6515015300775	Included W/NSN	3.5v Power Handle	71000-A	1	EA	\$200.00	\$200.00	WELCH ALLYN	N/A	N	3
6140015203570	Included W/NSN	Rechargeable Battery	72300	1	EA	\$28.77	\$28.77	WELCH ALLYN	N/A	N	3
6515011443553	IN THE UA	Speculum Otoscope	24304	6	EA	\$4.11	\$24.66	WELCH ALLYN	N/A	N	3
		Case Hardened		1	EA			WELCH ALLYN	N/A	N	3

DIAGNOSTIC KIT OPHTHALMOSCOPE AND OTOSCOPE CONSUMABLES (RESUPPLY)

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
	3.5v Halogen Lamp	04900-U	1	EA	\$18.40	\$18.40	WELCH ALLYN	N/A	N	3
	3.5v Halogen Lamp	03100-U	2	EA	\$13.13	\$13.13	WELCH ALLYN	N/A	N	3
6515015300625	Polypropylene Specula	22160	1	EA	\$22.00	\$22.00	WELCH ALLYN	N/A	N	3
6140015203570	Battery, Rechargeable	72300	1	EA	\$28.77	\$28.77	WELCH ALLYN	N/A	N	3

ELECTROSURGICAL APPARATUS MOBILE TOC

Distributed By: ALLIANCE JOINT VENTURE

Manufactured By: CONMED

MODEL # 888033227

Distributor's Phone: (305) 364-0888 FAX: (305) 364-0877

Manufacturer's Phone: (800) 765-8375 EXT 4447 FAX: (410) 374-2144

Distributor's Website: <http://www.american-depot.com/>

Manufacturer's Website: <http://www.conmed.com/Product.php>

AAC "J" ITEM NSN 6515-01-532-3321

UA's: 5267, N301, 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$9,394.37

System Description: The Excalibur Plus PC[®] is the most powerful Isolated ESU on the market with 10,000V PTP in Spray COAG. It is the only ESU that allows the surgeon to adjust power settings from the surgical field with a standard ES pencil. Excalibur Plus PC Patented Controlled Output Voltage[™] in CUT maintains minimum necessary voltage for smooth cutting through various impedance tissues with minimal thermal damage.

Features: The Excalibur Plus PC[®] offers a scalpel like cut and three blend modes

- Pure Cut Maximum Peak to Peak Voltage is 2000 Volts.
- Blend 1 - Maximum Peak to Peak Voltage is 2000 Volts.
- Blend 2 - Peak voltage of 2200.
- Blend 3 - The Excalibur Plus PC[®] comes equipped with the maximum Peak to Peak Voltage of 2400. Safety: The Aspen Return Monitor (ARM[™]) is the most sensitive pad monitoring system available. It combines automatic feedback circuitry and visual displays to provide the most sensitive contact quality monitoring system available today. ARM[™] This function continuously monitors the safety of the Monitoring patient to ground System pad interface with a dual foil ground pad. Disarms the ESU and alerts the staff if a pad fault condition occurs. ARM Operates in a preset Safety range of 10-150 Ohms. Once the Pad is placed and the resistance is measured this measurement is set. If the patient's impedance level should either increase by 20% or fall out of the preset safety range, ARM[™] will alarm and disarm the ESU. The Assist Bar Graph provides a visual Alarm Set Point and eliminates the possibility of pad site burns attributable to machine error.
- Standard Coagulation: Provides "Pin Point" coagulation with minimal arcing and deep thermal necrosis
- Spray Coagulation: Wide pattern fulguration with maximum arcing and shallow thermal necrosis.

10000 Volts Peak to Peak in Spray Coag: The Highest voltage offered in an isolated ESU that delivers unmatched Spray Coagulation performance. A proprietary feature of Excalibur Plus PC.



**ELECTROSURGICAL APPARATUS
EXCALIBUR PLUS PC NSN 6515-01-532-3321**



**ELECTROSURGICAL APPARATUS
CART PART # 999121185**

ELECTROSURGICAL APPARATUS EXCALIBUR PLUS PC CHARACTERISTICS

Dimensions Excalibur Plus PC	Height, in.	6.25		
	Width, in.	15.9		
	Depth, in.	22.75		
Dimensions ElectroSurgical Cart	Height, in.	34		
	Width, in.	22		
	Depth, in.	25		
Electrosurg Weight, lbs		40lbs 12 oz		
Cart Weight, lbs		56 lbs		
Operating Temperature		50° F to 86° F		
Storage Temperature		40° F to 158° F when sealed in bag		
Relative Humidity Operating		0 to 95% noncondensing		
Relative Humidity in Storage		0 to 95% noncondensing		
Voltage	115/230 VAC 60Hz			
Fuse	8 Amp max			
Watts	960 Watts			
Output Power Monopolar	MAX POWER (WATTS)	MAX VOLTAGE (VOLTS)	PP CREST FACTOR	LOAD Ohms
- Pure Cut	300 Watts	2,000	1.8	300
- Blend 1	180 Watts	2,000	2.4	300
- Blend 2	120 Watts	2,200	3.1	300
- Blend 3	80 Watts	2,400	3.8	300
- Coag Standard	120 Watts	6,500	6.4	300
- Coag Spray	80 Watts	10,000	8.5	500
- Bipolar				
- Cut	50 Watts	400	1.7	50
- Coag	50 Watts	400	1.5 -12.0	50



**Rocker Switch, UltraClean Blade Electrode, 10' (3.05m) Cable, Holster
PART # 999010787**



**Surefit Grounding Pad(for patients > 4.4lbs), without cable, Single use,
PART # 999121138 (use reusable cable PART # 999121545) 5/package**

Today's sophisticated electronics and a polymer gel technology allows us to make a smaller pad. With the same pad used on patients from 4.4 lbs (2.2 kg), the SureFit™ dispersive electrode presents the possibility to replace the traditional infant, pediatric, and adult dispersive electrode with one configuration. The SureFit™ Dispersive Electrode from CONMED provides unique features including a tab designed to help the nurse gently remove the pad from the patient. The pliable backing and polymer hydrogel conform to body contours; while the adhesive borders helps prevent fluid from penetrating the borders of the SureFit dispersive electrode.



**6" UltraClean® Blade; Single-Use; Sterile
PART # 999120860**




**1" UltraClean[®] Needle; Single-Use; Sterile
PART # 999120857**



**Footswitch (full size), Monopolar, Splashproof, with
10' (3.05m) cable. For use with Excalibur
PART # 999121176**



**Footswitch, Bipolar, Splashproof, Omni directional.
For use with System 5000[™], Excalibur series with 10'
(3.05m) pre-attached cable. PART # 999121175**




**1" UltraClean® Blade with Extended
Insulation;
Single use; Sterile . . . PART # . . . 999120858**



**Universal Active Adapter for foot-activated monopolar
accessories; fits Bovie #12 type output sockets
PART # 999120946**



**7-3/4" (19.685cm) Scoville-Greenwood Bayonet (Insulated), 1.5mm Tip .
PART # . . . 999121164**

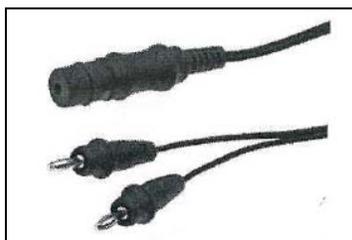

**Reusable Bipolar Cable; for use with Wolf
Kleppinger forceps; twin banana plug machine
connectors; 10 long
Part # 999121052**



All ARM equipped, and Valleylab - All REM equipped; enables pad-to-patient contact quality monitoring
PART # 999121545



ASPENGEL Conductive Gel, Nonstaining,
8.45 fluid oz.
Optional Item PART # 999121151

**EXCALIBUR PLUS PC
ACCESSORIES CONSUMABLES (START-UP)**

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONU S Ship Time, weeks
6515015347437	Included W/ NSN	Universal Cart	999121185	1	EA	\$351.75	\$351.75	Alliance Joint Venture	N/A	N	3
6515015347442	Included W/ NSN	Monopolar Footswitch	999121176	1	EA	\$241.20	\$241.20	Alliance Joint Venture	N/A	N	3
6515015347475	Included W/ NSN	Bipolar Footswitch	999121175	1	EA	\$20.35	\$20.35	Alliance Joint Venture	N/A	N	3
6515015347815	Included W/ NSN	Surefit Grounding pad without cord	999121138	1	EA	\$150.00	\$150.00	Alliance Joint Venture	N/A	N	3
6515015347490	Included W/ NSN	Clamp/cord assembly	999121545	1	EA	\$32.00	\$32.00	Alliance Joint Venture	N/A	N	3
6515015347516	Included W/ NSN	Forcep insulated 7.75" bayonet	999121164	1	EA	\$152.00	\$152.00	Alliance Joint Venture	N/A	N	3
6515015347670	Included W/ NSN	Bipolar forceps cord	999121052	1	EA	\$140.00	\$140.00	Alliance Joint Venture	N/A	N	3
6515013541012	Included W/ NSN	Disposable hand switch pencil w/holster	999010787	1	40/PG	\$246.13	\$246.13	Alliance Joint Venture	N/A	N	3
6515015347821	Included W/ NSN	Extended coated blade	999120860	1	50/PG	\$215.00	\$215.00	Alliance Joint Venture	N/A	N	3
6515015347830	Included W/ NSN	Coated needle electrode	999120857	1	50/PG	\$200.00	\$200.00	Alliance Joint Venture	N/A	N	3
6515015347836	Included W/ NSN	Edge insulated coated blade	999120858	1	50/PG	\$200.00	\$200.00	Alliance Joint Venture	N/A	N	3
6515015347844	Included W/ NSN	Active Adapter	999120946	1	EA	\$49.50	\$49.50	Alliance Joint Venture	N/A	N	3
6515015403422	Included W/ NSN	Service Manual	60-6280-001	1	EA	\$65.00	\$65.00	Conmed	N/A	N	3
6515015403420	Included W/ NSN	Operator Manual	60-6270-001	1	EA	\$65.00	\$65.00	Conmed	N/A	N	3

**EXCALIBUR PLUS PC
ACCESSORIES CONSUMABLES (RESUPPLY)**

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6515015347815	Surefit Grounding pad without cord	999121138	1	EA	\$150.00	\$150.00	Alliance Joint Venture	N/A	N	3
6515015347490	Clamp/cord assembly	999121545	1	EA	\$32.00	\$32.00	Alliance Joint Venture	N/A	N	3
6515015347516	Forcep insulated 7.75" bayonet	999121164	1	EA	\$152.00	\$152.00	Alliance Joint Venture	N/A	N	3
6515015347670	Bipolar forceps cord	999121052	1	EA	\$140.00	\$140.00	Alliance Joint Venture	N/A	N	3
6515013541012	Disposable handswitch pencil w/holster	999010787	1	40/PG	\$246.13	\$246.13	Alliance Joint Venture	N/A	N	3
6515015347821	Extended coated blade	999120860	1	50/PG	\$215.00	\$215.00	Alliance Joint Venture	N/A	N	3
6515015347830	Coated needle electrode	999120857	1	50/PG	\$200.00	\$200.00	Alliance Joint Venture	N/A	N	3
6515015347836	Edge insulated coated blade	999120858	1	50/PG	\$200.00	\$200.00	Alliance Joint Venture	N/A	N	3
6515015347844	Active Adapter	999120946	1	EA	\$49.50	\$49.50	Alliance Joint Venture	N/A	N	3
6515015424886 Optional Item	ASPENGEL Conductive Gel, Nonstaining, 8.45 fluid oz.	999121151	1	24/PG	\$69.77	\$69.77	Alliance Joint Venture	N/A	N	3
6515015403422	Service Manual	60-6280-001	1	EA	\$65.00	\$65.00	Conmed	N/A	N	3
6515015403420	Operator Manual	60-6270-001	1	EA	\$65.00	\$65.00	Conmed	N/A	N	3

FIXATION KIT EXTERNAL VETERINARY TOC

IMEX VETERINARY INC

MODEL # 500.SKT

Manufacturer's Phone: (903) 295-2196 FAX: (903) 295-0730

Website: http://www.imexvet.com/sk/sk_large_starter.htm

AAC "L" ITEM NSN 6515-01-540-0369

UA's: 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316


UNIT PRICE: \$908.72

System Description: This is a 53 piece kit that allows management of any long bone fracture. It have 10 small SK single clamps, two small SK double clamps, one small 9.5mm x 50mm carbon fiber rod, two 9.5mm x 100mm carbon fiber rod, two 9.5mm x 150mm carbon fiber rod, two 9.5mm x 200mm carbon fiber rod ; 9.5mm x 250mm carbon fiber rod, and two 9.5mm x 300mm carbon fiber rod. It is designed exclusively for veterinary use.


This is one time usage kit! Replaceable items are not available without purchasing full kit.

SK™ ESF Basic Application Steps

1. Application of the SK™ fixator begins with placement of a single pin into the major proximal fragment and a single pin into the major distal fragment. Traditionally, these first pins have been the most proximal and distal pins of the frame, but location can be varied. A connecting rod is secured to the first two pins using SK™ single clamps. Empty clamps to accommodate the anticipated number of additional fixation pins can be pre-placed onto the rod or added later.
2. A release incision at least 1cm in length is made at each pin placement site. An empty clamp is positioned over the pin placement site. After correct orientation of the clamp is achieved, it is maintained by tightening the secondary clamp bolt. A drill sleeve is placed through the pin-gripping bolt of the clamp and gently tightened (do not crush hollow sleeve) to protect the soft tissues as the bone is pre-drilled in preparation for pin placement. The sleeve is removed and the fixation pin is applied through the primary clamp bolt using a Jacobs hand chuck or low RPM power insertion technique.

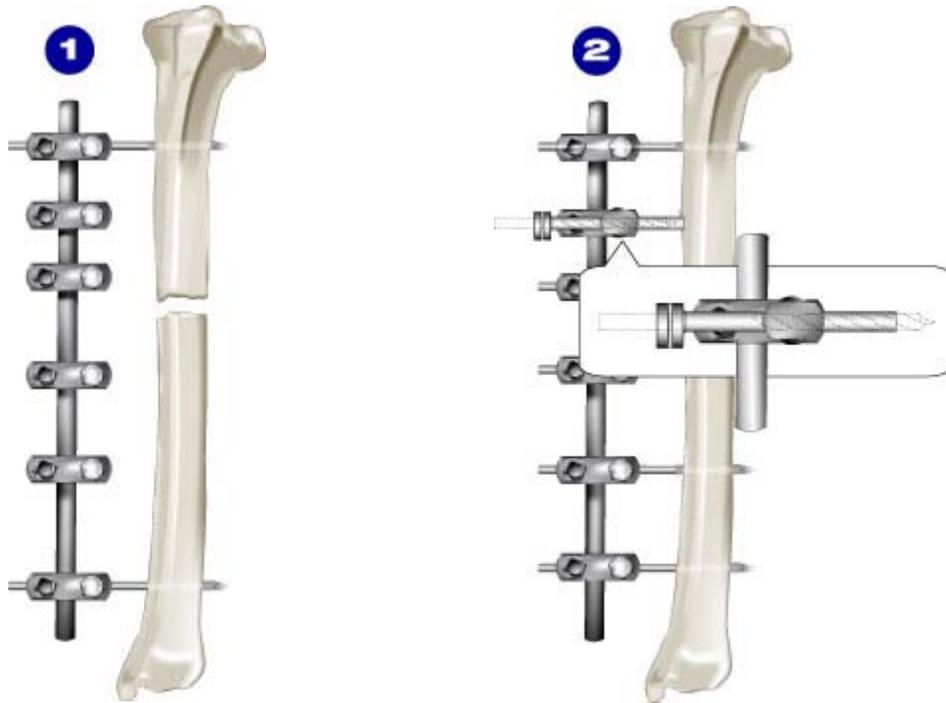

3. Fixation clamps are secured by alternate tightening of the secondary bolt and the nut on the primary bolt. Tightening torque has the potential to cause loss of fracture reduction or alignment. This potentially disruptive force can be neutralized during clamp tightening with use of the “two-wrench technique.” An open-end wrench placed on the flat surfaces of the head of the primary bolt (figure 3), or on the flats of the clamp body (figure 3 - inset), is used to neutralize torque force while a second wrench is used to tighten the clamp. Alignment should be re-checked with each pin application, and all clamps should be re-checked for tightness at completion of surgery.

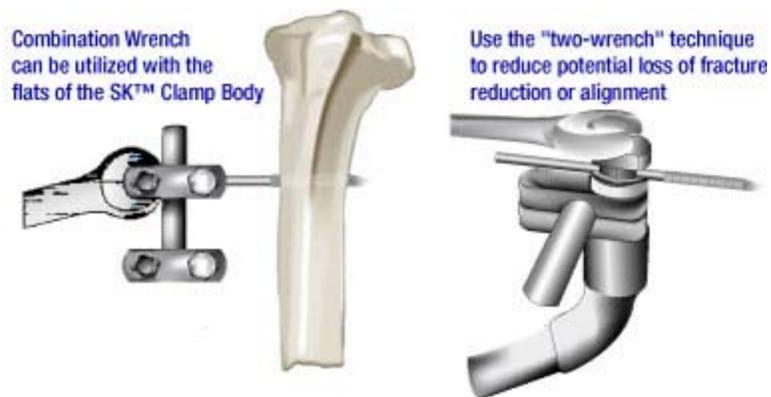

Large SK™ ESF Components

Large SK™ ESF Starter Kit

The Large SK™ starter kit provides adequate components and all basic instruments to allow management of any long-bone fracture; appropriate pin sizes range from 3.0mm to 4.8mm. Medium pins (3.2mm) are used much more often than larger pins. Many customers choose to order additional single clamps and pins in order to handle multiple cases before reordering. StickTite™ drill bits and cancellous pins prove to be popular additions as well.

QUANTITY	PART NO.	DESCRIPTION
10	500.000	Small SK™ Single Clamps*
2	500.999	Small SK™ Double Clamps*
1	506.050	9.5mm x 50mm Carbon Fiber Rod
2	506.100	9.5mm x 100mm Carbon Fiber Rod
2	506.150	9.5mm x 150mm Carbon Fiber Rod
2	506.200	9.5mm x 200mm Carbon Fiber Rod
2	506.250	9.5mm x 250mm Carbon Fiber Rod
2	506.300	9.5mm x 300mm Carbon Fiber Rod
1	2.50003	10mm Combination Wrench
1	508.102	10mm Angled Socket Wrench
1	33031	3.1mm ESF Drill Bit
1	33039	3.9mm ESF Drill Bit
1	34031	Drill Sleeve/ESF for 3.1mm Drill Bit
1	34039	Drill Sleeve/ESF for 3.9mm Drill Bit
8	15180	Medium INTERFACE™ Half-Pins
4	20180	Medium CENTERFACE™ Full-Pins
8	15532	Large INTERFACE™ Half-Pins
4	20532	Large CENTERFACE™ Full-Pins



Large SK™ Clamp, SINGLE
Part # 500.000

Utilizes 9.5mm diameter external rods and 10mm wrenches. Supports use of 3.0mm shank, medium, medium-plus and large INTERFACE™ and CENTERFACE™ pins directly through the clamp. Recommended pin shanks 1/8" to 5/32" (3.2mm to 4.0mm). Maximum diameter accepted is 3/16" (4.8mm). Most commonly used pin is the medium 1/8" shank pin.



Large SK™ Clamp, Double
Part # 500.999

For connecting two 9.5mm external rods. Stability provided by positive interlock between clamps. Two 10mm wrenches required.

**Large SK™ CARBON Connecting Rods,
9.5mm Diameter**

Available in 50mm length increments from 50mm to 350mm. Tremendous rod strength compared to traditional KE type rods. Carbon fiber rods offer near radiolucency to simplify radiographic imaging and are by far the most popular. The large 9.5mm carbon fiber SK™ rods are nearly three times stronger than large 5/16" KE aluminum rods and approximately 7 times stronger than medium KE stainless steel rods.



PART NO.	LENGTH
506.050	50mm (Approximately 2 inches)
506.100	100mm (Approximately 4 inches)
506.150	150mm (Approximately 6 inches)
506.200	200mm (Approximately 8 inches)
506.250	250mm (Approximately 10 inches)
506.300	300mm (Approximately 12 inches)



**Large SK™ 10mm Combination Wrench
Part # 2.50003**

A second wrench is necessary when utilizing double clamps. This wrench can also be applied to the flat surfaces of the primary pin-gripping bolt to counter torque forces as the large SK™ single clamp is tightened

Large SK™ ESF Components

10mm Angled Socket Wrench Part No. 508.102

This quick- and easy-to-use wrench has proven very popular and durable. Also compatible with the IMEX™ Circular ESF System.



ESF (External Skeletal Fixation) Drill Bits

ESF drill bits are made of hardened stainless steel in diameters appropriate for pre-drilling of standard KE size INTERFACE™ and CENTERFACE™ ESF pins, large cancellous pins, and IMEX™ 6.3mm shank large animal transfixation pins.



PART NO.	DESCRIPTION	RECOMMENDED ESF PINS
33031	3.1mm X 6"	Medium 1/8" pin shanks
33039	3.9mm X 6.25"	Large 5/32" pin shanks

Drill Sleeves

Designed for through-the-clamp pre-drilling with SK™ single clamps, but can be an effective drill sleeve for a variety of applications.

PART NO.	CORRESPONDING DRILL BIT	ALTERNATIVE DRILL BIT	SK™ CLAMP
34031	3.1mm	2.7mm	Small or Large
34039	3.9mm	3.5mm	Large



External Skeletal Fixation Pins



INTERFACE™ Fixation Half-pins, Standard (cortical) Thread Profile

INTERFACE™ fixation half-pins are end-threaded pins with positive thread profiles. The threaded end has a trocar point. Pre-drilling is recommended for optimum placement. Small, medium, and large are based on the KE standard of 3/32", 1/8", and 5/32" shanks respectively. Standard thread profile pins can be utilized at all locations and is the most popular and versatile version. Standard length versions are most popular, but extended length versions are useful when additional thread length is needed to span areas of larger bone diameter. IMEX™ INTERFACE™ fixation pins do not feature the thread profile of a bone screw, but are designed with the unique environmental and mechanical differences between a bone screw and ESF pin being taken into design consideration.

All INTERFACE™ fixation half-pins are produced from the highest quality, implant grade 316LVM stainless steel.

All can be utilized with acrylic or epoxy frames.

All sizes can be accommodated with the SK™ ESF System.

15020 (2.0mm shank) is the largest pin recommended for the MINI SK™ ESF Clamp. 15020 (2.0mm shank) and 15030 (3.0mm shank) are particularly advantageous with European fixator systems that utilize 2.0mm and 3.0mm fixation pins.

PART NO.	SHANK DIAMETER	RECOMMENDED DRILL BIT SIZE	THREAD DIAMETER	THREAD LENGTH	OVERALL LENGTH
MEDIUM					
15180	1/8" (3.2mm)	3.1mm	5/32" (4.0mm)	1-1/4" (31mm)	4-1/2" (115mm)
LARGE					
15532	5/32" (4.0mm)	3.9mm	3/16" (4.8mm)	1-1/2" (38mm)	6" (150mm)

External Skeletal Fixation Pins



CENTERFACE™ Fixation Full-pins, Standard (cortical) Thread Profile

IMEX™ CENTERFACE™ fixation full-pins are centrally-threaded pins with a positive thread profile. One end is trocar-pointed. The small, medium, and large sizes were developed to be compatible with the KE clamp and to maximize the shank diameter of threaded pins utilized with the KE clamp. The standard thread profile can be used at all locations and is the most popular and versatile thread version. Standard length versions are the most popular, but limited numbers of extended length versions should be available for special circumstances. IMEX™ CENTERFACE™ fixation pins do not feature the thread profile of a bone screw, but are designed with the unique environmental and mechanical differences between a bone screw and ESF pin being taken into design consideration.

All CENTERFACE™ fixation full-pins are produced from the highest quality, implant grade 316LVM stainless steel.

All can be utilized with acrylic or epoxy frames.

All sizes can be accommodated with the SK™ ESF System.

20020 (2.0mm shank) is the largest pin recommended for the Mini SK™ ESF clamp. 20020 (2.0mm shank) and 20030 (3.0mm shank) are particularly advantageous with European fixator systems that utilize 2.0mm and 3.0mm fixation pins.

PART NO.	SHANK DIAMETER	RECOMMENDED DRILL BIT SIZE	THREAD DIAMETER	THREAD LENGTH	OVERALL LENGTH
MEDIUM					
20180	1/8" (3.2mm)	3.1mm	5/32" (4.0mm)	1-1/4" (30mm)	5" (125mm)
LARGE					
20532	5/32" (4.0mm)	3.9mm	3/16" (4.8mm)	1-1/2" (38mm)	6" (150mm)

LARYNGOSCOPE SET ANESTHESIA FIBER OPTIC TOC

WELCH ALLYN INCORPORATED

MODEL # 68696

Manufacturer's Phone: (315) 685-4458 FAX: (315) 685-3361

Website: <http://www.welchallyn.com>

AAC "L" ITEM NSN 6515-01-519-4529

UA's: 4901, 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$518.47

System Description: The Laryngoscope is a single-piece stainless steel construction that ensures blade integrity. It comes with a removable light pipe and smooth surface design; the blades are upgradeable and repairable.



Laryngoscope Set

LARYNGOSCOPE SET CHARACTERISTICS


Case Dimensions	Height	19 1/2"
	Width	14"
	Depth	4 3/4"
Weight	9.545 lbs	
Cube	.154	
Power Requirements	Battery Operated C Cell "AA" cell required	



Spare Lamps # 06000-U NSN 6515-01-519-4257
Lamp # 608125-501 NSN 6240-01-526-9631
Miller Size 0 # 68060 NSN 6515-01-527-2281
Miller Size 1 #68061 NSN 6515-01-442-3002



“AA” Handle # 60814 NSN 6515-01-445-1081
“C” Size Handle # 60813 NSN 6515-01-445-1082

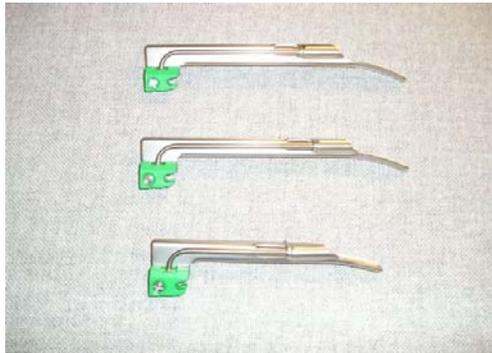

Miller Blade Size 2 # 68062 NSN 6515-01-527-2283
Miller Blade Size 3 # 68063 NSN 6515-01-519-4239
Miller Blade Size 4 # 68064 NSN 6515-01-527-2286

**LARYNGOSCOPE SET FIBER OPTIC BATTERY
CONSUMABLES/ACCESSORIES (START-UP)**

NSN	NOTES	Nomenclature	QTY	UI	PART #	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
	Included with NSN	PELICAN CASE	1	EA							
6515015194257	Included with NSN	LIGHT BULB LARYNGOSCOPE	4	EA	06000-U	\$30.37	\$121.98	WELCH ALLYN	N\A	N	2
6240015269631	Included with NSN	CARTRIDGES, LAMP	1	EA	608125-501	\$50.00	\$50.00	WELCH ALLYN	N\A	N	2
6515015272281	Included with NSN	MILLER BLADE SIZE 0	1	EA	68060	\$109.51	\$109.51	WELCH ALLYN	N\A	N	2
6515014423002	Included with NSN	MILLER BLADE SIZE 1	1	EA	68061	\$109.51	\$109.51	WELCH ALLYN	N\A	N	2
6515 015194259	Included with NSN	"AA" HANDLE	1	EA	60814	\$132.97	\$132.97	WELCH ALLYN	N\A	N	2
6515014451082	Included with NSN	"C" SIZE HANDLE	1	EA	60813	\$79.39	\$79.39	WELCH ALLYN	N\A	N	2
6515015272283	Included with NSN	MILLER BLADE SIZE 2	1	EA	68062	\$109.51	\$109.51	WELCH ALLYN	N\A	N	2
6515015194239	Included with NSN	MILLER BLADE SIZE 3	1	EA	68063	\$182.59	\$182.59	WELCH ALLYN	N\A	N	2
6515015272286	Included with NSN	MILLER BLADE SIZE 4	1	EA	68064	\$109.51	\$109.51	WELCH ALLYN	N\A	N	2
See Resupply		AA Cell Battery	1	EA				WELCH ALLYN	N\A	N	2
See Resupply		C Cell Battery	1	EA				WELCH ALLYN	N\A	N	2

**LARYNGOSCOPE SET FIBER OPTIC BATTERY
CONSUMABLES/ACCESSORIES (RESUPPLY)**

NSN	Nomenclature	QTY	UI	PART #	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6515015194257	LIGHT BULB LARYNGOSCOPE	4	EA	06000-U	\$30.37	\$121.98	WELCH ALLYN	N\A	N	2
6240015269631	CARTRIDGES, LAMP	1	EA	608125-501	\$50.00	\$50.00	WELCH ALLYN	N\A	N	2
6515 015194259	"AA" HANDLE	1	EA	60814	\$132.97	\$132.97	WELCH ALLYN	N\A	N	2
6515014451082	"C" SIZE HANDLE	1	EA	60813	\$79.39	\$79.39	WELCH ALLYN	N\A	N	2
6135009857845	AA Cell Battery	1	EA	C18.1	\$4.78	\$4.78	AMERICAN NATIONAL STANDARDS	N\A	N	2
6135009857846	C Cell Battery	1	EA	EN93	\$7.83	\$7.93	DANBURY UNION CARBIDE	N\A	N	2

LIGHT HEAD GENERAL PURPOSE HEADBAND [TOC](#)

WELCH ALLYN INCORPORATED

MODEL # 49020

Manufacturer's Phone: (315) 685-4560 FAX: (315) 683-3361

Website: <http://www.welchallyn.com>

AAC "J" ITEM NSN 6230-01-520-3474

UA's: 2267, M301, M308, M309, 4901, 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$754.53

Special Features :

- Weighting less than four ounces, it's one of the most comfortable lightweight headlights available
- With a color temperature of 5500 Kelvin, this light supplies bright, white, shadow-free light allowing the end user to see tissue characteristics without distortion
- It's operating life expectancy is 10,000
- Enjoy the flexibility of operating the headlight using the direct power source or the rechargeable "belt-clip: portable power source.

Clinical Benefits

- Long operating life (10,000 hours of continuous burn)
- More energy efficient than incandescent and halogen lamps
- Cool beam is safe to touch
- Instant light (less than 100ns)
- Virtually maintenance-free operation
- No UV rays

Suggested Applications The Solid State Procedure Headlight provides ideal illumination for procedures such as minor surgery, general examinations, foreign body removal, OB/GYN applications and procedures, dermatology examinations or any procedure that requires a small, homogenous and well-defined spot.

**WELCH ALLYN.
SURGICAL HEADLIGHT**



Technical Specifications

Spot Size Range: 1.5 to 6 inches at the working distance **Light Source:** Five-watt Solid State lamp, color temperature 5500 Kelvin, TBD Lumens, life 10,000 hours continuous burn

Working Distance: 16 inches


Battery Run-Time: One hour continuous run-time on a fully charged battery

Battery Life: Approximately 2.5 years (depending on usage)

Warranty: One-year limited warranty

CONSUMABLES ACCESSORIES (STARTUP)

NSN	NOTES	Nomenclature	PN	QT Y	UI	Unit Price	Total Price	MFG	CONUS Ship Time, weeks
6530015225307	Included W/NSN	Carrying Case	49099	1	EA	\$193.98	\$193.98	WELCH ALLYN	2
6230015221304	Included W/NSN	Charger Only for Portable Power Source	74180	1	EA	\$37.11	\$37.11	WELCH ALLYN	2
6230015221307	Included W/NSN	Portable Power Source Only	75200	1	EA	\$154.78.	\$154.78	WELCH ALLYN	2
6230015221337	Included W/NSN	Direct Power Supply	75270	1	EA	\$50.75	\$50.75	WELCH ALLYN	2

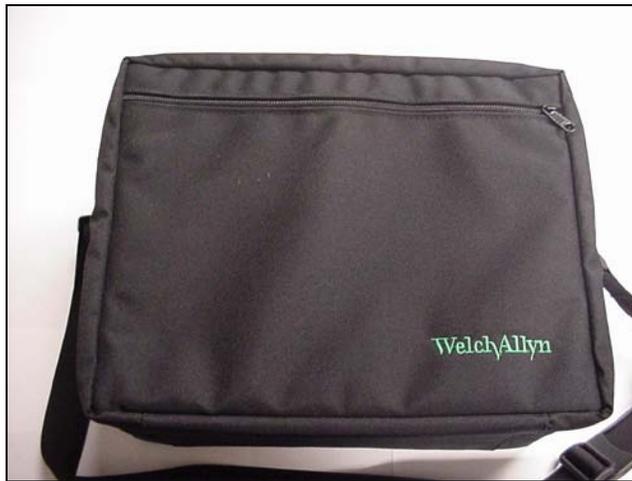

**CARRYING CASE, PART# 49099
6530015225307**



**PORTABLE POWER SOURCE ONLY,
PART # 75200
6230015221307**



**DIRECT PLUG IN TRANSFORMER
UNIT, PART # 75270
6230015221337**



**CHARGER, PART # 74180
6230015221304**

LIGHT SURGICAL STAND COLOR CORRECT SHADOW TOC

FEDMEDICAL INC

MODEL # FMI301FB

Manufacturer's PHONE: (843) 554-7004 FAX: (843) 832-4343

Website: <http://www.fedmedical.com>

AAC "W" ITEM NSN 6530013168733

AAC "J" ITEM NSN 6530-01-518-9854

UA's: 2267, 4901, 4905, N308, N309

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$6,236.57

System Description: Color-correct, shadow-free, illumination, full-sized surgical light, floor mounted, swivel light, 12V halogen bulb, 50 watt, lamp housing diameter, 11.4 inch, 6 hour back-up battery and case, for field or theater of operation use, ultra-light suspension. The base of this light is made of 14 gauge, powder coated steel and can hold 250 lbs. The lamp suspension allows fingertip control and secure, drift-free positioning.

Special Features:

Internal "smart" circuit automatically adjusts for 110-220VAC or 24VDC 62 amp hr 50,000 lux of color-correct brilliance at (1-m)

More accurate tissue differentiation and diagnosis—with 4,500 K color temperature for truer colors

27" depth of field and 5.5" field diameter


Optimized shadow reduction

Sealed light head keeps contaminants out

Quick, tool-free bulb exchange

Extremely low heat emission

Drift-free suspension

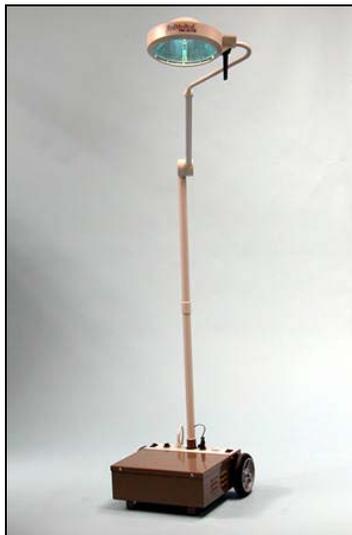

CHARACTERISTICS

Dimensions Case	Height	20"	Maximum from lens to floor 78" (198 cm)
	Width.	28"	
	Depth	34"	
Weight		120 lbs	
Cube Ft		11.01	
Operating Temperature		35°F to 130°F	
Operating Humidity		90 RH	
Storage Temperature		32°F to 150°F	
Storage Humidity		99 RH	
Power Requirements		110-220 VAC	24 VDC
Amps		55 amps	2 amps
Watts		230 watts	



BASE OF SYSTEM



HARDENED CASE

LIGHT SURGICAL ACCESSORIES (START-UP) & (RESUPPLY)

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6530015275566	Included W\NSN	Reusable,sterilizable light handle cover	41-2001	1	EA	\$89.25	\$89.25	Fedmedical inc.	N	N	2
6530015275501	Included W\NSN	Disposable light handle cover	41-2002	1	BX\25s	\$85.45	\$85.45	Fedmedical inc.	N	N	2
6530015275497	Included W\NSN	Bulb, 12 volt, 50 watt, Halogen	41-2010	1	EA	\$87.35	\$87.35	Fedmedical inc.	N	N	2
6530015275487	Included W\NSN	15 ft DC cord w/connector	41-2020	1	EA	\$60.75	\$60.75	Fedmedical inc.	N	N	2
6530015275490	Included W\NSN	Hardened case with foam	41-2100	1	EA	\$844.65	\$844.65	Fedmedical inc.	N	N	2
6130015263300	Included W\NSN	12 VOLT Battery, 55 amp hour	41-1002	1	EA	\$100.00	\$100.00	Fedmedical inc.	N	N	2

MICROSCOPE OPTICAL LAB GENERAL PURPOSE [TOC](#)

NIKON INC

MODEL # ECLIPSE 50i-TE-4PA TILT HEAD MIC

Manufacturer's PHONE: (631) 547-8526 FAX: (631) 547-8652

Website: <http://www.nikonusa.com/template.php?cat=5&grp=25&productNr=50i>

AAC "J" ITEM NSN 6650-01-519-8473

UA's: 3263, 3504, 3905, 3912, 4905, 4912, 4914, N403

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$7,009.80

System Description: This is a standard laboratory microscope for use in variety of clinical specialty setting. It includes objectives at the following magnification 4X, 10X, 40X, and 100X. It is also adaptable for high resolution bright field, dark field, EPI-Fluorescence and phase contrasts use. The light source (bulb), power cord, and optics interchangeable with E400 (NSN 6650-01-501-2807); The body tube contains access port in back adaptable for use with a camera using "C" mount adapter. It comes with case.



Microscope ECLIPSE 50i-TE-4PA



Case, Microscope 50i

MICROSCOPE OPTICAL LAB PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height	22 inches
	Width	17 inches
	Depth	12.7 inches
	Cube	2.93 cu ft
Weight		40 lbs
Operating Temperature Range		50° F to 95° F
Storage Temperature Range		Not to exceed 105 °F
Relative Humidity (in use)		Less than 85%, noncondensing
Relative Humidity (storage)		Less than 90%, noncondensing
Power Requirements		110/220 volts; 9 amps
Watts		148 watts

**MICROSCOPE OPTICAL LAB
CONSUMABLES/ACCESSORIES (START-UP)**

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6240015429964	Included W/NSN	Bulb, Halogen	84246	1	EA	\$14.07	\$14.07	Nikon Inc.	Indef.	N	3
6650015426063	Included W/NSN	Power cord, grounded three wire	79035	1	EA	\$10.89	\$10.89	Nikon Inc.	Indef.	N	3
	Included W/NSN	Case Hardened, shippable, for 50i/55i	92405	1	EA	\$525.00	\$525.00	Nikon Inc.	Indef.	N	3
6640000744191	IN THE UA	Glass Slide	3703-2F	12	PG72s	\$36.16	\$433.92	ELITE MED PROD	Indef.	N	3
6640006180066	IN THE UA	Glass Covers	M6020-2	2	PG	\$81.06	\$162.12	CARDINAL HEALTH	Indef.	N	3

MICROSCOPE OPTICAL LAB CONSUMABLES (RESUPPLY)

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months
6240015429964	Bulb, Halogen	84246	1	EA	\$14.07	\$14.07	Nikon	Indef.
6640000744191	Glass Slide	3703-2F	12	PG72s	\$36.16	\$433.92	ELITE MED PROD	Indef.
6640006180066	Glass Covers	M6020-2	2	PG	\$81.06	\$162.12	CARDINAL HEALTH	Indef.

MONITOR VITAL SIGNS W/SPO₂,W/CAPNO TOC

WELCH ALLYN

MODEL#: PROPAQ 206EL MONITOR W/SPO₂ AND CAPNOGRAPHY

(Side stream, mainstream or dual)

Manufacturer's PHONE: (503) 530-7500 FAX: (503) 530-4910

Website:<http://www.welchallyn.com>

AAC "W" NSN 6515-01-465-3289

AAC "J" NSN 6515-01-432-2711

UA's: 2267, 3267, 267B, 905A, 912A, N301, N308, N309, N432, F301, F308, F309, F383

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: SPO₂,Capnography (Sidestream, mainstream or dual \$10,548)

System Description: Rugged, lightweight, portable vital signs monitor for field use

TEST PERFORMED

Heart/Pulse rate 3-5 Lead ECG Non Invasive BP 2 Channel Invasive BP Temperature Pulse Oximetry Respiration

ADVANTAGES


Motion tolerant monitoring. Small, lightweight Ease of use Modular Ruggedized Automatic sensor detection

PROPAQ 206 EL VITAL SIGNS MONITOR FRONTAL VIEW




Operator Familiarization: CD-ROM is available.

**PROPAQ 206 EL VITAL SIGNS MONITOR
LEFT SIDE VIEW**

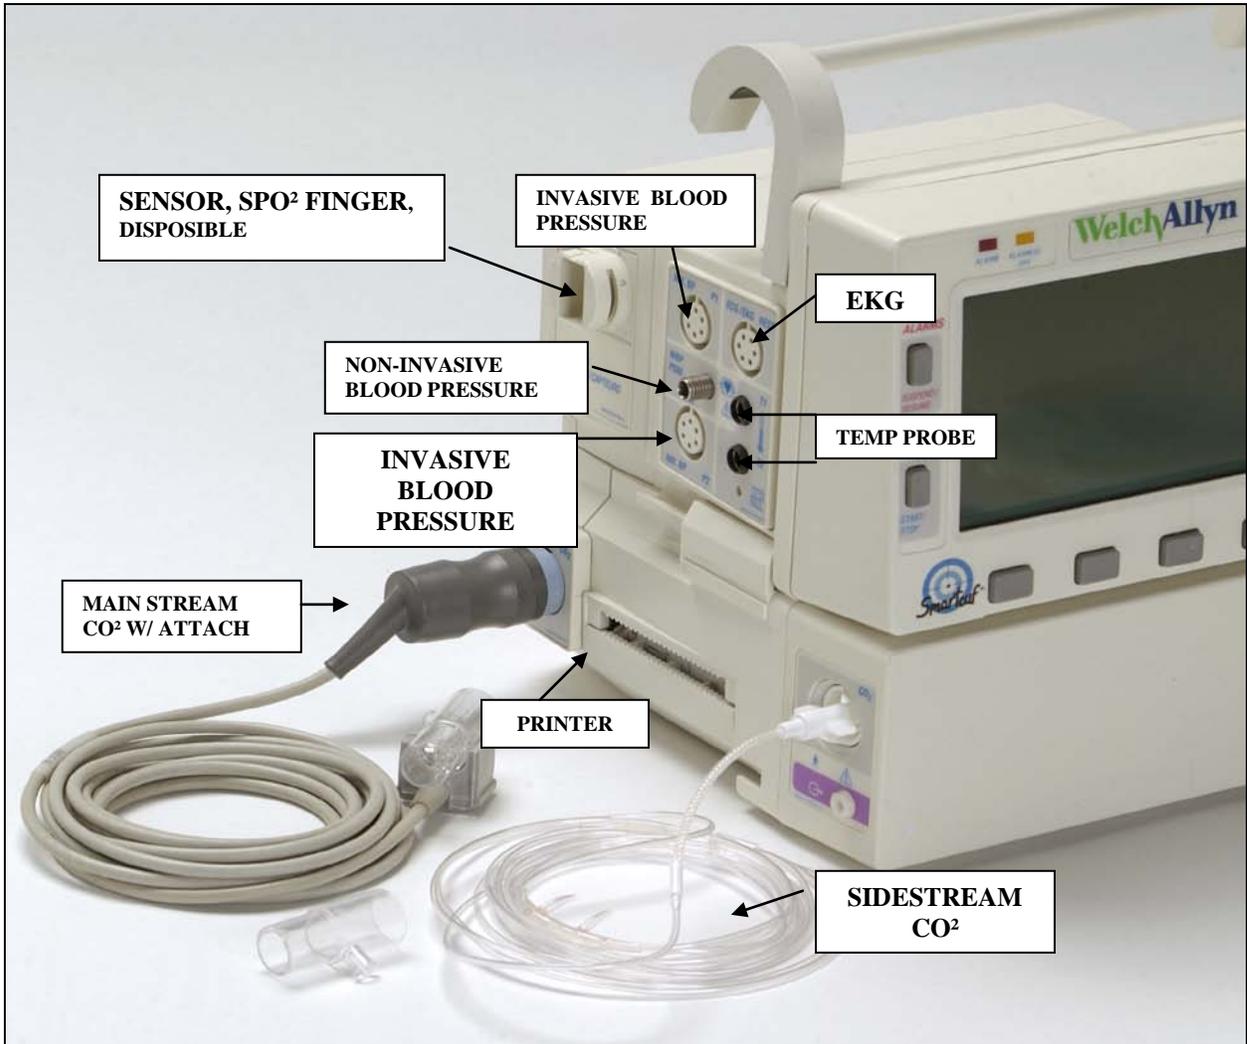


**PROPAQ 206 EL VITAL SIGNS MONITOR
RIGHT SIDE VIEW**

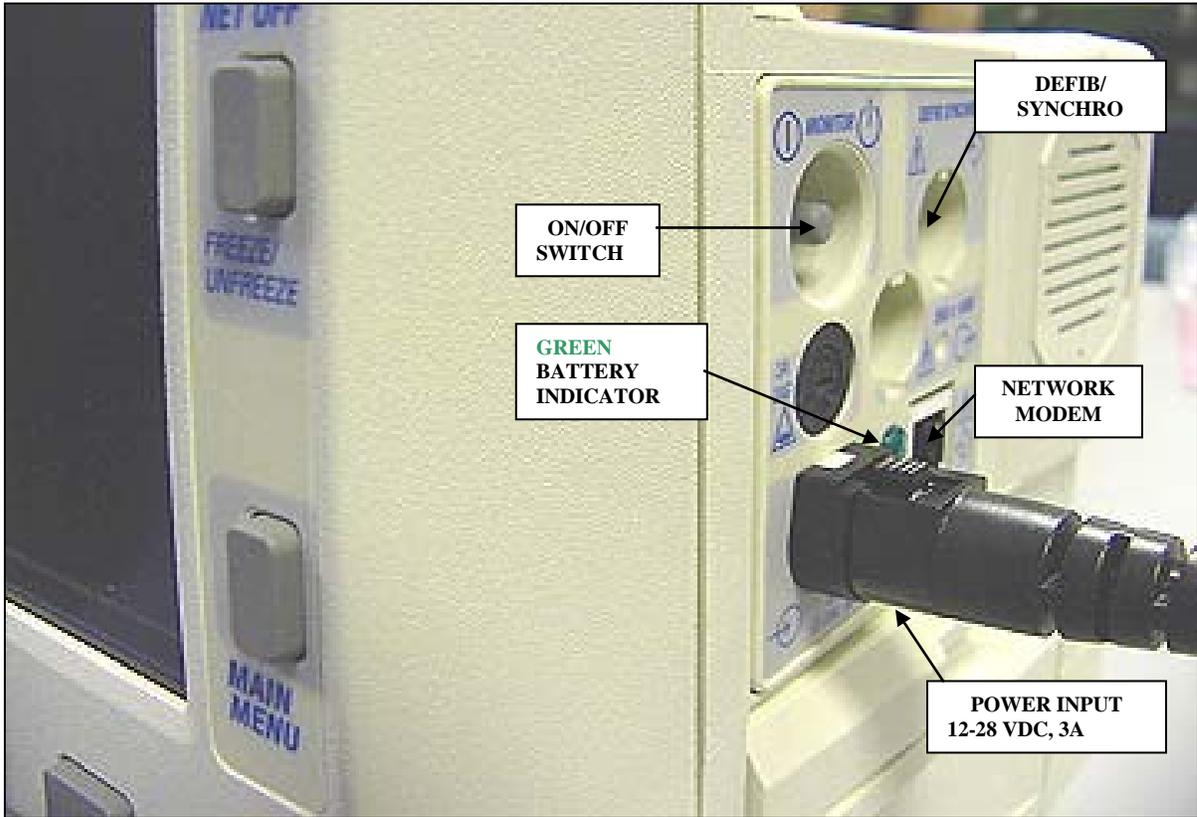




**ECG CABLE, 5 LEAD,
(008-0313-00)**

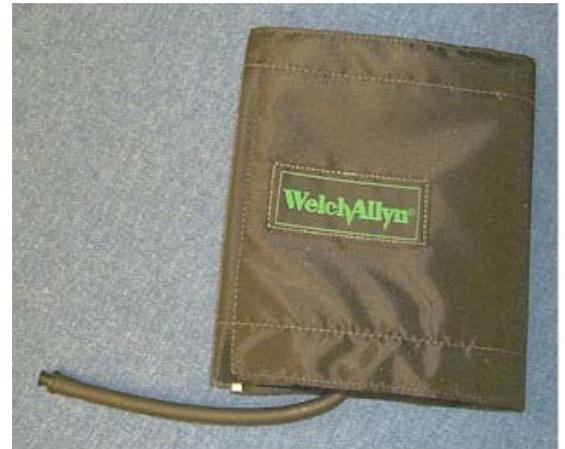

NIBP CUFF, ADULT (008-0628-00)

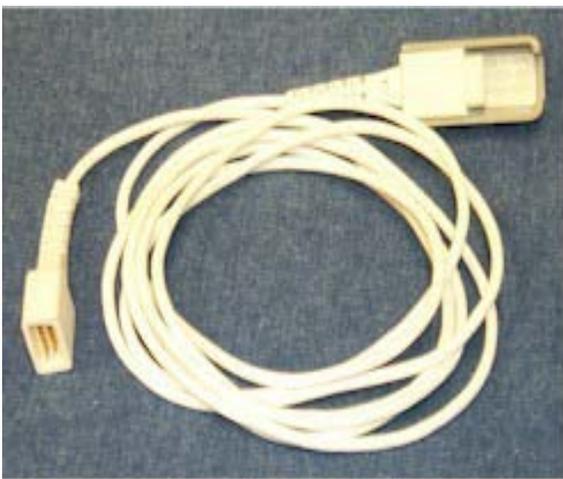

**CABLE, PULSE OXIMETRY, 8 FEET,
(008-0742-00)**




**HOSE, NIBP ADULT/PEDIATRIC,
(008-0238-00)**




AC POWER ADAPTER, (503-0054-00)




DURASENSOR REUSABLE FINGER, SPO₂, (900-0021-00)

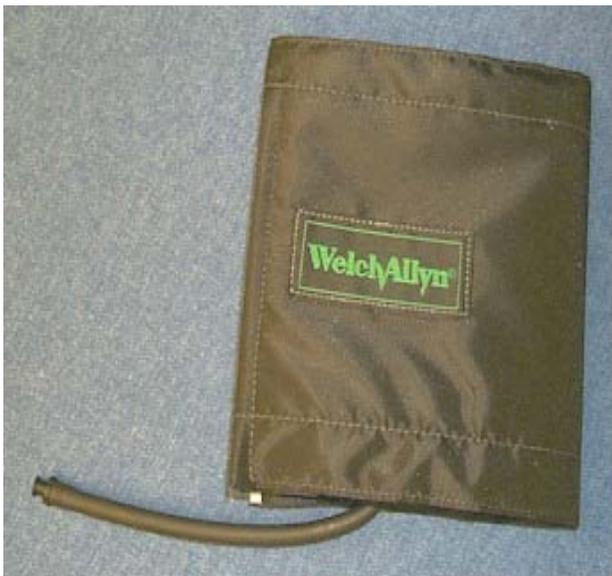

NIBP CUFF KIT ADULT, (008-0324-00)

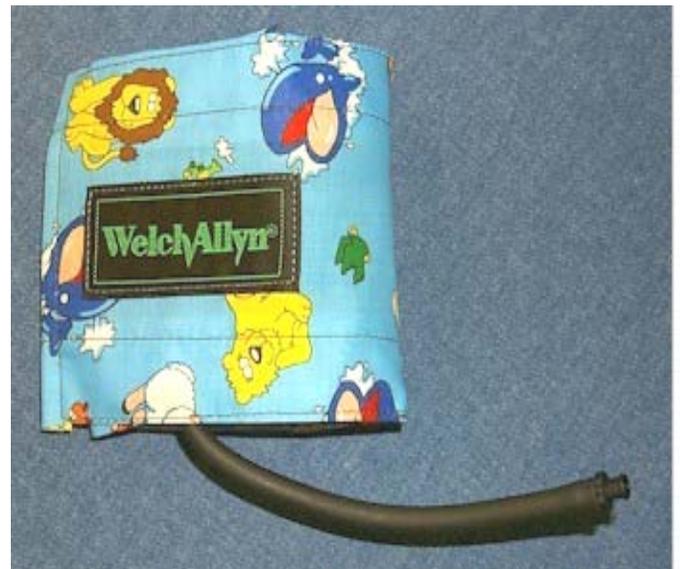


NIBP CUFF KIT PEDIATRIC, (008-0324-00)

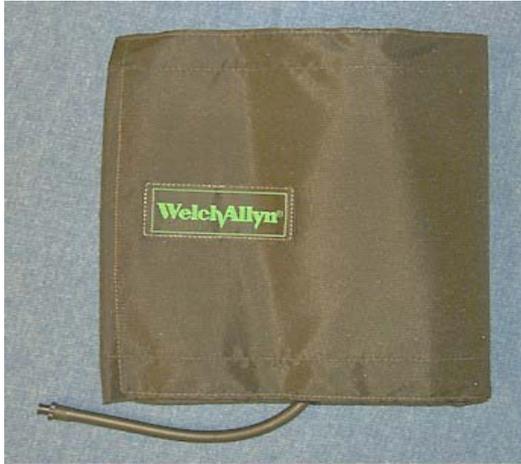


**KIT NIBP CUFF THIGH,
(008-0324-00)**



TEMPERATURE PROBE, (008-0230-00)

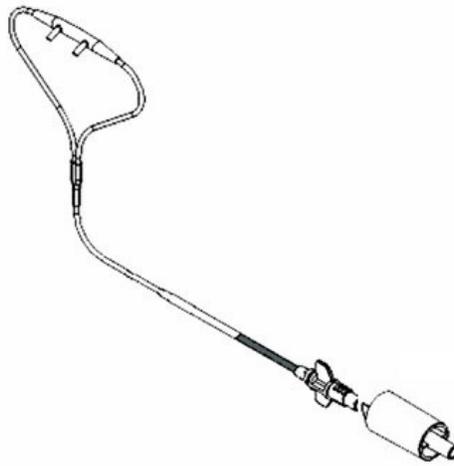

**SIDE STREAM CANNULA CO² W/WATER TRAP
ADULT (008-0769-00)
CHILD (008-0770-00)**

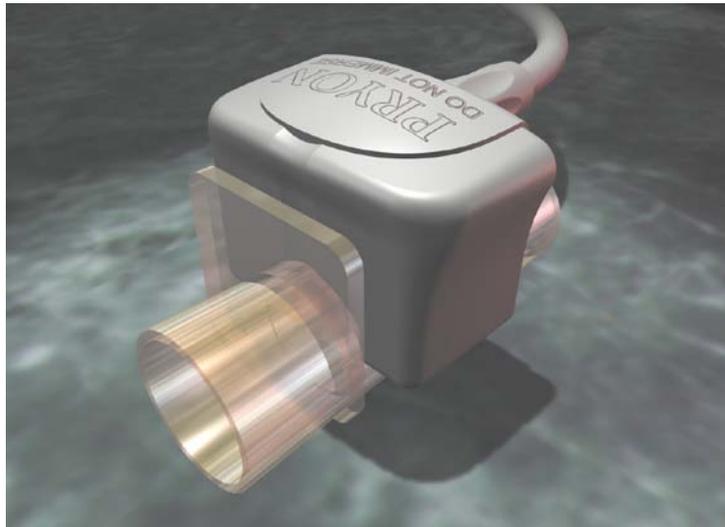

**CO² Sensor Airway Adapter with 10' cable
008-0502-00**

**CO² Airway Adapters Single Pt use for Mainstream only
008-0367-00**



**MILITARY REUSABLE CONTAINER
(008-0586-00)
WITH ACCESSORIES SHOWN**

PROPAQ 206EL PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height	9.6"
	Width	8.2"
	Depth	7.6"
Weight		13.5 lbs
Operating Temperature		0° to 40°C degrees
Storage Temperature		-20° to 60°C degrees
Humidity non-condensing		15% to 95%
Power Requirements		110/208VAC=/- 10%, 50/60 HZ .06 KW 12-23 VDC

VITAL SIGNS MONITOR WITH SPO² AND CAPNOGRAPHY (START-UP)

NSN	NOTES	Nomenclature	QTY	UI	PART #	UNIT PRICE	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
See Resupply 10 Rolls	Incl W/ NSN	Paper 3 Rolls	3	EA	See Resupply 10 Roll			Welch Alllyn	Indef	N	2
6515015189543	Incl W/ NSN	1 pkg of 5 Electrodes Gelled	1	PG	6200-10	\$5.00	\$5.00	Welch Alllyn	indef	N	2
6515015195855	Incl W/ NSN	Electrodes Electrocardiograph	1	30/BG	6200-11	\$22.39	\$22.39	Welch Alllyn	indef	N	2
6515015189559	Incl W/ NSN	Military Container	1	EA	008-0586-00	\$576.40	\$576.40	Welch Alllyn	Indef	N	2
6515015190163	Incl W/ NSN	Pulse oximetry probe reusable durasensor DS100A	1	EA	900-0021-00	\$337.00	\$337.00	Welch Alllyn	Indef	N	2
6515015189839	Incl W/ NSN	Temp Probe General Purpose Reusable Adult	1	EA	008-0230-00	\$63.32	\$63.32	Welch Alllyn	Indef	N	2
6515014989984	Incl W/ NSN	Temp Extension Cable, 10 ft for Reusable Temp probe	1	EA	008-0235-00	\$49.75	\$49.75	Welch Alllyn	Indef	N	2
6515015189556	Incl W/ NSN	NIBP Cuff, adult standard reusable w/ "twist lock" connector	1	EA	008-0628-00	\$35.00	\$35.00	Welch Alllyn	Indef	N	2
6515015190962	(Must Designate 5 Lead) Incl W/ Nsn	ECG Cable, 5 lead, 10 foot, W/ 5 attached lead wires, snap	1	EA	008-0313-00	\$91.00	\$91.00	Welch Alllyn	Indef	N	2
6515015191102	Incl W/ NSN	AC Adapter for recharging battery, 120 VAC 60 HZ	1	EA	503-0054-02	\$122.00	\$122.00	Welch Alllyn	Indef	N	2
6515015039828	Incl W/ NSN	Power Cord, Hospital Grade 100-120 VAC	1	EA	008-0333-00	\$23.00	\$23.00	Welch Alllyn	Indef	N	2
6515015010661	Incl W/ NSN	Cable, Pulse Oximetry, 8 foot extension	1	EA	008-0742-00	\$65.00	\$65.00	Welch Alllyn	Indef	N	2
6515014365080	Incl W/ NSN	Hose, NIBP Adult/Pediatric	1	EA	008-0238-00	\$20.00	\$20.00	Welch Alllyn	Indef	N	2
6515015191100	Incl W/ NSN	Cuff Kit, NIBP adult reusable w/ "twist lock" connector	1	EA	Keep old #008-0324-00	\$94.97	\$94.97	Welch Alllyn	Indef	N	2
7610015189140	Incl W/ NSN	Technical Reference Guide (Service Manual), CD FORMAT	1	EA	810-1084-01	\$45.00	\$45.00	Welch Alllyn	Indef	N	2
7610015436723	Incl W/ NSN	Service Manual), Hard Copy Format	1	EA	810-1316-02	\$45.00	\$45.00	Welch Alllyn	Indef	N	2
7610015189122	Incl W/ NSN	Operator's Manual Hard Copy Format	2	EA	810-0867-00	\$45.00	\$90.00	Welch Alllyn	Indef	N	2
6515015224095	Incl. W/Nsn	Adult Nasal Cannula w/SamplingLine and Water trap	1	BX	008-0769-00	\$317.00	\$317.00	Welch Alllyn	Indef	N	2
6515 014755511	Incl. W/Nsn	CO2 Sensor Airway Adapter with 10' cable	1	EA	008-0502-00	\$1899.45	\$1899.45	Welch Alllyn	Indef	N	2
6515014468319	INCL. W/NSN	Adapter CO ² Airway Patient Vital Signs Monitor Adult/Pediatric	1	EA	008-0132-00	\$144.05	\$144.05	Welch Alllyn	Indef	N	2
6515 014989984	Incl. W/Nsn	Cable Temperature 10' Ext. For Reusable Temp Probe	1	EA	008-0235-00	\$49.98	\$49.98	Welch Alllyn	Indef	N	2
6515015193763	Incl W/Nsn	Probe, Temperature, Reusable, Adult General Purpose	1	EA	008-230-00	\$49.75	\$49.75	Welch Alllyn	Indef	N	2

**VITAL SIGNS MONITOR WITH SPO² AND CAPNOGRAPHY
(RESUPPLY)**

NSN	Nomenclature	QTY	UI	PART #	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks	NOTES
6515014128673	Paper, Printer, Roll	1	10PG	008-0040-98x	\$27.00	\$27.00	Welch Allyn	Indef	N	2	
6515 015195855	Electrodes Electrocardiograph	1	30pg	6200-11	\$22.39	\$22.39	Welch Allyn	indef	N	2	FINGER 6 PATIENTS
6515014470079	Adapter airway CO ² single PT USE low dead space	1	10/pg	008-0263-00	\$163.25	\$163.25	Welch Allyn	indef	N	2	

The Propaq 206 monitors are shipped complete with adult, pediatric, and neonatal monitoring capability. The monitor includes 3 or 5 lead ECG (user specified), NIBP, 2 IBP, 2 TEMP, Respiration and Nellcor SpO₂. Includes a 3 year warranty.

**VITAL SIGNS MONITOR WITH SPO² AND CAPNOGRAPHY
OPTIONAL ADDITIONAL ACCESSORIES**

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6515012714894	Optional	Sensor ,SPO ₂ ,Finger Disposable	D-25	01	EA	\$394.18	\$394.18	NELLCOR	indef	N	2
6515014466260	Optional	CO ₂ Sensor Airway Adapter w/10 ft cable for Mainstream	008-0130-01	01	EA	\$2,016.63	\$2,016.63	Welch Allyn	N	N	2
6515 015224081	Optional	CO ₂ Airway Adapters, Multi-use Adult/Peds	008-0261-00	01	EA	\$691.95	\$691.95	Welch Allyn	N	N	2
6515 014470079	Optional	CO ₂ Airway Adapters, Single PT Use Low Deadspace	008-0263-00	01	EA	\$343.72	\$343.72	Welch Allyn	N	N	2
6515 015224101	Optional	Pediatric Nasal Cannula w/Sampling Line and Water trap	008-0770-00	01	EA	\$328.00	\$328.00	Welch Allyn	N	N	2
6515 015224084	Optional	CO ₂ Airway Adapters Single Pt use for Mainstream only	008-0367-00	01	EA	\$288.00	\$288.00	Welch Allyn	N	N	2
6515013960711	Optional	Paper EKG 100 ft yd L X 60MM w/100 rolls	008-0040-99	01	EA	\$271.35	271.35	Welch Allyn	N	N	2
6515014346106	Optional	Cable Monitoring Set Arterial Pressure Reusable 15 ft	42661-04	01	EA	\$118.58	\$118.58	Abbott	N	N	2
6515014341421	Optional	Monitoring Set Arterial Pressure Sterile /20s	42589-05	02	PG	\$871.81	\$1,743.62	Abbott	N	N	2

PATIENT WARMING UNIT, BAIR HUGGER TOC

AUGUSTINE MEDICAL

Bair Hugger W/CASE

Model# 505

Manufacturers' Phone: (952) 947-1200 FAX: (952) 947-1400

Website: <http://www.latinhealthgroup.com/warmingUK.htm>

AAC "W" ITEM NSN 6530-01-519-4798

AAC "J" ITEM NSN 6530-01-463-6823

UA's: 2267, M301, M308, M309, 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$988.00

System Description: Forced-air warming unit providing safe, quiet and effective warming to patients.

Features: Portable, lightweight, unique snap-fit hose for easy blanket attachment. Easily attaches to an IV pole or bedrail.





BAIR HUGGER PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height	13"
	Width	10"
	Depth	11"
Weight	11.5 lbs	
Operating Temperature	High 109.4° ± 5.4°F Med 100.4° ± 5.4°F LOW 89.6° ± 5.4°F	
Air Flow	28 cu ft/min	
Storage Temperature	-40 to+122°F	
Humidity non-condensing	15 to 90 %	
Power Requirements	120 VAC/60 Hz 9.5 amps, 1100 watts	220 VAC/50 Hz 4.5 amps 1000watts

BAIR HUGGER ACCESSORIES (START-UP) PACKAGE

NSN	Notes	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6515015290179	IN THE UA	BLANKET WARMING VET10	53777	1	EA	\$130.00	\$130.00	Arizant Healthcare		N	2
6515015290182	IN THE UA	BLANKET WARMING VET10	31077	1	EA	\$80.00	\$80.00	Arizant Healthcare		N	2
6515015290183	IN THE UA	BLANKET WARMING VET10	55077	1	EA	\$250.00	\$250.00	Arizant Healthcare		N	2
6532015224921	Included W/NSN	Blanket Full body surgical	610	1	10/pg	\$103.50	\$103.50	Augustine Medical		N	2
6532015265337	Included W/NSN	Blanket Surgical Access	570	1	10/pg	\$102.00	\$102.00	Augustine Medical		N	2
6515014636893	Included W/NSN	FILTER	90009	1	EA	\$39.00	\$39.00	Augustine Medical		N	2
6515015242952	Included W/NSN	HOSE	90003	1	EA	\$63.06	\$63.06	Augustine Medical		N	2
6515015242953	Included W/NSN	HOSE CLIP	90017	1	EA	\$4.10	\$4.10	Augustine Medical		N	2
6515 015242947	Included W/NSN	SHEET CLIP	90016	1	EA	\$10.00	\$10.00	Augustine Medical		N	2
7610015222841	Included W/NSN	Operator Manual	OPM			N\C	N\C	Augustine Medical		N	2
7610015222837	Included W/NSN	Service Manual	OSM			N\C	N\C	Augustine Medical		N	2
6530015237536	Included W/NSN	Hardened Case	505252	1	EA	\$1500.00	\$1500.00	Augustine Medical		N	2

BAIR HUGGER CONSUMABLES (RESUPPLY)

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6532-01-522-4921	Blanket Full body surgical	610	1	10/pg	\$103.50	\$103.50	AugustineMedical		N	2
6532-01-526-5337	Blanket Surgical Access	570	1	10/pg	\$102.00	\$102.00	AugustineMedical		N	2
6532-01-356-4851	Blanket lower body	525	1	15/pg	\$146.00	\$146.00	AugustineMedical		N	2
6532-01-388-4182	Blanket upper body	522	1	10/pg	\$122.88	\$122.88	AugustineMedical		N	2
6532-01-387-5842	Blanket Torso	540	1	10/pg	\$122.98	\$122.98	AugustineMedical		N	2
6515015290179	Blanket Warming Veterinary Latex-Free E 35"X24" 10S	53777	1	EA	\$130.00	\$130.00	Arizant Healthcare		N	2
6515015290183	Blanket Warming Veterinary Latex-Free 60"X32" 10S	55077	1	10/PG	\$250.00	\$250.00	Arizant Healthcare		N	2
6515015290182	Blanket Warming Veterinary Latex-Free 60"X37" 10S	31077	1	EA	\$80.00	\$80.00	Arizant Healthcare		N	2
6515014636893	FILTER	90009	1	EA	\$39.00	\$39.00	Augustine Medical		N	2
6515015242952	HOSE	90003	1	EA	\$63.06	\$63.06	Augustine Medical		N	2
6515 015242953	HOSE CLIP	90017	1	EA	\$3.90	\$3.900	Augustine Medical		N	2
6515 015242947	SHEET CLIP	90063	1	EA	\$5.46	\$5.46	Augustine Medical		N	2

PUMP, INFUSION ALARIS TOC

ALARIS
MEDSYSTEM 111
MODEL # 2865B

Manufacturer's Phone: (858) 458-6003, FAX: (858) 458-7507

Website: <http://www.alarismed.com>

AAC "W" ITEM NSN 6515-01-381-4456

AAC "J" ITEM NSN 6515-01-486-4310

UA's: 0257, 2257, 2267, M308, M309, M310, 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$5,704.51

System Description: Three independent infusion channels for the delivery of a wide range of fluids from various containers including syringes. Also provides a secondary delivery of intermittent medications, fluid challenges, or loading doses from each channel. Each line can deliver a separate drug, helping to eliminate incompatibility and drug sequencing concerns.

Advantages: 1. Rapid on-line titration w/o interrupting flow. 2. Configurable air-in-line thresholds, rate and volume ranges, occlusion alarm settings and KVO rates. 3. Titration of drugs in either dose or volumetric rate. 4. Streamlined PMCS and calibration processes.





**Administrative Set Piggy Back
(72213N)
NSN 6515014164032 (100 PG)**



**Administrative Set Main Stream Line
(28034)
NSN 6515014348712 (50 PG)**

IV PUMP PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height	7.9"
	Width	6.0"
	Depth	2.1"
Weight		3.6 lbs
Internal Battery		Main Rechargeable Nicad Battery, Memory Backup Nonrechargeable Lithium
Battery Capacity		Minimum 6 hours with all three channels at 125 ml/hr
Operating Temperature		50°F to 104°F
Humidity		90 %
Power Requirements		110/120VAC/60HZ 6 WATTS AC POWER

IV PUMP CONSUMABLES (START-UP & RESUPPLY)

NSN	Notes	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
651501450-2035	IN THE UA INCLUDED W/NSN	Administration Set Infusion Pump Alaris Compatible 85" 50S	28117E	4	50PG	\$304.59	\$1218.36	ALARIS MEDICAL..	Indef	N	2
6515014523450	IN THE UA INCLUDED W/NSN	Administration Set Infusion Pump Blood IV TUBF/ 6515014864310 20S	28080E	1	20PG	\$389.30	\$389.30	ALARIS MEDICAL	Indef	N	2
6515014348712	IN THE UA INCLUDED W/NSN	Administration set	28034		50PG	\$399.11	\$399.11	ALARIS MEDICAL..	Indef	N	2
6515015281954	IN THE UA	Adapter Airway CO2	2N3345	1	50PG	\$238.63	\$238.63	BAXTER	Indef	N	2
6515014164032	INCLUDED W/NSN	Administration set	72213N		100 PG	\$184.12	\$184.12	ALARIS MEDICAL	Indef	N	2

PUMP INFUSION, AUTO SYRINGE TOC

BAXTER

MODEL # 1M8550

Manufacturer's: PHONE 1-800 THE-PUMP FAX: (847) 970-5994

Website: <http://www.baxter.com>

AAC "J" ITEM NSN 6515-01-496-4213

UA's M301, 4905


USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$ 2,250.00

System Description: This system has 15 preprogrammed functions for infusion of drugs. Expandable up to 70 drug protocols; capable of 18 modes of delivery; 15 continuous and 3 times modes. This system comes with a 110 volt charger, operators manual, pole clamp, and replacement battery pack (C/N 2002-0520). Developed to meet the infusion needs in NICU, Anesthesia and Critical Care, the AUTO SYRINGE AS50 Infusion Pump delivers precise, controlled infusions.

Special Features:

- Configurable Drug Library
- Syringe Plunger Detection
- Backlight Display
- Adjustable Occlusion Specialty
- Selectable Modes of Delivery
- Accepts Syringe Sizes from 1-60cc
- Battery Voltage Indicator
- Adjustable "Near End" Alert
- RS232 Communication Port

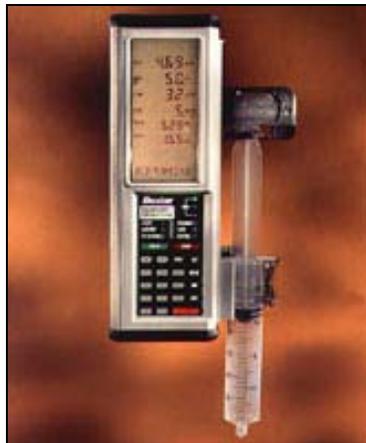

CHARACTERISTICS

Dimensions	Height.	10"
	Width	2.6"
	Depth	3.4"
Weight		4.9 lbs
Cube Ft		.3700
Power Requirements		110 VAC, 50/60 Hz, 11.1 Watts

PUMP INFUSION ACCESSORIES/CONSUMABLES (STARTUP & RESUPPLY)

NSN	NOTES	NOMENCLATURE	P/N	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6515014964218	INCLUDED W/NSN	BATTERY ASSEMBLY 6.-7.4 VOLT, 1.5 AMPS	AAS5001552	1	EA	\$75.00	\$75.00	BAXTER	N/A	N	2
6530015279959	INCLUDED W/NSN	POLE CLAMP	AAS5001500RP	1	EA	\$75.00	\$75.00	BAXTER	N/A	N	2
6130015279987	INCLUDED W/NSN	110 VOLT CHARGER	CAS4001900	1	EA	\$68.04	\$68.04	BAXTER	N/A	N	2
7610 015312931	INCLUDED W/NSN	OPERATORS MANUAL	0719A3430	1	EA	\$15.00	\$15.00	BAXTER	N/A	N	2
6515015281954	IN THE UA	ADMINISTRATION SET50S	2N3345	1	EA	\$37.50	\$37.50	BAXTER	N/A	N	2
6515013520446	OPTIONAL	SYRINGE HYPO GP 60ML CAP LUER LOCK TIP	309653	1	PG/120S	\$54.87	\$54.87	BECTON DICK.	N/A	N	2
6515011656742	OPTIONAL	SYRINGE HYPODERMIC GP 30ML CAPACITY LUER LOCK	15272-00X	1	Bx//25S	\$14.47	\$14.47	BAXTER	N/A	N	2
6515014464615	IN THE UA	ADMINISTRATION SET IV	2C5543	1	48/PG	\$149.19	\$149.19	BAXTER	N/A	N	2

REFRACTOMETER HAND TOC

REICHERT INC.

MODEL # 1310400A

Manufacturer's Phone: (716) 686-4500 FAX: (716)-686-4545

Website: <http://www.reichertai.com/>

AAC "L" ITEM NSN 6650-00-933-3218

UA's: N303, 4912, 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$ 715.00

Features: This is a hand immersion type refractometer with a 3 scale direct reading this unit has a urine specific gravity range from 1.000 to 1.035 w/0.001 graduated intervals and values marked at each 0.005 graduation, serum or plasma protein 2.500 to 15.000 GM/100 ML w/0.1 GM/100ML intervals and values marked at each 0.5 graduation, refractive index 0 to 320 w/ 2.0 intervals and marked at every tenth graduation, temperature compensated measuring prism incorporated, w/recalibration feature, focusing eyepiece, conversion chart, O/A DIA 6.375 in LG X 1.250 in., A protective case is provide



REFRACTOMETER PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Length	6.5 inches
	Diameter	1 inch diameter
Weight		.37 pounds including case
Operating Temperature Range		60 – 100 degrees F
Storage Temperature Range		Never expose to temperatures above 150 Deg F

REFRIGERATOR-FREEZER MECHANICAL FIELD WARD TOC

**MARVEL INDUSTRIES DIV OF NORTHLAND CORP
MODEL # 6CRF**

Manufacturer's Phone: (765) 962-2521 FAX: (765) 962-2493

WEB SITE: www.marvelindustries.com

AAC "W" ITEM NSN 4110-01-180-3420

AAC "J" ITEM NSN 4110-01-425-8009

UA's: M302, M308, M309, M310, 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$660.60

Description: Six cubic foot under counter refrigerator/freezer fits easily under lab benches and casework. Forced air ventilation eliminates need for clearance space in built-in applications. Manual defrost, 5.3 cubic foot refrigerator capacity and .7 cubic foot freezer capacity. Dual voltage capable, carrying handles and olive drab paint scheme.



Characteristics

Overall Dimensions		
	Height	34 in
	Width	23 7/8 in
	Depth	24 in
Weight	120 lbs	
Cubic Ft	17.2 Cu Ft	
Refrigerant	Uses R-134A Refrigerant	
Power Supply	Dual voltage 120/220 VAC 50/60 Hz 320 Watts, 1200 Watt surge	

REFRIGERATOR-FREEZER OPTIONAL ACCESSORY

NSN	Notes	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONU S Ship Time, weeks
6685015296385	OPTIONAL ITEM	Temperature Monitor/Alarm	TMAF	1	EA	\$218.00	\$218.00	MARVEL INDUSTRIES	N/A	N	2

**SCALE WEIGHING VET AUTO HOLD & DAMPENING FUNCTION BAT
POWERED TOC**

Manufacturer: ITIN SCALE COMPANY

Distributor: HENRY SCHEIN INC

MODEL # 2763689

Manufacturer's Phone (718) 336-5900 FAX: (718) 627-1313

Distributor's Phone: (631) 390-8000 x8822 FAX: (631) 390-8166

Website: <http://www.itinscales.com/seca606.htm>

Website: <http://www.henryschein.com>

AAC "L" ITEM NSN 6670 01-529-5385

UA: 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$1,240.77

Systems Description: .This veterinary scale is battery powered for weighing all pets from small birds to the largest dogs. It has an auto hold function that displays weight after the animal has left the scale. The dampening functions ensures correct weight of restless animals.

This is a simple to use, all-purpose veterinary scale from Seca uses either battery or AC power and weighs in pounds/ounces or kilograms/grams. And thanks to the 20 gram to 20 kilogram weighing increments, the scale can be used to weigh either large or small animals - separate scales are no longer necessary! This veterinary scale also features a long battery life: battery capacity is sufficient for 16,000 weighings. You don't need to position the scale near an outlet -- and there's no cord over which you can trip. (But you can use AC power if you'd prefer). The automatic switch-off 5 minutes after the last weighing operation, or after 2 minutes when the scale is not being used saves battery life. Auto Hold function displays the animal's weight even after the animal has left the scale -- this way the scale operator can concentrate on the animal, and not the scale. A new weighing operation can be started without pressing a button beforehand, since the scale is automatically reset to zero when it is loaded again. If it's necessary to repeat the measurement when the animal stays on the scale, the repeat weighing operation can be started by briefly pressing a button. Tare function lets you subtract the weight of any animal carrier from the animal's weight (eg. a cat weighed in a basket). To use the tare function, weigh the carrier first and press the tare button. Then place the animal in the carrier -- the display shows only the animal's weight. This function can also be used to weigh the animal in the owner's arms.

The 3-step dampening function ensures reliable weighing of calm animals (no dampening), restless animals (slight dampening), and very restless animals (strong dampening).

The scale's rough surface is constructed of scratch-resistant plastic and is easy to clean. The anodized frame construction and the sealed wooden plate at the scale's bottom makes the scale highly moisture resistant when the floor becomes wet. And the rubber bases

even out height differences of up to 5 mm, so that stability is ensured when the floor is slightly uneven.

Functions: Tare, Auto hold, Dampening, kg/lb switchable



SCALE CHARACTERISTICS

Dimensions	Height Overall	3.0 inches nominal
	Width Overall	35.5 inches nominal
	Depth Overall	23.7inches nominal
	Cube	1.456 cu ft
Weight		31 lbs
Capacity:		220 lbs (100 kg)
Graduations:		0-50 lbs x 1 oz, 50-150 lbs x 2 oz and 150-220 lb x 4 oz (0-20 kg x 20 g, 20-50 kg x 50 g and 50-100 kg x 100 g)
Tare Range:		100 kg / 220 lbs
Platform:		35.5" x 3" x 23.6"
Functions: Tare:		Tare, Auto hold, Dampening, kg/lb switchable
Operating Temperature Range		N/A
Storage Temperature Range		N/A
Relative Humidity (in use)		N/A
Relative Humidity (storage)		N/A
Power Requirements	Needs 6 AA batteries for up to 10,000 lbs in weight	9 Volts
Watts		N/A

SCALE WEIGHING OPTIONAL ACCESSORY/RESUPPLY

NSN	Notes	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
See Resupply	System Comes With 6 Batteries	Battery nonrechargeable alkaline AA 1.5V		6	EA				36	N	2

SCALE WEIGHING OPTIONAL ACCESSORY/RESUPPLY

NSN	Notes	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6135009857845		Battery nonrechargeable alkaline AA 1.5V	C18.1	1	PG/24	\$41.60	\$41.60	American National Standard	36	N	2
N/A	OPTIONAL ITEM	AC Adapter	909-4760	1	EA	\$131.59	\$131.59	Henry Schein	N/A	N	2

SCREEN X-RAY PROTECTIVE MOBILE 6FT H 2.5FT TOC

**Manufactured By: FLUKE BIOMEDICAL LLC
MODEL # 56-603**

**Manufacturer's Phone: (440) 498-2565 FAX: (440) 498-0000
Manufacturer's Website: http://207.57.22.55/cgi-local/a_frameset.pl**

AAC "L" ITEM NSN 6525-01-166-9033

UA's: 1720, 1905, 3905, 4905, M305, M307, N305, 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$833.09

System Description: The regular and the jumbo mobile barriers can safely shield one or two persons. The updated stainless steel hardware provides the "look" to your discriminating healthcare designers and their health care staff. These models are available in 0.5 mm lead equivalence. This shield is idea for Operating Room Special Procedure Suites and Cardiac Catherization Labs. The stainless steel hardware mobile barriers are the perfect fit in any imaging room due to their 30 inch width and easy maneuverability.



Screen X-ray Mobile

CHARACTERISTICS

Dimensions	Height	72"
	Width	30"
	Length	2"
Window Dimensions	Height	24"
	Width	30"
Lead equivalent window pane	24" by 30"	.5 mm
Lead equivalent opaque panel	48" by 30"	Min .03 in (0.8mm)
Weight	110 lbs	
Cube	5.4 cu ft	
Storage Temperature:	N/A	
Operating Temperature	N/A	
Humidity (no condensing)	NONE	
Power Requirements	NONE	
Watts	NONE	

**COMPANY IS OUT OF BUSINESS
ITEMS ARE STILL IN STOCK**

SINK UNIT SURGICAL SCRUB TOC

**RAN-PAIGE CO INC
MODEL # SP0200-96-C-8509**

**AAC "W" ITEM NSN 6530-01-431-9005
AAC "J" ITEM NSN 6530-01-429-6715**

UA's: M301, M308, 4901, 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$946.74

Special Features: Portable and light weight. Consists of a hollow tubular frame support, a plastic polypropylene basin, a pump and a heater, a foot pedal and associated tubing and electrical components. Electrical and water are activated by the foot pedal. The water heater is an encapsulated inline type 1200 to 1300 Watts. The maximum water temperature is 125 degrees. This includes a reusable container.



CHARACTERISTICS

Dimensions	Height	N/A
	Width	N/A
	Depth	N/A
Weight	59 lbs	
Cubic ft	6.16	
Power Requirements	115/230 VAC, 50/60 Hz 1300 Watts	

STERILIZER SURGICAL INSTRUMENT W/CASE STEAM TOC

Distributed by: GOVERNMENT SCIENTIFIC SYSTEMS INC.

Manufactured by: TUTTNAUER USA CO.

MODEL # 2540M

Distributor's Phone: (703) 734-1805 FAX: (703) 734-1803

Manufacturer's Phone: (631) 737-4850 FAX: (631) 737-0720

Website: <http://www.govsci.com>

Website: <http://www.tuttnauer.com>

AAC "J" ITEM NSN 6530-01-531-4807


UA's: M302, M403, 4901, 4905, 4912

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$3,611.54

Systems Description: Tuttnauer manual autoclaves set the standard for steam Sterilization. The Tuttnauer manual autoclave is designed to compliment any healthcare and laboratory facility. Our basic manual autoclave will satisfy all of your sterilization needs. Time tested reliability and durability are built into every Tuttnauer product. The Tuttnauer M Series is also available in a quick cycle model. This sterilizer offers all the proven, dependable features of our manual autoclave, with the added benefit of reducing the total sterilization cycle time by 50%. Speed and reliability are accomplished without sacrificing load size. This is the perfect choice for quick instrument turn-around or a high-volume office.


Special Features: A fast Cycle Time .9 minutes from a hot start *(Standard Unwrapped Cycle time). Automatic shut off at the end of both the sterilization and dry cycles. A long life electro polished chamber and door. It has a double safety locking device that prevents the door from opening while chamber is pressurized. The drain valve is located on the front, allowing for a quick and easy draining of water reservoir. It has a dual safety thermostat to protect against overheating. This sterilizer is a table top steam autoclave; sterilization cycle and separate drying cycle feature automatic shut off. The size of the chamber is 10 inches by 18 inches deep

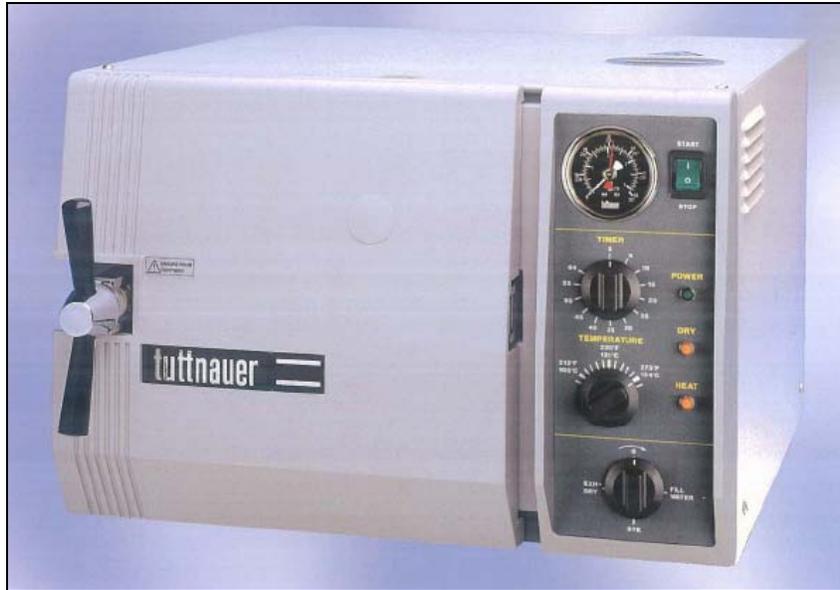

Hardened Case for the Tuttnauer Sterilizer



Sterilizer shown in Hardened Case

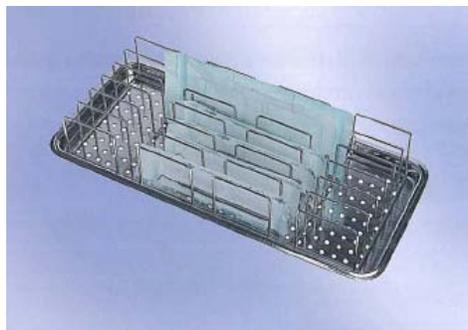

Instrument Pouch Rack

STERILIZER SURGICAL CHARACTERISTICS

Overall Dimensions		
	Height	14''
	Width	20''
	Depth	20''
Operating temp	59° to 95 ° F	
Storage temp	59° to 95° F	
Relative humidity	0 to 85%	
Chamber Dimensions		10'' diameter x18'' deep''
Weight	50 lbs	
Cube	19.55 cu ft	
Power Supply	120 voltage nominal 12 amp VAC 50/60 Hz	
Watts	1400 Watts	

STERILIZER SURGICAL DRESSING CONSUMABLES (START-UP)

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6530015408014	Included W/NSN	Pouch Rack	AR910	1	EA	\$43.79	\$43.79	GSS INC	Indef	N/A	2
6530015408023	Included W/NSN	Tray	CT620010	4	EA	\$65.55	\$65.55	GSS INC	Indef	N/A	2
6530015392908	Included W/NSN	Case, Hardened	HDD041805200	1	EA	\$851.65	\$851.65	GSS INC	Indef	N/A	2
7610015408195	Included W/NSN	Manual, Operator/Service	EMHC01.	1	EA	\$1.00	\$1.00	GSS INC	Indef	N/A	2
6550014849604	IN THE UA	Strips Sterilization	909556	2	240/ BX	\$18.50	\$37.00	J.A. WEBSTER	Indef	N/A	2

SUCTION APPARATUS SURGICAL PROG TOC

IMPACT INSTRUMENTATION INC

MODEL # 326M

Manufacturer's Phone: (973)-882-1212 FAX: (973)-882-4993

Website: <http://www.impactii.com>

AAC "W" ITEM NSN 6515-01-460-9174

AAC "J" ITEM NSN 6515-01-435-0050

UA's: M301, 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$1,600.00

System Description: The Model 326 is a multifunction, continuous and programmable intermittent suction unit. Built around Impact's ultra-lite[®] vacuum pump. The Model 326 may be used for oropharyngeal, tracheal, wound drainage, and abdominal or thoracic decompression procedures - short or long-term use. Its supplied accessories permit continuous use from AC or DC power, and internal rechargeable batteries provide power for several hours of transport or emergency backup.



IMPACT 326M



IMPACT 326M PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height	11.5"
	Width	9.5"
	Depth	4.87"
Weight	Analyzer	30 lbs, Unit 12 lbs
Operating Temperature		-4° F to 120° F
Humidity	Tested to level required for Air Worthiness	94±4%RH, 85° F±3.6° F (29.5°C±2°C) f/ 4 hrs.
Power Requirements		115/230 V AC, 50-400 HZ, 100 Watts, 2.5 Amps Steady State

IMPACT 326M CONSUMABLES & ACCESSORIES (START-UP)

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6515015096877	Included W/NSN	Assembly Auto Power Cable	708-0326-01	1	EA	\$20.21	\$20.21	IMPACT INSTRUMENTS	N/A	N	2
6515015117035	Included W/NSN	Suction Hose 6 ft. long, clear, sterile	820-0018-00	1	EA	\$3.36	\$3.36	IMPACT INSTRUMENTS	N/A	N	2
6515015117034	Included W/NSN	Hose, Clear, PVC 18" Long	540-0055-00	2	EA	\$2.16	\$4.22	IMPACT INSTRUMENTS	N/A	N	2
6515015117023	Included W/NSN	Hose, Clear, PVC, 1' Long	540-0068-00	1	EA	\$0.63	\$0.63	IMPACT INSTRUMENTS	N/A	N	2
6515015117017	Included W/NSN	Hose, Clear, PVC, 2' Long	540-0051-00	2	EA	\$2.51	\$4.02	IMPACT INSTRUMENTS	N/A	N	2
6515015043306	Included W/NSN	AC/DC Power Supply	703-0326-06	1	EA	\$232.88	\$232.88	IMPACT INSTRUMENTS	N/A	N	2
6515015098638	Included W/NSN	Universal Canister Bracket	334-0030-00	2	EA	\$27.77	\$55.54	IMPACT INSTRUMENTS	N/A	N	2
6515015039456	Included W/NSN	Collection Canisters, 1000cc Reusable	703-0326-07	2	EA	\$53.82	\$53.82	IMPACT INSTRUMENTS	N/A	N	2
6515015096967	Included W/NSN	Padded Case., 2 ea. Straps, Velcro	402-0017-00	1	EA	\$112.50	\$112.50	IMPACT INSTRUMENTS	N/A	N	2
6515015097331	Included W/NSN	Straps, Velcro	334-0020-00	2	EA	\$27.27	\$54.54	IMPACT INSTRUMENTS	N/A	N	2
6515015096977	Included W/NSN	Carry-All Case with Label	703-0326-16	1	EA	\$94.50	\$94.50	IMPACT INSTRUMENTS	N/A	N	2
6515011942187	Included W/NSN	Hydrophobic/Bacteriostatic Filters	465-0005-00	2	EA	\$9.45	\$18.90	IMPACT INSTRUMENTS	N/A	N	2
	Included W/NSN	Manual, Operation/Service	906-0326-03	2	EA	\$18.00	\$36.00	IMPACT INSTRUMENTS	N/A	N	2

IMPACT 326M CONSUMABLES & ACCESSORIES (RESUPPLY)

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6515014975761	TUBING, SUCTION	358388266148	12	EA	\$4.47	\$53.64	OWENS AND MINOR	N/A	N	2
6515011942187	FILTER DISPOSIBLE	465-0005-00	2	EA	\$8.28	\$49.68	IMPACT INSTRUMENTS	N/A	N	2
6515015039498	14FR. SUCTION CATHETER	820-0004-00	6	EA	\$1.58	\$9.48	IMPACT INSTRUMENTS	N/A	N	2
6515015039501	18FR. SUCTION CATHETER	820-0005-00	6	EA	\$1.58	\$9.48	IMPACT INSTRUMENTS	N/A	N	2
6515014493193	1200CC DISPOSABLE JAR	410-0004-10	1	10 PK	\$36.90	\$36.90	IMPACT INSTRUMENTS	N/A	N	2
6515014862077	CANISTER ASSY SUCT SURG PLASTIC 2000CC	494410	2	48/EA	\$205.00	\$410.00	MEDLINE INDUSTRIES INC	N/A	N	2
6515014441638	SUCTION AND IRRIGATION ASSEMBLY SURGICAL	207-559	6	PG	\$335.00	\$2,010.00	STRYKER CORP	N/A	N	2
6515012774772	TUBING SURGICAL 100FT	SIA8-230201	1	RO	\$11.00	\$11.00	Emery Medical Supply	N/A	N	2
6515015117034	Hose, Clear, PVC 18" Long	540-0055-00	2	EA	\$2.16	\$4.22	IMPACT INSTRUMENTS	N/A	N	2
6515015117023	Hose, Clear, PVC, 1' Long	540-0068-00	1	EA	\$0.63	\$0.63	IMPACT INSTRUMENTS	N/A	N	2
6515015117017	Hose, Clear, PVC, 2' Long	540-0051-00	2	EA	\$2.51	\$4.02	IMPACT INSTRUMENTS	N/A	N	2
6515015043306	AC/DC Power Supply	703-0326-06	1	EA	\$232.88	\$232.88	IMPACT INSTRUMENTS	N/A	N	2
6515015098638	Universal Canister Bracket	334-0030-00	2	EA	\$27.77	\$55.54	IMPACT INSTRUMENTS	N/A	N	2
6515015039456	Collection Canisters, 1000cc Reusable	703-0326-07	2	EA	\$53.82	\$53.82	IMPACT INSTRUMENTS	N/A	N	2
6515011942187	Hydrophobic/Bacteriostatic Filters	465-0005-00	2	EA	\$9.45	\$18.90	IMPACT INSTRUMENTS	N/A	N	2
6515015039456	REUSABLE COLLECTION JAR ASSEMBLY	703-0326-07	1	EA	\$53.82	\$53.82	IMPACT INSTRUMENTS	N/A	N	2
6515015117035	TUBE SUCTION SURGICAL 6 ft	820-0018-00	12	EA	\$2.70	\$2.70	IMPACT INSTRUMENTS	N/A	N	2

TABLE OPERATING FIELD TOC

**ARIZONA INDUSTRIES FOR THE BLIND
MODEL # 100066**

Manufacturer's PHONE: (602) 269-5131 FAX: (602) 269-9462

Website: <http://www.de.state.az.us/aib/>

AAC "J" NSN 6530-01-321-5592

LIN: T00578

UA's: 0267, 2267, M316, 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$6,403.38



INTRODUCTION

The field operating table is manufactured by Arizona Industries for the blind at 3013 W Lincoln street Phoenix, AZ 85009-5699 Phone: (602) 269-5131 FAX: (602) 269-9462, the current cost for the unit is \$5,586.00 it is an AAC-L item and carries a LIN: T00578.

The field operating table is a portable type that is quickly assembled and is used for surgical procedures in the far forward operations, the table contains 2 adjustable 100 watt halogen surgical lights, there is no patient transfer required, patient remains on a litter that rests on the top of two rail assemblies.

The components are easily detached as needed from the table, the table measures 53 inches in length, 26 inches wide and 25 to 33 inches working height when assembled, the unit weight when unpacked from the container is 80 pounds, also the table is capable of using all military litters.

COMPONENT LIST

The OR table is issued with the following items:

QTY	ITEM DESCRIPTION	NSN
2	Right corner leg assemblies	6530-01-455-7585
2	Left corner leg assemblies	6530-01-455-7387
8	Extrusion bars	6530-01-455-7634
4	Rail assemblies	6530-01-455-7638
2	Mesh shelf assemblies	6530-01-453-9076
1	Vinyl drain pad	6530-01453-7698
2	Litter rails	6530-01-455-7642
1	Bag frame	6530-01-455-7646
1	Weld tray assembly	6530-010455-7653
2	Clamp assemblies	6530-01-455-7657
1	Tray clamp assembly	6530-01-455-7907
1	Support posts	6530-01-455-7662
1	Tray post	6530-01-455-7685
1	Guide weldment	6530-01-455-7690
2	Armboard assemblies	6530-01-453-7696
1	Tray-stand assembly	6530-01-455-7692
1	Tray instrument	6530-00-793-9570
2	Arm assemblies	6530-01-455-7695
3	IV poles	6530-01-455-7860
2	Strap assemblies	6530-01-455-7865
2	Halogen Lamp assemblies (surgical lights)	6240-01-455-7873
2	Wrenches for adjustment of the surgical lights	5120-01-455-7901
3	Lights (spare bulbs)	6240-01-463-7057
1	Reusable container	6530-01-432-3173

CHARACTERISTICS

Dimensions	Height .	33"
	Width	26"
	Depth	53"
Weight		80 lbs
Storage Temperature		-35° to 160°F
Operating Temperature		-35° to 160°F
Humidity (non-condensing)		5-95%
Power Requirements	120/230 volts, .625 amps	75 Watts



ASSEMBLY INSTRUCTIONS

The step by step instructions are provided to assist in assembly, part identification, and repackaging of the table back into the reusable storage container. To prepare the table for assembly do the following:

1. Open the storage container and remove the top tray and center tray from the container.
2. Complete an inventory of the Operating Table components.
3. Remove all of the components from the storage container.
4. During the removal of the Operating Table components inspect each item for damage.
5. When removing the Surgical Light assemblies use caution not to lay them where they could accidentally be knocked off and get damaged.

(NOTE)

Be very careful when handling the Surgical Lights if dropped there is a possibility that the circuit board in the arm assembly could get damaged.

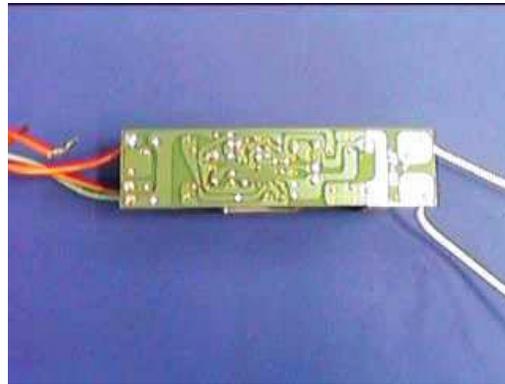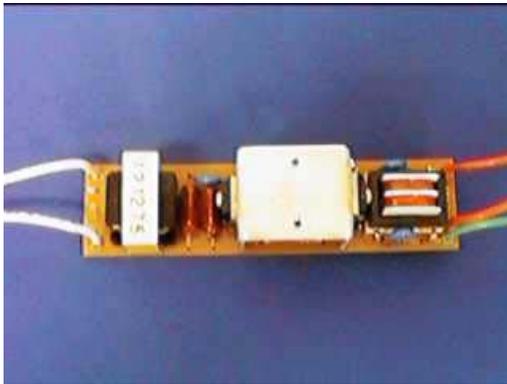

**The circuit board is located in the arm assembly of the surgical light.
JT 101 Circuit Board**

To assemble and set up the operating table follow the instructions beginning on the next page.

ASSEMBLY INSTRUCTIONS

Step 1: Obtain the 4 OR table legs.



Step 2: Obtain 4 of the short connecting rails.



Step 3: Attach the 4 short connecting rails to the end side of the table legs.



Step 4: Obtain the 4 remaining short connecting rails and the 4 long connecting rails.



Step 5: Connect the 4 long and the 4 short connecting rails together making 4 single long connecting rails.



Step 6: Attach the lower mesh shelf to the lower connecting rails.



Step 7: Attach the upper and lower connecting rails to the legs one end at a time.



Step 8: Attach the connecting bars to the remaining legs and the lower mesh shelf Velcro on each end of the OR table.



Step 9: Attach the drain pad to the upper connecting bars of the OR table.




Step 10: Attach the stretcher rails to the OR table.




Step 11: Attach the 2 clamps to the OR table side connecting bar.



Step 12: Obtain the 2 silver support posts and place into the 2 clamps.

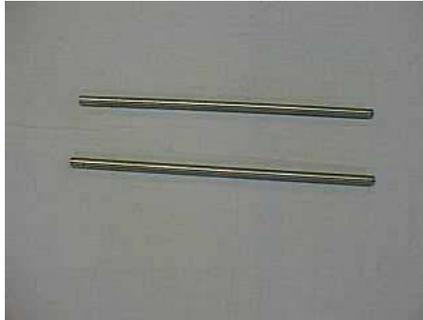

Step 13: Obtain the arm board assemblies and place onto the support posts.

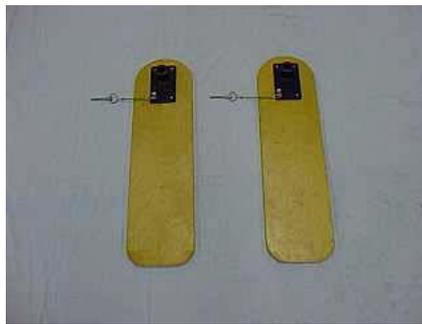


****Upon completion of steps 11, 12, and 13 the OR table should appear as below.**



Step 14: Obtain the tray clamp assembly and attach to the OR table upper rail on the opposite end of the arm boards.



Step 15: Obtain the tray post and insert into the clamp.

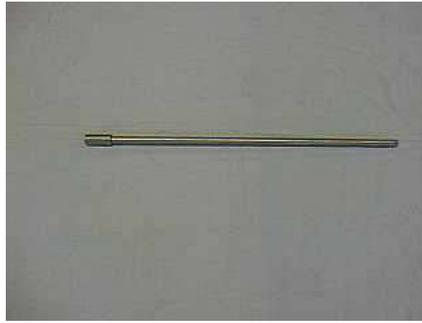

Step 16: Obtain the tray stand assembly and position onto the tray post.




Step 17: Obtain the tray and place on top of the tray stand assembly.



****The OR table should appear as below at this point of assembly.**



Step 18: Obtain the two arm assemblies and place into the end OR table upper legs.

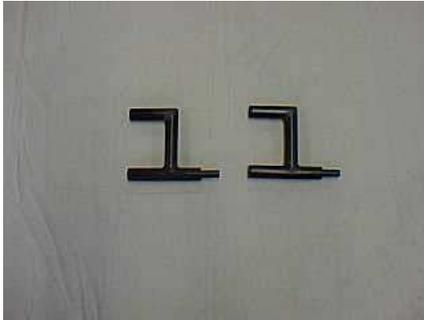

Step 19: Obtain the IV poles and insert into the arm assembly.




Step 20: Obtain the surgical lights and insert into the arm assembly



****At this point the OR table should appear as below.**



Step 21: Obtain the bag frame assembly and attach to the end of the OR table.

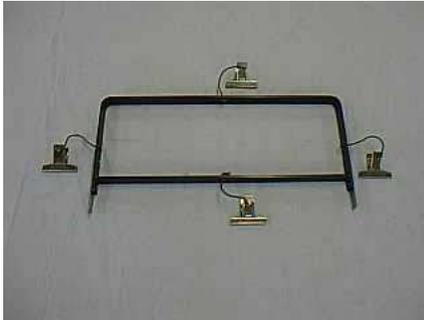

Step 22: Obtain the tray assembly and insert onto the OR table end.



****This completes the OR table set up. The OR table should appear as below.**



TABLE OPERATING FIELD ACCESSORIES (START-UP)

NSN	Notes	Nomenclature	QTY	UI	PART #	Unit Price	Total Price	MFG	Refrig Y/N	CONUS Ship Time, weeks
6530014557585	INCL W/NSN	Corner ® Assembly	2	EA	40212	\$633.20	\$1266.40	Arizona Industries	N	
6530014557387	INCL W/NSN	Corner (L) Assembly	2	EA	40213	\$631.52	\$1263.04	Arizona Industries	N	
6530014557634	INCL W/NSN	23.62 Extrusion	8	EA	30373	\$21.28	\$170.24	Arizona Industries	N	
6530014557638	INCL W/NSN	Rail Assembly	4	EA	40217	\$100.04	\$400.16	Arizona Industries	N	
6530014539076	INCL W/NSN	Shelf	2	EA	60157	\$60.52	\$121.04	Arizona Industries	N	
6530014557642	INCL W/NSN	Rail Assembly	2	EA	30381	\$116.00	\$232.00	Arizona Industries	N	
6530014557646	INCL W/NSN	Bag Frame	1	EA	30393	\$88.00	\$88.00	Arizona Industries	N	
6530014557653	INCL W/NSN	Tray Assembly (weld)	1	EA	30392	\$206.00	\$412.00	Arizona Industries	N	
6530014557657	INCL W/NSN	Clamp Assembly	2	EA	40220	\$352.22	\$704.44	Arizona Industries	N	
6530014557907	INCL W/NSN	Tray Clamp Assembly	1	EA	40221	\$435.64	\$435.64	Arizona Industries	N	
6530014557662	INCL W/NSN	Support Post	2	EA	30354	\$35.72	\$71.44	Arizona Industries	N	
6530014557685	INCL W/NSN	Tray Post	1	EA	30391	\$97.20	\$97.20	Arizona Industries	N	
6530014557690	INCL W/NSN	Guide Weldment	1	EA	30388	\$68.48	\$68.48	Arizona Industries	N	
6530014537696	INCL W/NSN	Armboard Assembly	2	EA	40218	\$154.68	\$309.36	Arizona Industries	N	
6530014557692	INCL W/NSN	Tray Stand Assembly	1	EA	40219	\$138.64	\$138.64	Arizona Industries	N	
6530007939570	INCL W/NSN	Tray Instrument	1	EA	RRT00 636	\$113.24	\$113.24	Arizona Industries	N	
6530014557695	INCL W/NSN	Arm Assembly	2	EA	30379	\$82.28	\$164.56	Arizona Industries	N	
6530014557860	INCL W/NSN	IV Pole	3	EA	40222	\$161.64	\$484.92	Arizona Industries	N	
6530014557865	INCL W/NSN	Strap	2	EA	30394	\$6.48	\$12.96	Arizona Industries	N	
6240014557873	INCL W/NSN	Halogen Lamps	2	EA	HAL- A-L- 103-A	\$696.08	\$1392.16	Arizona Industries	N	
6240014637057	INCL W/NSN	Lamp Bulb	2	EA	6445D AX	\$32.00	\$64.00	Arizona Industries	N	
6530014537698	INCL W/NSN	DRAIN PAD	1	EA	60167	\$209.84	\$209.84	Arizona Industries	N	
6530014323173	INCL W/NSN	Container, Storage	1	EA	AL4024 -1305- 10130- 200	\$2066.00	\$2066.00	Arizona Industries	N	

COMPONENT DESCRIPTIONS

Corner (R) Assembly
2 each, Part Number 40212
NSN: 6530-01-455-7585



Corner (L) Assembly
2 each, Part Number 40213
NSN: 6530-01-455-7387



23.62 Extrusion
8 each, Part Number: 30373
NSN:6530-01-455-7634



Rail Assembly
4 each, Part Number: 40217
NSN: 6530-01-455-7638




Shelf

**2 each, Part Number: 60157
NSN: 6530-01-453-9076**



Rail Assembly

**2 each, Part Number: 30381
NSN: 6530-01-455-7642**

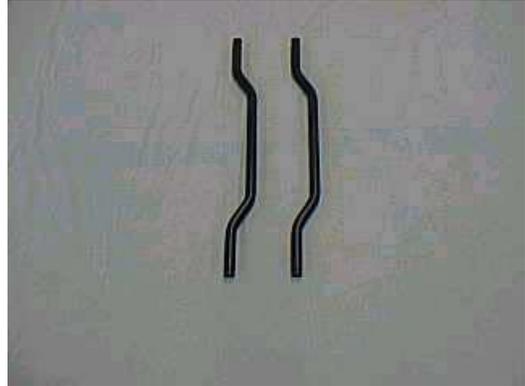

Bag Frame

**1 each, Part Number: 30393
NSN: 6530-01-455-7646**



Tray Assembly (weld)

**1 each, part Number: 30392
NSN: 6530-01-455-7653**



Clamp assembly

**2 each, Part Number: 40220
NSN:6530-01-455-7657**




Tray Clamp Assembly


**1 each, Part Number: 40221
NSN:6530-01-455-7907**



Support Post
2 each, Part Number: 30354
NSN: 6530-01-455-7662

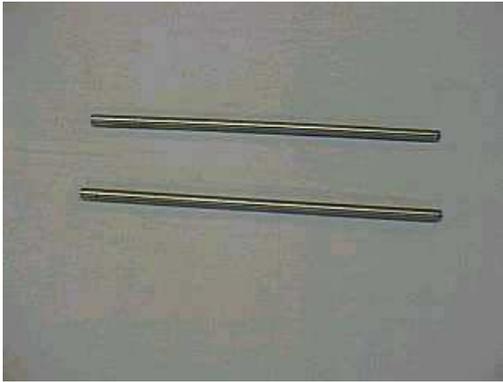


Tray Post
1 each, Part Number: 30391
NSN: 6530-01-455-7685

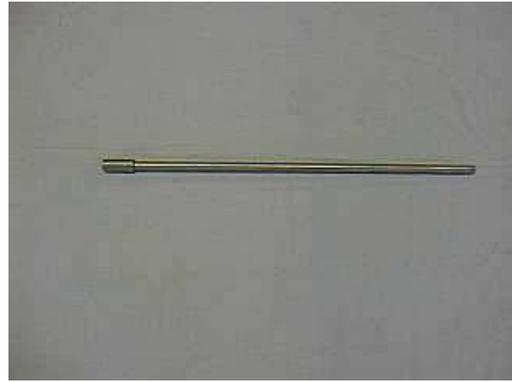

Guide Weldment
1 each, Part Number: 30388
NSN: 6530-01-455-7690



Armboard Assembly
2 each, Part Number: 40218
NSN: 6530-01-453-7696

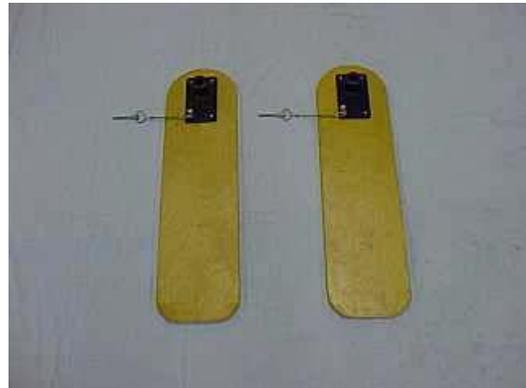


Tray Stand Assembly
1 each, Part Number: 40219
NSN: 6530-01-455-7692



Tray Instrument
1 each, Part Number: 9570
NSN: 6530-00-793-9570



Arm Assembly
2 each, Part Number: 30379
NSN: 6530-01-455-7695

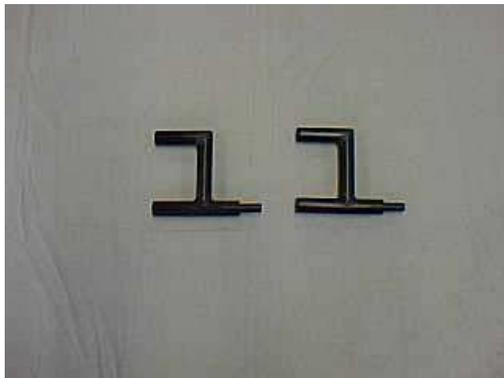

IV Pole
3 each, Part Number: 40222
NSN: 6530-01-455-7860



Strap
2 each, Part Number: 30394
NSN: 6530-01-455-7865



Halogen Lamps
2 each, Part Number: 64450AX
NSN: 6240-01-455-7873



Wrench
2 each, Part Number: 20404
NSN:5120-01-455-7901



Lamp Bulb
2 each, Part number: 75W/12V-GY6.35
NSN: 6240-01-463-7057



Drain Pad
1 each, Part Number: 60167
NSN: 6530-01453-7698



The Storage Container NSN: 6530-01-432-3173

The table when disassembled stores into a reusable carrying container that weighs approximately 200 pounds when packed. The cost of the storage container is \$1098.00.



STORAGE CONTAINER



TOP TRAY



CENTER TRAY



BOTTOM BASE CUSHION



The container has custom made inserts to cushion the components and accessories of the operating table and should not be removed.

NOTE


(This is a Custom made Storage Container for the storage of the operating table only).

DISASSEMBLY AND REPACKING INSTRUCTIONS

To disassemble the operating table reverse the order in which the table was assembled. Again, exercise care to ensure that fragile components are not damaged as the table is disassembled. Before inserting the components of the table back into the case make sure that each component is thoroughly cleaned.

Note that the case is manufactured with trays each having inserts for each component of the table built directly into them. By replacing the components into the proper insert each will be protected during transport. Beginning on the next page are illustrations of each tray indicating exactly where each component is to be inserted so that maximum protection for each item is provided.


TOP TRAY LAYOUT

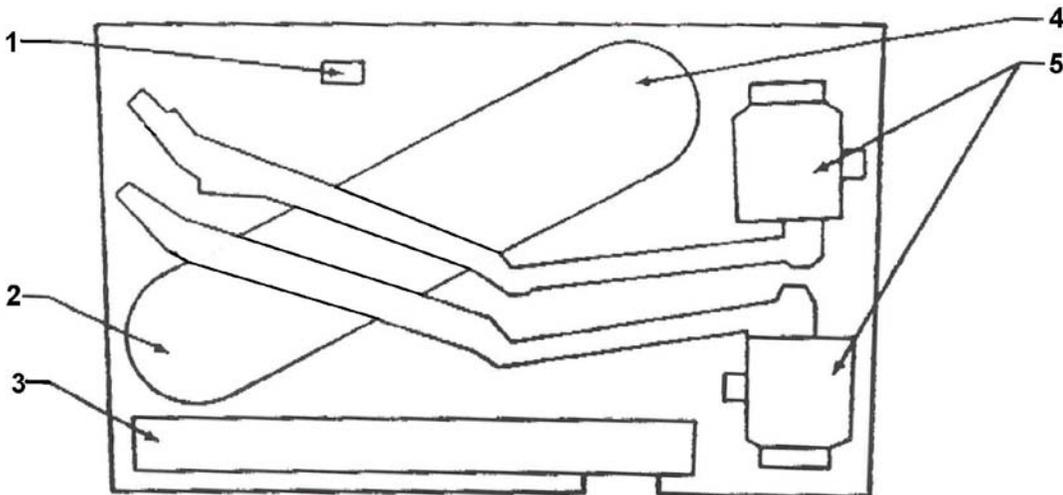

Item No.	Description
1	Bulbs
2 ¹	Shelf
3	Rail Assembly
4	Armboard Assembly
5	Lights, Reynolds Mach and Tool , Melrose, IL 60160

¹Note that item #2 is in the tray insert beneath item #4


CENTER TRAY LAYOUT

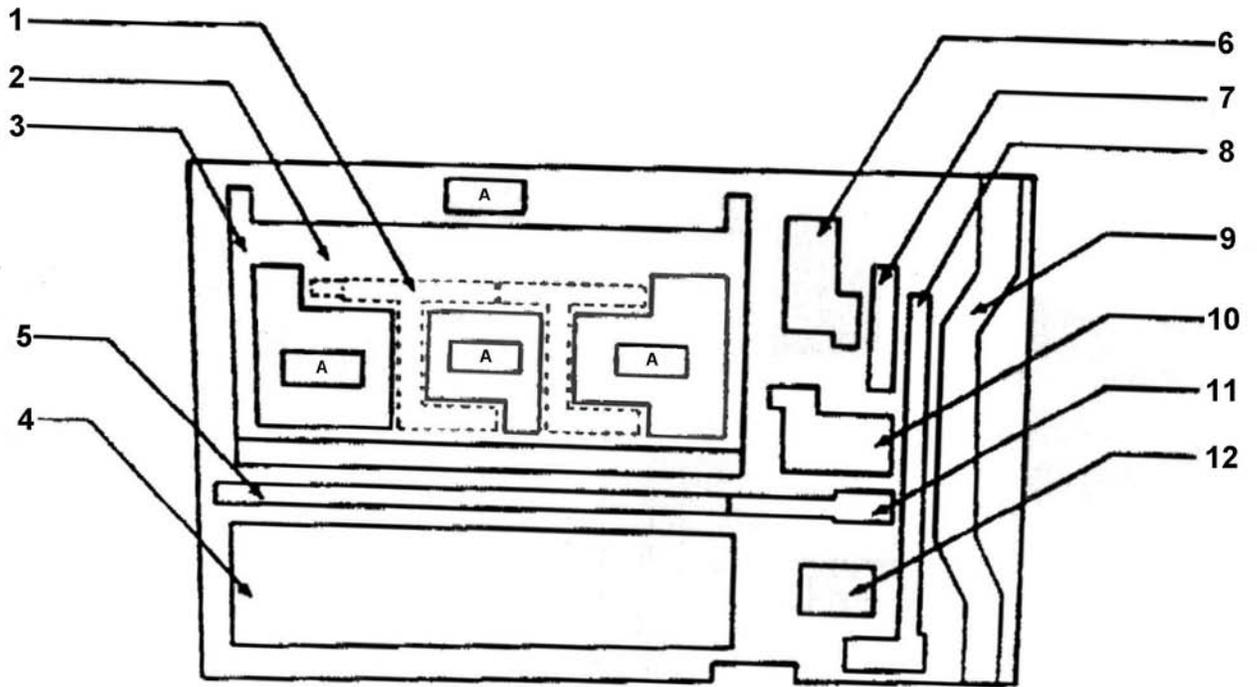

Item No.	Description
1	Arm Assembly
2	Tray Assembly
3	Bag Frame Assembly
4	20.62 Extrusion
5 ¹	Support Post
6	Clamp Assembly
7	Wrench
8	Guide Weldment
9	Rail
10	Clamp Assembly
11	Tray Post
12	Straps
A	A clamp fits into each insert marked with an "A"

¹Note that items 5 and 11 fit into the same insert

BOTTOM CUSHION INSERT LAYOUT

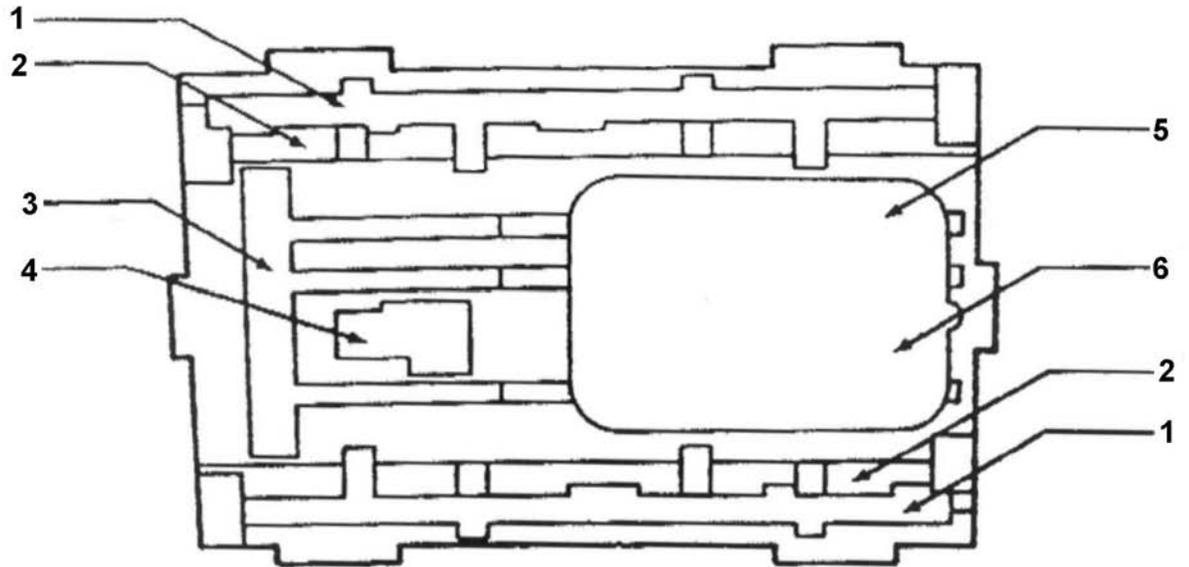

Item No.	Description
1	Corner Assembly, Right Side
2	Corner Assembly, Left side
3	I.V. Poles, 3 each
4	Tray Clamp Assembly
5	Tray Stand Assembly
6	Tray, NSN 6530-00-793-9570

ULTRASOUND, PORTABLE 180 SONOSITE SYSTEM TOC

SONOSITE, INC
MODEL 180Plus

Manufacturer's PHONE: (425) 951-1243 FAX (801) 751-1135

Website: <http://www.sonosite.com/content/view/37/185/>

AAC "W" ITEM NSN 6525-01-507-0073

AAC "J" ITEM NSN 6525-01-503-7182

UA's: 2267, 4901, 4905, 5267

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

PRICE: 36,462.98

System Description: Lightweight portable diagnostic ultrasound device used to assist in the detection of Rapid triage and assessment of trauma (FAST), visualization of abdominal fluid collection, evaluation of pericardial or pleural effusions and tamponade, immediate assessment of pelvic pain and abnormal uterine bleeding, rapid evaluation of acute abdominal pain (kidney, cholelithiasis), and easy emergency obstetric exams (IUP, fetal viability)

Operator Familiarization: CD-ROM is available.

CLINICAL APPLICATIONS

Abdominal
Vascular
Breast
Obstetrical
Pediatric/Neonatal
Intraoperative Procedures
Interventional Procedures
Cardiac
Prostate
Small Parts
Gynecological
Musculoskeletal



ULTRASOUND PHYSICAL AND ENVIRONMENTAL SPECIFICATION


Dimensions	Height	13.3 inches	
	Width	7.6 inches	
	Depth	2.5 inches	
	Cube	0.14cuft	
Weight		5.4 lbs	
Power Requirements		12 VDC or 120 VAC	
Battery Life		1.5hrs – 4.0hrs fully charged	
Battery characteristics		Lithium Ion	




MENU SELECT CONTROLS FIGURE 1



NEAR/FAR/GAIN AJUSTORS FIGURE 2

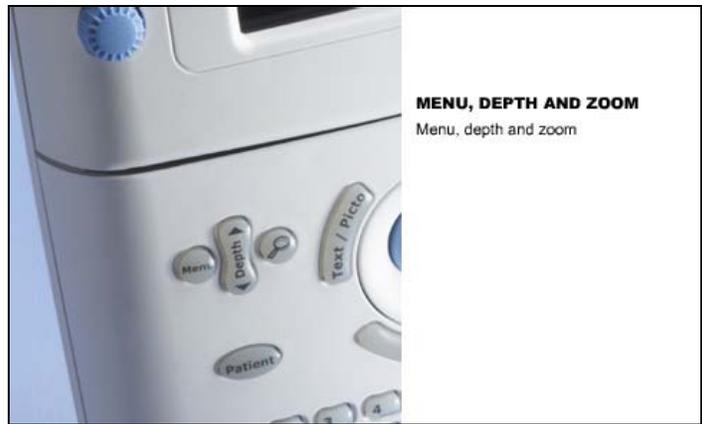

MENU, DEPTH AND ZOOM FIGURE 3

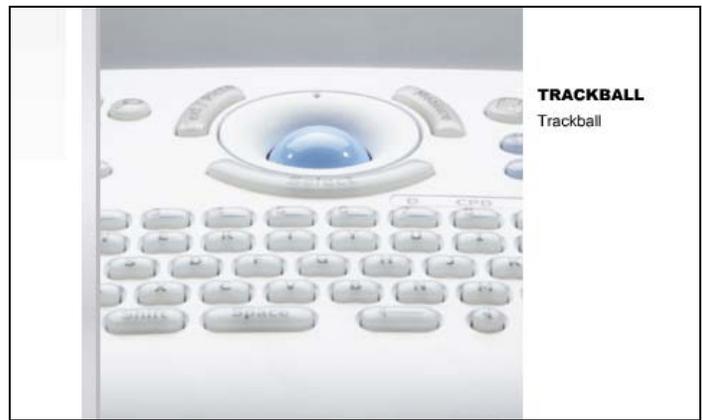

TRACKBALL FIGURE 4



PATIENT
Patient Button

PATIENT BUTTON FIGURE 5




ARROW AND FREEZE KEYS
Cine Arrow and Freeze keys

ARROW AND FREEZE KEYS FIGURE 6



LCD CONTROLS
Brightness and Contrast Controls

LCD CONTROLS FIGURE 7

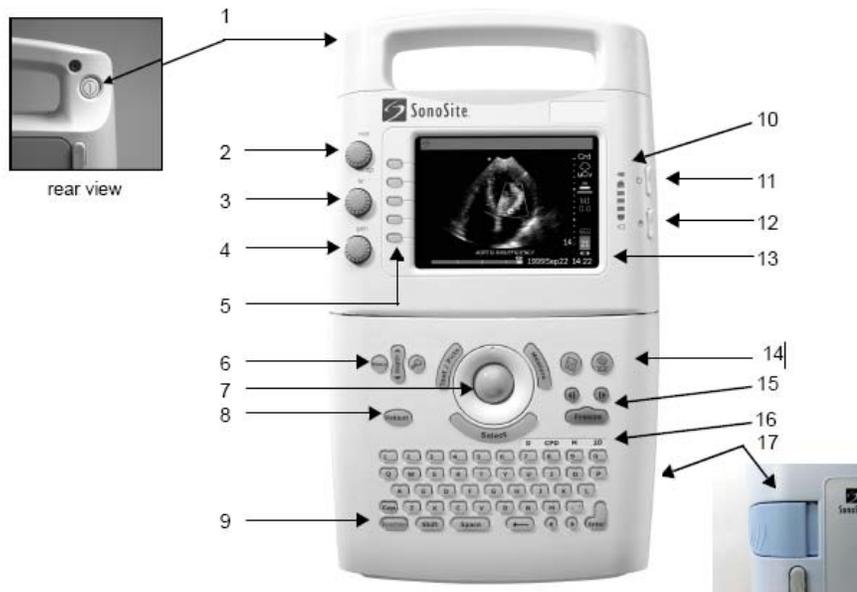

Number	Feature	Number	Feature
1	power switch, located on the rear of the system handle	10	battery charge indicators
2	near, affects gain of shallow echoes	11	LCD (liquid crystal display) brightness control
3	far, affects gain of deeper echoes	12	LCD contrast control
4	gain, affects overall gain	13	LCD
5	menu select controls	14	Print/VCR or Print key
6	Menu, Depth, and Zoom	15	Cine Arrow keys and Freeze key
7	trackball	16	mode controls
8	Patient	17	battery release
9	Function key		

ULTRASOUND CONSUMABLES AND ACCESSORIES

Package Order for FST and Vet Sets only

Hand-Carried Ultrasound Systems:		PART NO.	PRICE	QTY
Transducers (C1 products):	NOTE: Transducers on this price list have the current version software and the existing customer system may require an update to ensure transducer compatibility.			
SonoSite 180 PLUS & ELITE Fourth Generation (1.99)	Portable ultrasound system includes: display module, 2D Grayscale, color power Doppler (CPD) and directional color power Doppler (DCPD) capability, M-mode, PC Direct connectivity capability (w/ SiteLink & PC Direct Serial Cable ordered separately). Also includes battery, universal AC power supply, external video and printer cables, ultrasound gel, and user guides.			
	180PLUS Does not support Continuous Wave (CW) Doppler.	L02464	\$8036.00	1
C15 e / 4–2, micro-curved array transducer	15–mm, broadband (4 - 2 MHz) micro-curved array for thoracic and abdominal applications. Provides 2D Grayscale, CPD or DCPD (depending on exam type), CW, PW, M-mode, and ERH. 5.5 ft (1.7m) cable and pinless connector. Not compatible with non-1.99 systems.	P02461	\$8610.00	1
C60 / 5–2, curved array transducer	60-mm, broadband (5 - 2 MHz) curved array for abdominal, obstetric, and gynecologic applications. Provides 2D Grayscale, CPD, DCPD, PW, M-mode, and THI. 5 ft (1.5 m) cable and pinless connector. Compatible with biopsy guide part number P01882. Some early first generation SonoSite systems (1.5X with ARM < 02.80.006.014) require system software upgrade module (no charge) to ensure compatibility. Contact SonoSite Customer Support prior to ordering for additional details.	P02115	\$4510.00	1
L38 / 10-5, linear array transducer	38-mm, broadband (10 - 5MHz) linear array for breast, small parts, vascular, and musculoskeletal applications. Provides 2D Grayscale, CPD, PW, and M-mode. 5.5 ft. (1.7 m) cable and pinless connector. Compatible with biopsy guide part number P01300. Not compatible with 1 st generation systems.	P04101	\$8610.00	1

ICT / 7-4, intracavitary array transducer	11-mm, broadband (7 - 4 MHz) intracavitary array for gynecologic, obstetric and urologic applications. Provides 2D Grayscale, CPD, PW, and M-mode. 5 ft (1.5m) cable and pinless connector. Compatible with biopsy guide part number P01869. Not compatible with 1 st generation systems.	P02450	\$4510.00	1
Battery – PLUS/ELITE	11.1 volt, 3.0 amp-hour rechargeable lithium-ion battery.	P00049	\$324	1
SiteCharge® dual battery charger	Desktop charger used to recharge two system batteries at a time. Recommended for heavy battery use environments.	L00552	\$492	
Sonosite Military Hard Case		P03808	\$656.00	

180 PLUS RESUPPLY CONSUMABLES

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, mont hs	Refrig Y/N	CONUS Ship Time, weeks
6515015046163	Latex Probe Cover	610-214	1	50/ PG	\$156.00	\$156.00	Civco Medical Instruments	N	N	2
6515012317249	Transmission Gel Ultrasound0.25 liter	01-08	1	12s/PG	\$31.84	\$31.84	Parker Labs Inc.	N	N	2

3.5 x 20cm Latex Covers

These latex transducer covers are individually packaged with colored elastic bands in easy-to-open perforated bags. Conveniently packaged in a compact box, the covers offer an effective means to protect equipment, patients and professionals from the risks of cross-contamination.

REF. #	Product Description	Qty.
610-214	Sterile 3.5 x 20cm (1.4" x 7.9") latex cover	50
610-010	Non-sterile 3.5 x 20cm (1.4" x 7.9") latex cover	50



180 PLUS ACCESSORY START-UP

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
	Included W/NSN	SONOSITE 180 PLUS	P02522	1	EA	\$8036.00	\$8036.00	SONOSITE	N	N	3
6525015023728	Included W/NSN	C15 e / 4-2, micro-curved array transducer	P02461	1	EA	\$8610.00	\$8610.00	SONOSITE	N	N	3
6525015023739	Included W/NSN	C60 / 5-2, curved array transducer	P02115	1	EA	\$4510.00	\$4510.00	SONOSITE	N	N	3
6525015036742	Included W/NSN	L38 / 10-5, linear array transducer	P04101	1	EA	\$8610.00	\$8610.00	SONOSITE	N	N	3
6525015023739	Included W/NSN	ICT / 7-4, intracavitary array transducer	P02450	1	EA	\$4510.00	\$4510.00	SONOSITE	N	N	3
6525014983603	Included W/NSN	Battery – PLUS/ELITE	P00049	2	EA	\$324.00	\$648.00	SONOSITE	N	N	3
6130014902678	Included W/NSN	SiteChargedual battery charger	L00552	1	EA	\$492.00	\$492.00	SONOSITE	N	N	3
6515015219530	Included W/NSN	Sonosite Military Hard Case	L03808	1	EA	\$820.00	\$820.00	SONOSITE	N	N	3
See Resupply	Included W/NSN	Transmission Gel Ultrasound0.25 liter	01-08	1	EA			Parker Labs Inc.	N	N	3
7610015436723	Included W/NSN	C1.99 PLUS and ELITE ultrasound system Service Manual	P02913	2	EA	\$28.70	\$57.40	SONOSITE	N	N	3
7610015437003	Included W/NSN	Sonosite Ultrasound System Users Guide	P02614	2	EA	\$28.70	\$57.40	SONOSITE	N	N	3
NO NSN Required	Included W/NSN	Sonosite Ultrasound System Quick Reference Guide	P02813	1	EA	\$20.50	\$20.50	SONOSITE	N	N	3
Not Sold Seperately	Included W/NSN	Sonosite Ultrasound System User Guide Supplement	P05020	1	EA			SONOSITE	N	N	3
Not Sold Seperately	Included W/NSN	Sonosite Imaging Accessory Manual		1	EA			SONOSITE	N	N	3
Not Sold Seperately	Included W/NSN	Medical Ultrasound Safety Manual	P00809	1	EA			SONOSITE	N	N	3
	Included W/NSN	Power Cord	P00848	2	EA	\$16.40	\$32.80	SONOSITE	N	N	3
6525015131550	Included W/NSN	Power Supply, 85-264 VAC, 50/60 Hz, 16VDC 45 Watts	L00538	2	EA	\$77.90	\$155.80	SONOSITE	N	N	3
NO NSN Required	Included W/NSN	Cable Printer, Control	P00537	1	EA	\$24.60	\$24.60	SONOSITE	N	N	3
NO NSN Required	Included W/NSN	Cable, RCA/BNC, Video	P00536	1	EA	\$28.70	\$28.70	SONOSITE	N	N	3
6515015084541	Included W/NSN	Cable, Serial, PC Direct	P02046	1	EA	\$82.00	\$82.00	SONOSITE	N	N	3



**SONOSITE, ULTRASOUND MODEL 180Plus
WITH HARDENED CASE**

A full line of broadband transducers

SonoSite manufactures a variety of high-quality broadband transducers. They are lightweight, ergonomically designed for optimal user comfort, rugged and feature rapid, pinless connectors.



L38/10-5

38-mm broadband
linear array



Clinical Applications

- Small parts imaging: thyroid, testicular, and musculoskeletal
- Breast
- Vascular

Ultrasound guided procedures:

Line placements, biopsies, drainage procedures

Imaging Modes:

2D, M-mode, Color Power Doppler, Pulsed Wave Doppler (option)

Physical Characteristics

Frequency: broadband 10-5 MHz

Maximum Depth: 7 cm

Maximum Field of View: 38 mm

Aperture: 38 mm

Biopsy guide:

for 14-23 gauge needles with depth range from 0.7-3.4 cm

C15/4-2

15-mm broadband
array transducer



Clinical Applications

- Adult cardiac
- General-purpose abdominal
- Trauma Assessment (F.A.S.T. exam)
- General Imaging: abdominal and thoracic

Imaging Modes:

2D, M-mode, Color Power Doppler, PowerMap Directional Color Power Doppler in cardiac settings, Pulsed Wave Doppler (option), Tissue Harmonic Imaging (option)

Physical Characteristics

Frequency: broadband 4-2 MHz

Maximum Depth: 24.6 cm

Maximum Field of View: 101°

C60/5-2

60-mm broadband curved array



Clinical Applications

- General-purpose abdominal
- Obstetric
- Gynecologic

Imaging Modes:

2D, M-mode, Color Power Doppler, PowerMap Directional Color Power Doppler, Pulsed Wave Doppler (option), Tissue Harmonic Imaging (option)

Physical Characteristics

Frequency: broadband 5-2 MHz
Maximum Depth: 22 cm
Maximum Field of View: 57°

ICT/7-4

11-mm broadband intercavitary array



Clinical Applications

- Gynecologic
- Obstetric
- Urologic

Ultrasound Guided Procedures:

Tissue sample retrieval

Imaging Modes:

2D, M-mode, Color Power Doppler, Pulsed Wave Doppler, Pulsed Wave Doppler (optional)

Physical Characteristics

Frequency: broadband 7-4 MHz
Maximum Depth: 10.4 cm
Maximum Field of View: 135°

Biopsy Guide:

for 16-18 gauge needles with depth range from 0.5-7.0 cm

**X-RAY APPARATUS RADIOGRAPHIC MINI X-RAY TOC
HF PTBL W/16" WHEELS**

**MINXRAY INCORPORATED
MODEL #: MINXRAY HF 120/60H POWER PLUS
Manufacturer's Phone: (847) 564-0323 FAX: (847) 564-9040
Website: <http://www.minxray.com/Military.html>**

**AAC "W" ITEM NSN 6525-01-488-4722
AAC "J" ITEM NSN 6525-01-523-1989**

UA N334, 4905

USAMMA POC: Customer Relations Management 301-619-4301/4316, DSN 343-4301/4316

UNIT PRICE: \$21,657.60

System Description: The Minxray portable medical x-ray system package is a new standard for field deployable and battlefield portable diagnostic radiography. This system consists of Model HF120/60HPPWV PowerPlus high frequency portable x-ray unit, the Model XGSMKIVLW gas spring portable mobile stand with sixteen (16") wheels, and the Model HF100HSTC Hardigg mil spec system transport case.

Special Features:

- The HF120/60HPPWV PowerPlus produces 40-120kVDC and over 200 mAs. This unique High Burst design enables output between 60-20 mA, even when used with 120 VAC input. This x-ray unit can be used worldwide with any voltage input between 100 VAC and 260 VAC, 50/60 Hz.
- The XGSMKIVLW stand offers a unique design that converts within seconds between its folded, two-shelled transport mode and a fully functional x-ray stand. The x-ray unit can be easily positioned for any view with both ambulatory and non-ambulatory patients.
- The entire x-ray system of x-ray unit and stand weighs 96.5 lbs. (43.8 kg) and is compatible with digital and analog imaging media.
- The MinXray's unit features wave rectified, high frequency electronic platforms and possess the highest power-to-weight ratios available.

This unit also features five (5) memory stations to store and easily recall frequently used exposure techniques. This system has the ability to switch between mAs and actual exposure time. The collimator can be rotated by the technician so that any shot can be properly oriented. The most power available in a portable x-ray unit.



**GAS SPRING MOBILE STAND WITH
16 INCH WHEELS, XGSMKIVLW**

CHARACTERISTICS

Tube head Dimensions		16"L x 8.8"W x 9.5"H (40.6cm x 22.4 cm x 23.9 cm)
Hardigg Case		61"L x 27"W x 33"H (1.6 M x 0.7 M x 0.8M)
Weight (System & Stand)		96.5 lbs (43.8 kg)
Weight (Hardigg Case Sys)		221.5 lbs (100.6 kg)
Unit Pack Cube		10.0 cubic ft
X-Ray Tube		Superior SXR-130-15-1.2
Focal Point		1.2 mm
Anode Heat Storage		65 KHU
Total Filtration incl. Collimator		3.2 mm Al equivalent
Frequency		80 KHz
Line Voltage		100-260 VAC, 50/80 Hz
Fuse Rating		30A
Electrical Consumption		19A @ 120 V; 9A @ 230V
Maximum Consumption		3.5 Kva+/-10%
Watts		2,280 @ 120V, 2070 @230V



**HIGH FREQUENCY X-
RAY UNIT
HF120/60HPPWV**



**RADIOGRAPHIC
IMAGE**



**HARDIGG MIL SPEC SYSTEM TRANSPORT
CASE NSN 6525-01-523-5953**

X-RAY APPARATUS RADIOGRAPHIC ACCESSORIES AND CONSUMABLES

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6525-01-523-5950	Gas Spring Portable Mobile Stand with 16" wheels	XGSMKIVLW	1	EA	\$2,921.10	\$2,921.10	MINXRAY.INC	N	N	2
6525-01-523-5953	Mil Spec Hardigg Sys Transport Case	HF100HSTC	1	EA	\$2,250.00	\$2,250.00	MINXRAY.INC	N	N	2
6150-01-528-7146	Power Cord (2 each 20') (no plug)	SJT-14/3 HG	2	EA	\$19.27	\$38.54	MINXRAY.INC	N	N	2
6525-01-524-2977	Exposure Cord (25' Coiled)	279-295	1	EA	\$23.53	\$23.53	MINXRAY.INC	N	N	2